
Black Dim to Warm Recessed Downlight Installation Instructions


Product Specifications

Model No.	HCP-81241911	HCP-81241913	HCP-81241914	HCP-81241915	HCP-81241917	HCP-81241918	HCP-81241919
Material	Aluminium + Plastic						
Colour	Black	Black + Gold	Black + Chrome	Black	Black + Gold	Black + Chrome	Black
Installation Type	Ceiling - Recessed						
IP Rating	IP54 - Front of Fitting Only						
Cut Out	Ø76mm	Ø76mm	Ø76mm	Ø90mm	Ø90mm	Ø90mm	Ø90mm
Input Voltage	240v (Remote Driver) ☐						
Protection Class	2 (No Earth Required)						
Lamp Base	Built in LED						
Lamp Wattage	1x 9w						
Colour Temp	Dim to Warm - 1800k-3000k						
Lumens	685lm						
CRI	> 80						
Dimmable	Dali 2 Dimmable						
Warranty	5 Years Replacement*						


76mm Cut Out Dimensions

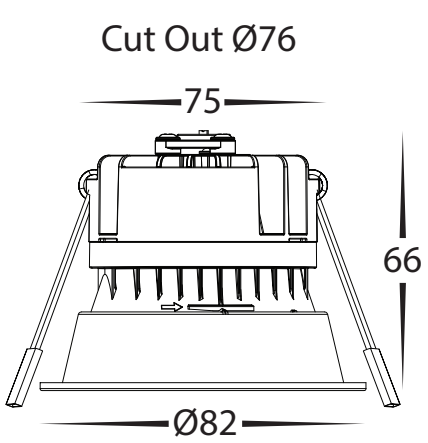

90mm Cut Out Dimensions

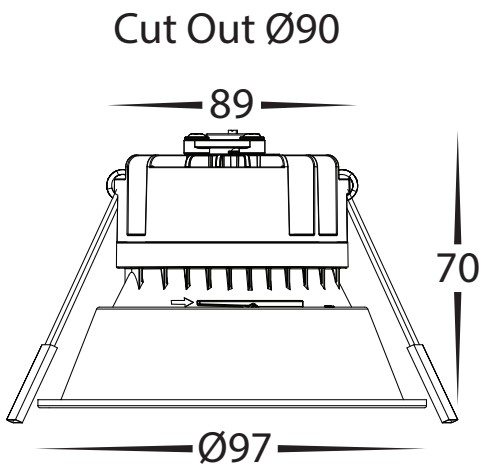

HCP-81241919 Cut Out Dimensions

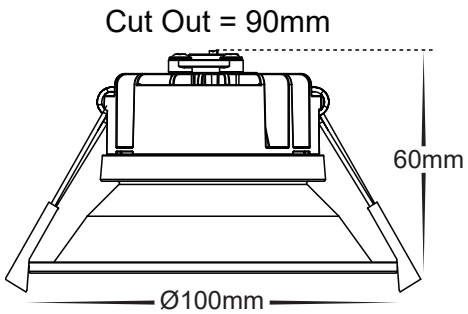


Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Commercial does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 5km of any salt water environments.
- All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Cut out hole using dimensions in table and on line drawings above for model purchased making sure each hole is not under joist or pipes.
3. Fitting is provided with flex and plug, Plug cable into plug base installed earlier.
4. Connect Dali Cable.
5. Before installing downlight, Make sure LED Driver is not covered by any insulation.
6. Pull back springs on fitting and insert into hole.
7. Once fitting is in hole, release clips, These springs will hold fitting in place.
8. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.

Sample Installation Diagram:

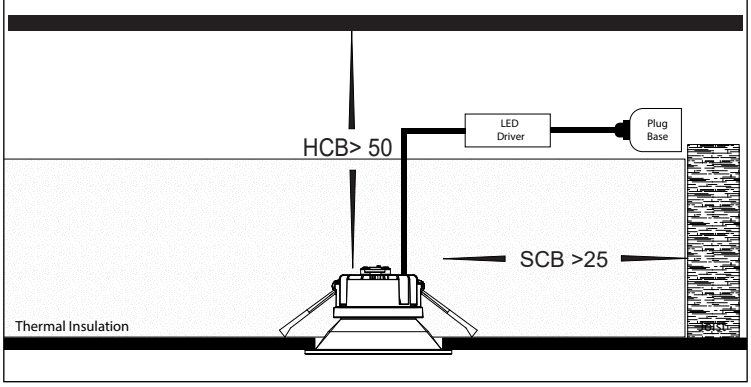

Must be installed by a licensed electrician

Contact Details:

8/133 Beauchamp Road
Matraville NSW 2036
Australia

Tel: 02 9381 8383
Email: sales@havitcommercial.com.au
Web: www.havitcommercial.com.au

Warranty Terms & Conditions*

www.havitcommercial.com.au