BATTEN LIGHTS

HCP-2381001 + HCP-2381002

White Indoor LED Battens



HCP-2381001



HCP-2381002

PRODUCT TYPE	Batten Light
DIMENSIONS LxWxH	604mm × 101mm x30mm 1204mm × 101mm x30mm
INSTALLATION TYPE	Ceiling - Surface Mounted
INPUT VOLTAGE	240v
PROTECTION CLASS	1- Earth Required
LED	20w - Built-in 40w - Built in
COLOUR TEMP.	TRI Colour · 3000K / 4000K / 5500K
IP RATING	IP20
IK RATING	IK04
BODY	Aluminium
DIMMABLE	No
APPROVALS	
WARRANTY	5 Years Replacement

IMPORTANT — READ BEFORE INSTALLATION

This is a 240V mains-voltage fitting. In Australia and New Zealand, fixed mains wiring must be carried out by a licensed electrician in accordance with AS/NZS 3000 (Wiring Rules).
Do not attempt to wire or connect this product yourself.

1 Important Safety Issues

- Installation must be carried out by a licensed electrician in accordance with AS/NZS 3000 wiring rules.
- Ensure mains power is disconnected before installation.
- Do not modify the fitting in any way, as this will void warranty.
- Aluminium fittings should not be installed within 5km of saltwater environments.
- Before drilling, cutting, or installing, ensure there are no concealed electrical cables, water pipes, or gas lines behind the mounting surface.
- Do not install the fitting on surfaces subject to excessive vibration or movement.
- The fitting must not be covered with insulation material or combustible materials.
- Do not install near heat sources, gas appliances, or areas with excessive ambient temperatures.
- Voltage to the fitting must be within ±5% of the rated input voltage
- Do not attempt to replace the built-in LED module, as it is non-serviceable.
- This product contains electronic components that must not be disposed of with general household waste.
- Avoid direct high-pressure water exposure from pressure washers or irrigation systems.
- Ensure drainage is maintained and the fitting is not installed in locations where water can pool around cable entries.
- Do not energise the fitting while partially assembled.
- Keep packaging materials away from children during installation.
- Allow fitting to cool before handling if recently operated.
- Isolate power before cleaning, maintenance, or inspection.
- Failure to follow installation instructions may result in electric shock, fire hazard, product failure, or voided warranty.
- Visit www.havit.com.au for full Warranty Terms & Conditions.

2 Technical Specifications

PART NUMBERS	COLOUR TEMP.	LUMEN OUTPUT	INCLUDED LED	INPUT
HCP-2381001	3000K	1950lm	20w 240v	240v
	4000K	2100lm		
	5500K	2025lm		
HCP-2381002	3000K	3900lm	40w 240v	240v
	4000K	4200lm		
	5500K	4050lm		


CONSTRUCTION

Body material	Aluminium
Finish	Poly Powder Coated Black or White
Fixings	Steel screws
Backing plate	Matching, supplied

RATINGS

Ingress protection	IP65
Total power	2x 5w
Beam direction	Up & Downwards
Suitability	Indoor / Outdoor

3 Product Dimensions

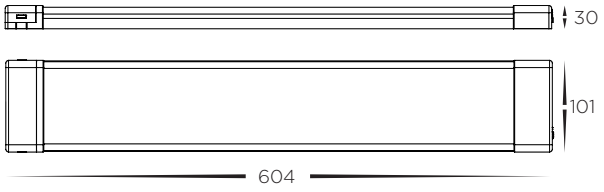

Overall height	30mm
Overall width	101mm
Overall length	604mm

HCP-2381001



Overall height	30mm
Overall width	101mm
Overall length	1204mm

HCP-2381002

All dimensions are nominal and in millimetres.
Verify against the physical product before drilling.

4 Safety Warnings

IMPORTANT — READ BEFORE INSTALLATION

This is a 240V mains-voltage fitting. In Australia and New Zealand, fixed mains wiring must be carried out by a licensed electrician in accordance with AS/NZS 3000 (Wiring Rules).
Do not attempt to wire or connect this product yourself.

Isolate mains power and lock-off / tag the circuit before wiring.

Confirm the supply matches the rating: 240v.

Do not connect a damaged fitting. Inspect the body, lens and gasket before install.

The integrated LED is not user-replaceable; do not open the sealed LED module.

5 In the Box

SUPPLIED

1 × Light Fitting

2 × Mounting Clips

6x Steel screws

6x wall plugs

1x Warranty Card


6 Mounting Template


The Mounting Clips has three Ø4mm mounting holes. Mark the Ceiling using the clip itself, or transfer the dimensions shown:

Mounting holes	3x Ø4mm
Hole vertical spacing	Centred
Hole offset from centre	25mm

NOTE

Diagram is not to scale when printed. Always verify dimensions against the physical backing plate before drilling.

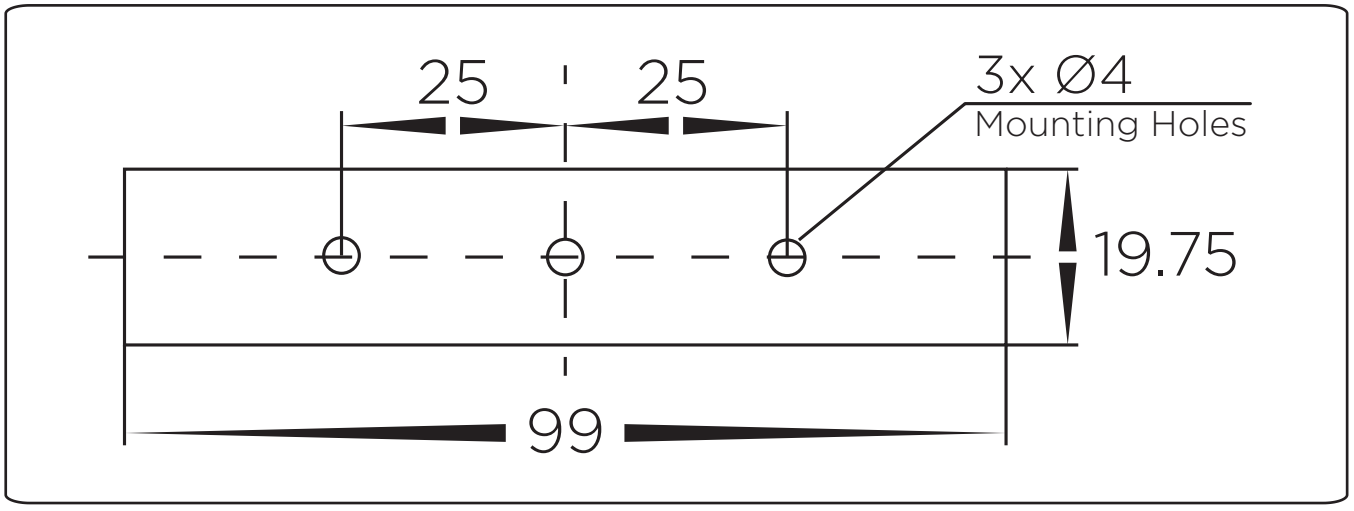



SET COLOUR TEMPERATURE

Use the TRI-colour selector switch on the fitting to choose 3000K, 4000K or 5500K **BEFORE** mounting. Match all fittings on the same façade for a consistent look.

7 Installation Procedure

1 Isolate the Power

Switch off the circuit at the switchboard, lock-off / tag it, and confirm the wiring is de-energised with a voltage tester.

3 Mark & Prepare Surface

Use the mounting bracket to mark hole positions. Mounting clips can be paosition anywehere along fitting. Drill and insert Wall plugs.

4 Secure the Mounting Bracket

Secure the mounting plate flush and level using screws provided.

5 Feed the Supply Cable

Remove cap on end of fitting to expose terminal block. Route the mains cable through the cable entry.

6 Connect the wiring

Locate the terminal box inside fitting.

A licensed electrician must connect the Active, Neutral, and Earth wires to the corresponding terminals, as shown below, and ensure all connections are secure.

7 Mount the body


Carefully tuck any excess cable into the ceiling space. Align the fitting body with the mounting clips and gently push it upwards until it is securely held in place.

8 Select Colour Temperature

With the power supply still safely isolated Set the required colour temperature by sliding the CCT selector switch located on the side of the fitting to the desired position: 3000K Warm White, 4000K Neutral White, or 5500K Cool White. Ensure the selector switch is fully engaged in the selected position.

9 Restore power & test

Re-energise and confirm fitting illuminates. Check the fitting is secure and sealed.



WIRING CONNECTIONS

Connect supply to matching terminals. Conductor colours per AS/NZS 3000:

Active — Brown **Earth — Green/Yellow** **Neutral — Blue**

9 Maintenance & Care

Always isolate power before cleaning or inspecting the fitting.

Wipe the body and lens with a soft, damp cloth — avoid solvents and abrasives that may damage the powder-coat finish.

Inspect fitting is secure and the body has not loosened over time.

10 Troubleshooting

SYMPTOM	POSSIBLE CAUSE	ACTION
Light does not turn on	Circuit not energised / wiring loose	Confirm power is on and have the electrician check terminal connections.
Wrong colour temperature	TRI-colour switch position	Isolate power, re-seat the body; if it persists, lodge a warranty claim.
Flickering	Loose connection or supply issue	Electrician to check connections and supply stability.

11 Warranty

5 YEARS
REPLACEMENT WARRANTY

IP20
INGRESS PROTECTION

240V
MAINS INPUT

This product carries a 5-year replacement warranty from Havit Commercial. Warranty applies to the original purchaser and is subject to correct installation by a licensed electrician and normal use in accordance with these instructions. Full warranty terms & conditions and product registration are available at havit.com.au. Retain your proof of purchase.

i REGISTER YOUR PRODUCT

Register your purchase and access data sheets, IES files and the latest installation documents at **havitcommercial.com.au/pages/resources**.

HAVIT COMMERCIAL

8/133 Beauchamp Road, Matraville NSW 2036
Phone: +61 (02) 9381 8383
Email: Sales@havitcommercial.com.au
Web: havitcommercial.com.au

Warranty Terms & Conditions

www.havitcommercial.com.au