
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:23.997V I:0.0592A P:1.4206W PF:1.0000 Freq:50.00Hz Lamp Flux:20.1978x1 lm		
NAME: HCP-271202 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA		Eff: 14.22 lm/W	
MODEL	HCP-271202 4000K	Imax(cd)	50.58	S/MH(C0/180)	0.51
NOMINAL POWER(W)	1	LOR(%)	100.0	S/MH(C90/270)	0.41
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	20.198	η UP,DN(C0-180)	0.0,68.9
NOMINAL FLUX(lm)	20.1978	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,31.1
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	23.997	η down(%)	100.0	CIBSE SHR MAX	0.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

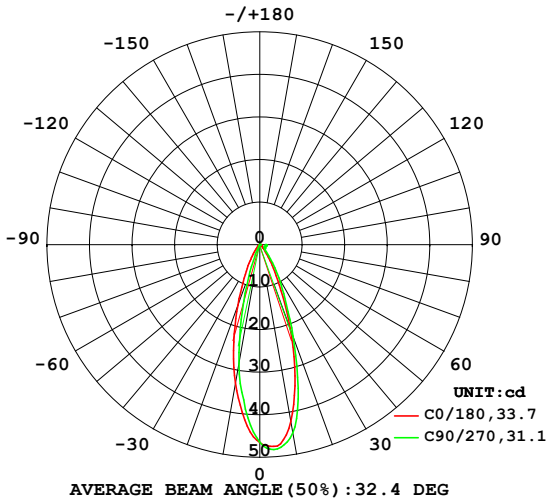

AVERAGE BEAM ANGLE(50%):32.4 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

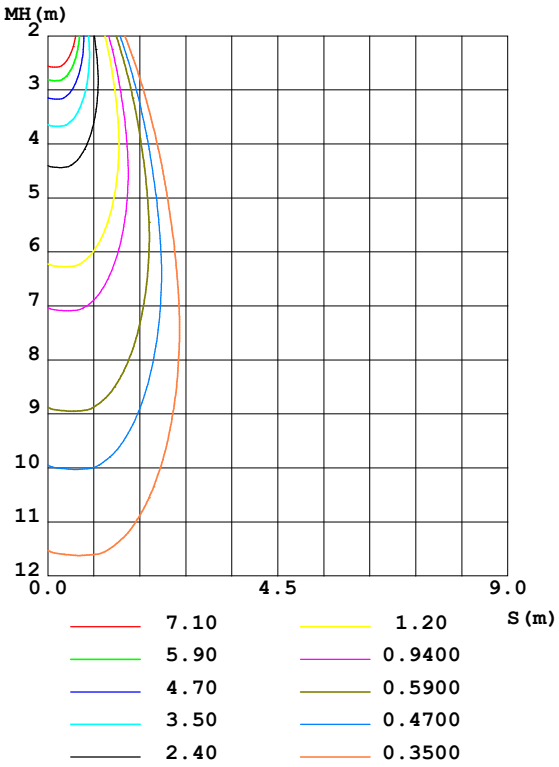

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-271202 4000K

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	42.15	46.97	44.96	38.35	33.05	27.31	28.41	34.88	0- 10	3.971	3.971	19.7,19.7
20	21.03	23.55	23.00	19.46	15.12	8.925	6.870	12.99	10- 20	7.227	11.20	55.4,55.4
30	6.516	8.827	9.057	6.958	5.128	1.361	0.3205	2.033	20- 30	4.338	15.54	76.9,76.9
40	1.879	2.893	3.027	2.323	1.404	0.1865	0.0910	0.1648	30- 40	1.825	17.36	86,86
50	0.6219	1.265	1.547	1.229	0.5121	0.0347	0.0303	0.0304	40- 50	0.7310	18.09	89.6,89.6
60	0.2955	1.025	1.312	1.047	0.3035	0	0	0	50- 60	0.5059	18.60	92.1,92.1
70	0.1348	1.055	1.333	1.073	0.0998	0	0	0	60- 70	0.4810	19.08	94.5,94.5
80	0.0347	1.212	1.563	1.368	0.0347	0	0	0	70- 80	0.5520	19.63	97.2,97.2
90	0	1.086	1.385	1.216	0.0304	0	0	0	80- 90	0.5670	20.20	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-13


γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-271202 4000K

LUMINANCE LIMITATION CURVES

Test:U:23.997V I:0.0592A P:1.4206W PF:1.0000 Freq:50.00Hz Lamp Flux:20.1978x1 lm		
NAME: HCP-271202 4000K	**TYPE:**	**WEIGHT:**
SPEC.:	**DIM.:**	**SERIAL No.:**
MFR.: ONIKE	**SUR.:**	**Shielding Angle:**

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

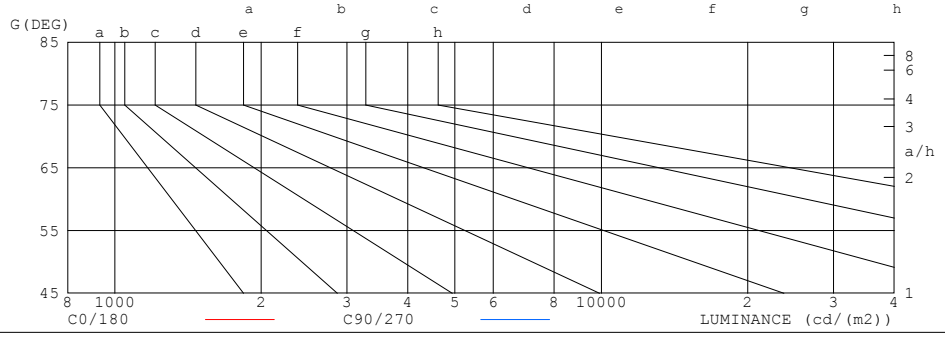

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	2	172
80	2	90
75	2	58
70	4	39
65	5	30
60	6	26
55	7	24
50	10	24
45	15	27


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-271202 4000K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:23.997V I:0.0592A P:1.4206W PF:1.0000 Freq:50.00Hz Lamp Flux:20.1978x1 lm		
NAME: HCP-271202 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.09	1.06	1.03	1.07	1.04	1.02	1.03	1.01	.99	.99	.97	.96	.95	.94	.93	.91
2.0	1.01	.97	.93	.00	.96	.92	.96	.93	.90	.93	.91	.88	.90	.88	.86	.85
3.0	.95	.90	.86	.94	.89	.85	.91	.87	.84	.88	.85	.82	.86	.83	.81	.79
4.0	.89	.84	.80	.88	.83	.79	.86	.82	.78	.84	.80	.77	.82	.79	.76	.75
5.0	.85	.79	.75	.84	.78	.74	.82	.77	.74	.80	.76	.73	.79	.75	.72	.71
6.0	.80	.75	.71	.80	.74	.70	.78	.73	.70	.77	.73	.69	.75	.72	.69	.68
7.0	.77	.71	.67	.76	.71	.67	.75	.70	.66	.74	.69	.66	.72	.69	.66	.64
8.0	.73	.68	.64	.73	.67	.64	.72	.67	.63	.71	.66	.63	.70	.66	.63	.62
9.0	.70	.65	.61	.70	.64	.61	.69	.64	.61	.68	.64	.60	.67	.63	.60	.59
10.0	.67	.62	.58	.67	.62	.58	.66	.61	.58	.65	.61	.58	.65	.61	.58	.57

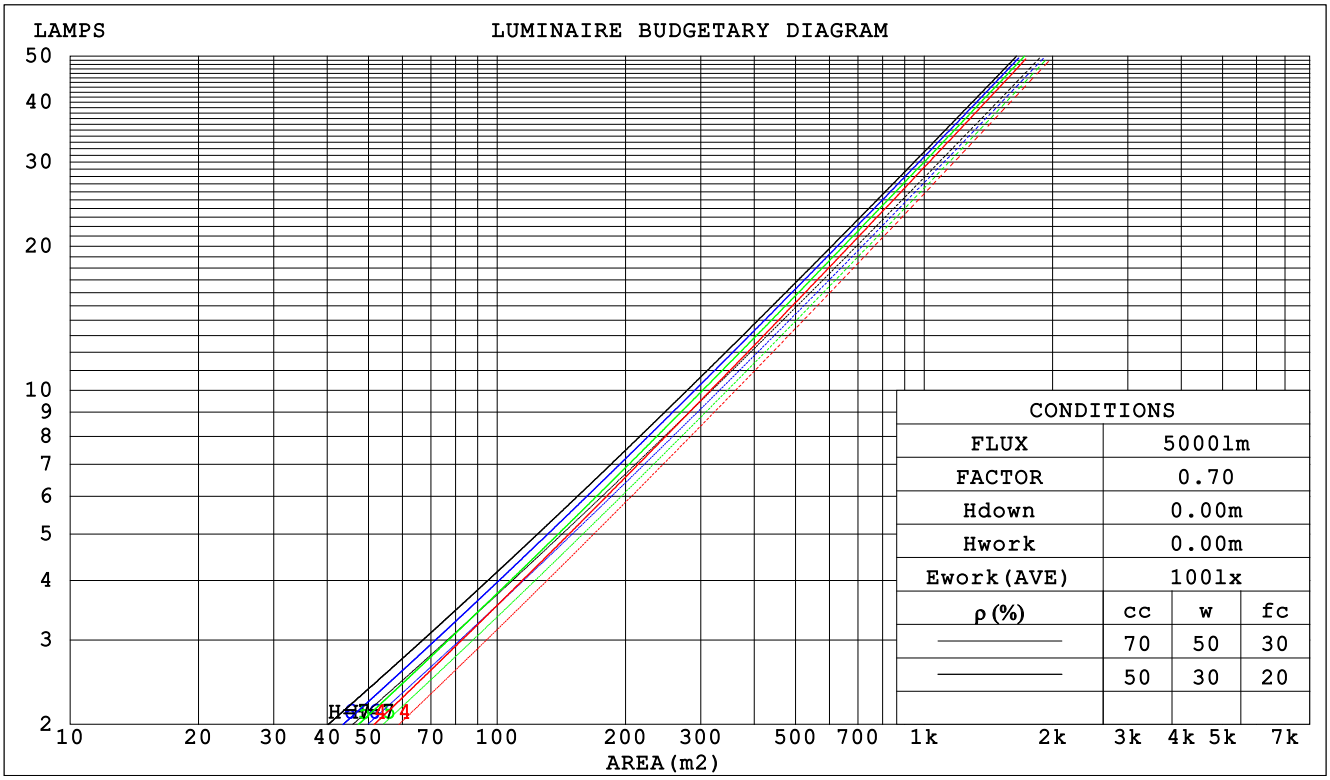

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-271202 4000K

WEC AND CCEC

Test:U:23.997V I:0.0592A P:1.4206W PF:1.0000 Freq:50.00Hz Lamp Flux:20.1978x1 lm		
NAME: HCP-271202 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.212	.121	.038	.205	.117	.037	.192	.110	.035	.181	.104	.033	.170	.098	.032	
2.0	.187	.103	.032	.182	.100	.031	.171	.095	.030	.161	.090	.028	.152	.086	.027	
3.0	.170	.091	.027	.165	.089	.027	.156	.085	.026	.148	.081	.025	.140	.078	.024	
4.0	.157	.081	.024	.153	.080	.024	.145	.077	.023	.138	.074	.022	.131	.071	.022	
5.0	.146	.074	.022	.142	.073	.021	.135	.070	.021	.129	.068	.020	.123	.066	.020	
6.0	.136	.068	.020	.133	.067	.019	.127	.065	.019	.122	.063	.019	.117	.061	.018	
7.0	.128	.064	.018	.126	.063	.018	.120	.061	.018	.116	.059	.017	.111	.058	.017	
8.0	.121	.059	.017	.119	.059	.017	.114	.057	.016	.110	.056	.016	.106	.054	.016	
9.0	.115	.056	.016	.113	.055	.015	.109	.054	.015	.105	.053	.015	.101	.052	.015	
10.0	.110	.053	.015	.108	.052	.015	.104	.051	.014	.101	.050	.014	.097	.049	.014	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.174	.157	.142	.148	.135	.122	.102	.093	.085	.058	.054	.049	.019	.017	.016	
2.0	.158	.132	.111	.136	.114	.096	.093	.079	.067	.054	.046	.039	.017	.015	.013	
3.0	.145	.114	.088	.125	.098	.077	.086	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.134	.099	.072	.115	.085	.063	.079	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.124	.087	.060	.107	.075	.052	.074	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.116	.078	.050	.100	.067	.044	.069	.047	.031	.040	.028	.018	.013	.009	.006	
7.0	.109	.070	.043	.094	.061	.037	.065	.043	.026	.038	.025	.016	.012	.008	.005	
8.0	.102	.064	.037	.088	.055	.032	.061	.039	.023	.036	.023	.014	.011	.007	.005	
9.0	.097	.058	.032	.083	.051	.028	.058	.036	.020	.034	.021	.012	.011	.007	.004	
10.0	.092	.054	.028	.079	.047	.025	.055	.033	.018	.032	.019	.010	.010	.006	.003	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-271202 4000K

UGR(Unified Glare Rating) Table

Test:U:23.997V I:0.0592A P:1.4206W PF:1.0000 Freq:50.00Hz Lamp Flux:20.1978x1 lm		
NAME: HCP-271202 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:

ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	8.5	9.4	8.7	9.6	9.8	11.1	12.1	11.4	12.2	12.4
	3H	9.3	10.2	9.6	10.4	10.6	13.8	14.7	14.1	14.9	15.1
	4H	9.7	10.5	10.0	10.7	11.0	15.9	16.7	16.2	17.0	17.2
	6H	10.0	10.8	10.3	11.0	11.3	18.4	19.1	18.7	19.4	19.6
	8H	10.2	10.9	10.5	11.2	11.4	19.7	20.4	20.0	20.7	20.9
	12H	10.2	11.0	10.6	11.3	11.5	21.1	21.8	21.4	22.1	22.4
4H	2H	9.7	10.5	10.0	10.7	11.0	11.7	12.5	11.9	12.7	12.9
	3H	11.3	12.0	11.6	12.3	12.6	14.9	15.6	15.2	15.9	16.1
	4H	12.2	12.9	12.6	13.2	13.5	17.2	17.9	17.6	18.2	18.5
	6H	13.0	13.7	13.4	14.0	14.3	19.9	20.5	20.3	20.9	21.2
	8H	13.4	14.0	13.8	14.3	14.7	21.3	21.9	21.7	22.3	22.6
	12H	13.7	14.2	14.1	14.6	15.0	22.9	23.4	23.3	23.8	24.1
8H	4H	14.3	14.9	14.7	15.2	15.6	17.8	18.4	18.2	18.7	19.1
	6H	15.9	16.3	16.3	16.7	17.2	20.9	21.3	21.3	21.7	22.1
	8H	16.6	17.0	17.1	17.5	17.9	22.5	22.9	22.9	23.3	23.8
	12H	17.2	17.6	17.6	18.0	18.5	24.2	24.6	24.7	25.1	25.5
12H	4H	15.1	15.6	15.5	16.0	16.4	17.9	18.4	18.3	18.8	19.2
	6H	17.0	17.4	17.4	17.8	18.3	21.1	21.5	21.5	21.9	22.4
	8H	18.0	18.4	18.5	18.8	19.3	22.8	23.2	23.3	23.6	24.1

Variations with the observer position at spacings:		
S = 1.0H	+ 0.2 / - 0.2	+ 0.1 / - 0.1
1.5H	+ 0.1 / - 0.1	+ 0.2 / - 0.2
2.0H	+ 0.3 / - 0.3	+ 0.3 / - 0.4

CIE Pub.117, 20.20 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -13.6)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-271202 4000K

UTILIZATION FACTORS TABLE

Test:U:23.997V I:0.0592A P:1.4206W PF:1.0000 Freq:50.00Hz Lamp Flux:20.1978x1 lm		
NAME: HCP-271202 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	83	76	72	83	76	72	82	76	72	68
0.80	91	84	79	90	83	79	89	83	79	75
1.00	95	88	84	94	88	84	92	88	83	79
1.25	99	93	89	98	92	88	96	91	88	83
1.50	102	96	92	101	96	92	98	94	91	85
2.00	105	100	96	104	99	95	101	97	94	88
2.50	107	102	99	106	101	98	102	99	96	89
3.00	109	105	101	107	103	100	104	101	98	91
4.00	112	108	105	109	106	104	106	103	101	93
5.00	113	110	107	111	108	106	107	105	103	95
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-271202 4000K

ISOCANDELA DIAGRAM

Test:U:23.997V I:0.0592A P:1.4206W PF:1.0000 Freq:50.00Hz Lamp Flux:20.1978x1 lm		
NAME: HCP-271202 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:

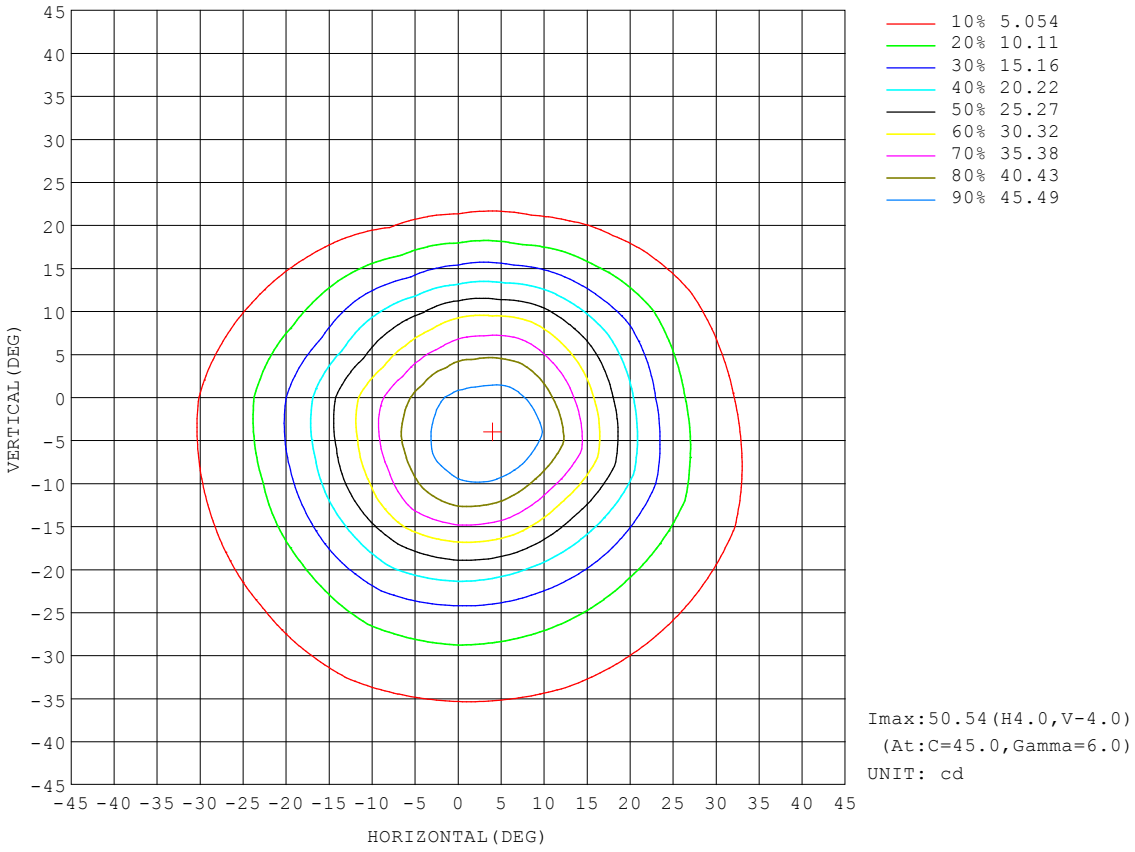


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-271202 4000K

AAI CURVES

Test:U:23.997V I:0.0592A P:1.4206W PF:1.0000 Freq:50.00Hz Lamp Flux:20.1978x1 lm		
NAME: HCP-271202 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:

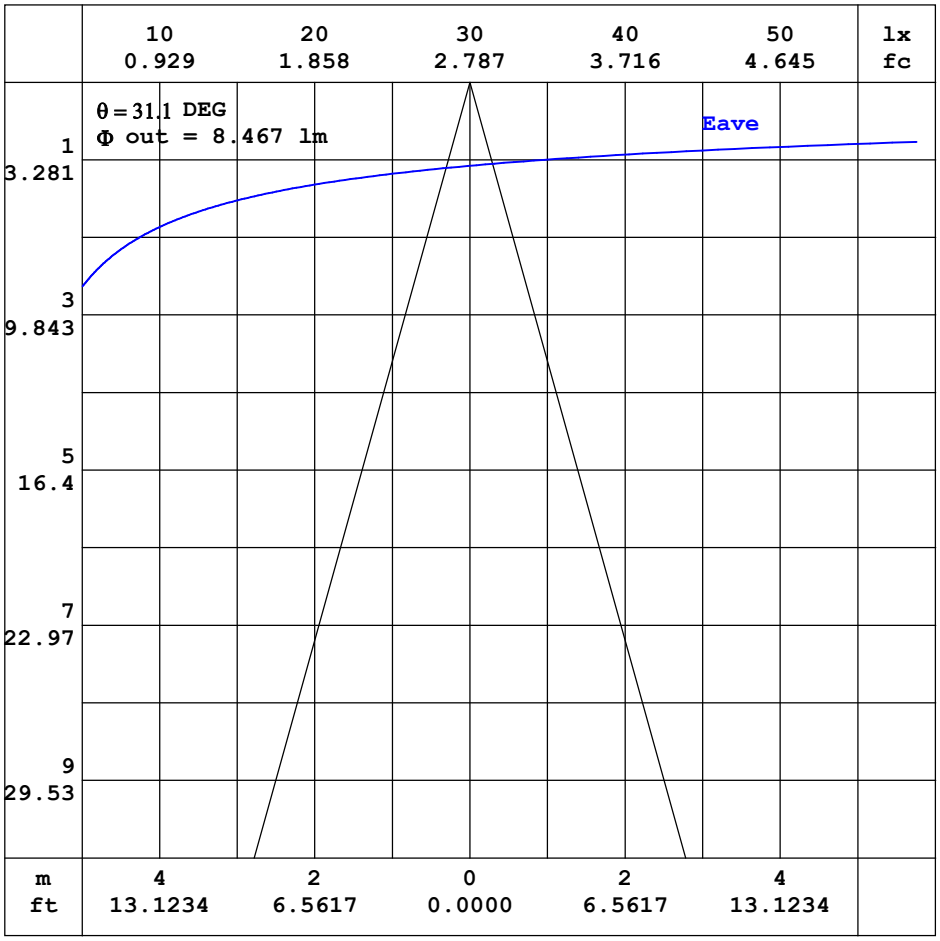


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-271202 4000K

ISOLUX DIAGRAM

Test:U:23.997V I:0.0592A P:1.4206W PF:1.0000 Freq:50.00Hz Lamp Flux:20.1978x1 lm		
NAME: HCP-271202 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:

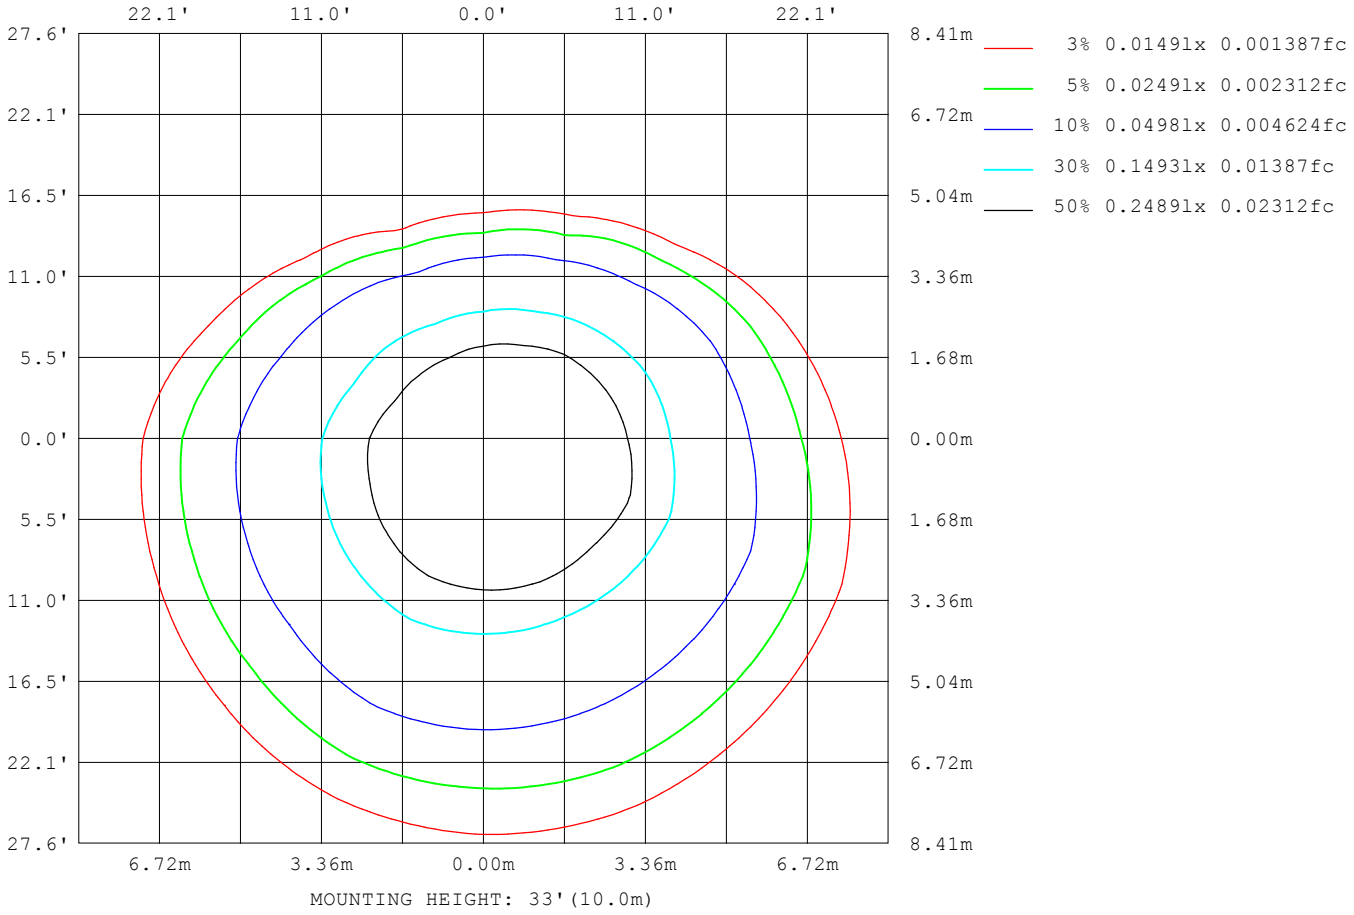

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-271202 4000K

LED Avg.L Report

Test:U:23.997V I:0.0592A P:1.4206W PF:1.0000 Freq:50.00Hz Lamp Flux:20.1978x1 lm		
NAME: HCP-271202 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	5
L_0~180(75)av	2
L_0~180(85)av	2
L_90~270(65)av	15
L_90~270(75)av	29
L_90~270(85)av	86
L_45(65)av	12
L_45(75)av	23
L_45(85)av	71

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-271202 4000K

Planar Illuminance Curve

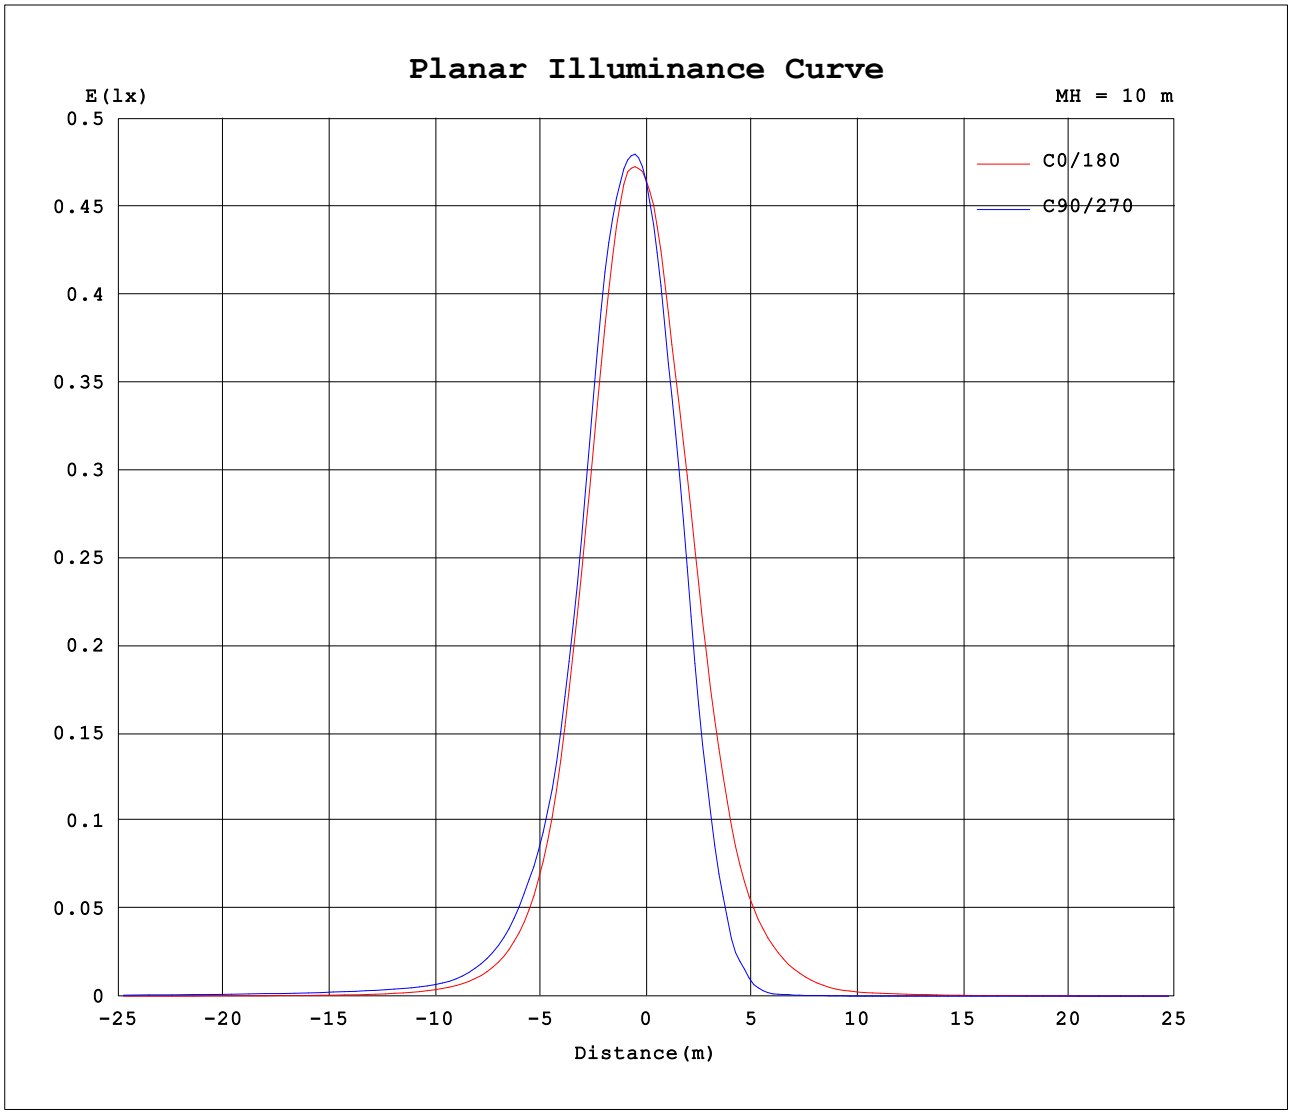

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-271202 4000K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:23.997V I:0.0592A P:1.4206W PF:1.0000 Freq:50.00Hz Lamp Flux:20.1978x1 lm		
NAME: HCP-271202 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:

Table--1 UNIT: cd

C(DEG) / γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	46.5	46.3	46.5	46.3	46.4	46.2	46.3	46.2	46.5	46.3	46.5	46.3	46.4	46.2	46.3	46.2			
5	47.5	49.8	50.5	49.5	48.2	46.7	45.0	43.0	41.3	39.0	38.1	37.7	38.8	40.0	42.5	44.8			
10	42.2	46.5	47.0	46.2	45.0	42.4	38.3	35.3	33.1	29.0	27.3	26.8	28.4	30.9	34.9	38.4			
15	32.0	36.8	35.6	35.8	35.0	33.3	29.3	25.9	23.7	19.1	17.3	15.2	15.9	18.7	23.9	28.2			
20	21.0	24.8	23.6	23.3	23.0	22.2	19.5	17.0	15.1	11.2	8.92	6.36	6.87	8.63	13.0	17.8			
25	11.9	15.2	14.9	14.4	14.2	13.7	11.7	9.72	8.76	6.03	3.67	1.97	2.06	2.95	5.79	9.77			
30	6.52	8.84	8.83	8.93	9.06	8.60	6.96	6.01	5.13	3.02	1.36	0.52	0.32	0.63	2.03	4.67			
35	3.52	5.18	5.28	5.45	5.25	4.97	3.95	3.35	2.82	1.51	0.47	0.20	0.13	0.20	0.58	2.10			
40	1.88	2.72	2.89	3.09	3.03	2.78	2.32	1.82	1.40	0.76	0.19	0.14	0.09	0.13	0.16	0.93			
45	1.05	1.55	1.74	1.81	1.88	1.69	1.47	1.06	0.71	0.39	0.10	0.09	0.03	0.09	0.08	0.42			
50	0.62	1.06	1.26	1.38	1.55	1.41	1.23	0.84	0.51	0.23	0.03	0.06	0.03	0.06	0.03	0.22			
55	0.41	0.82	1.08	1.21	1.40	1.27	1.12	0.80	0.38	0.16	0.03	0.04	0.00	0.03	0.03	0.13			
60	0.30	0.78	1.03	1.19	1.31	1.20	1.05	0.76	0.30	0.10	0.00	0.00	0.00	0.00	0.00	0.07			
65	0.21	0.73	1.02	1.20	1.25	1.19	1.03	0.77	0.19	0.06	0.00	0.00	0.00	0.00	0.00	0.05			
70	0.13	0.66	1.06	1.28	1.33	1.28	1.07	0.78	0.10	0.04	0.00	0.00	0.00	0.00	0.00	0.03			
75	0.06	0.66	1.12	1.43	1.49	1.44	1.22	0.86	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.01			
80	0.03	0.66	1.21	1.52	1.56	1.50	1.37	0.94	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00			
85	0.01	0.60	1.19	1.44	1.49	1.37	1.29	0.83	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
90	0.00	0.60	1.09	1.36	1.39	1.30	1.22	0.83	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-271202 4000K