
LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: HCP-3426250-1M R	TYPE: 2835 R	WEIGHT:
SPEC.:	DIM.: 1*0.012	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA		Eff: 26.46 lm/W	
MODEL	HCP-3426250	Imax(cd)	40.94	S/MH(C0/180)	1.30
NOMINAL POWER(W)	20	LOR(%)	100.0	S/MH(C90/270)	1.33
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	134.79	η UP,DN(C0-180)	0.0,51.1
NOMINAL FLUX(lm)	134.788	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,48.9
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	24	η down(%)	100.0	CIBSE SHR MAX	1.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

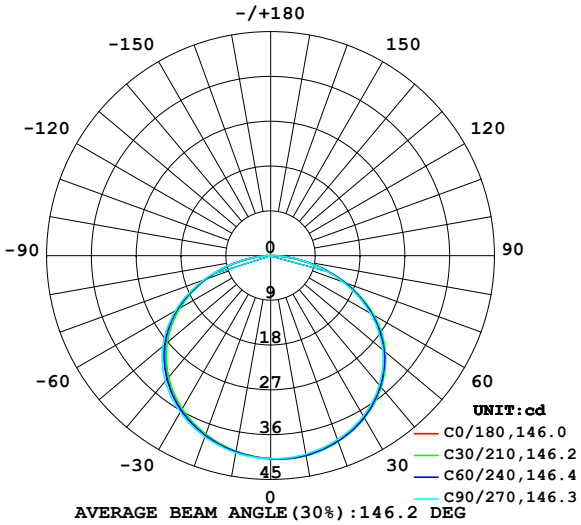

AVERAGE BEAM ANGLE(30%):146.2 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

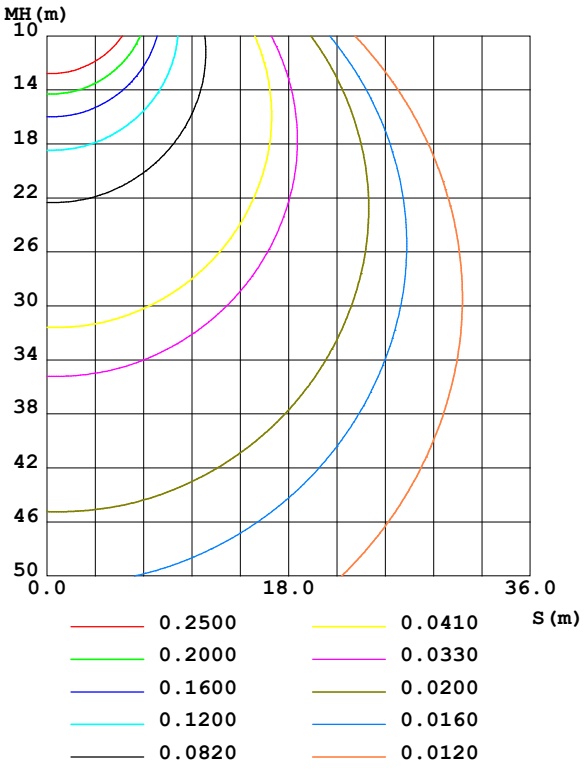

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JING
Test Date:2022-05-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	40.81	40.77	40.50	40.17	39.96	40.01	40.23	40.52	0- 10	3.875	3.875	2.87,2.87
20	39.66	39.69	39.32	38.65	38.24	38.32	38.73	39.20	10- 20	11.24	15.12	11.2,11.2
30	37.51	37.64	37.22	36.25	35.64	35.77	36.35	36.96	20- 30	17.51	32.63	24.2,24.2
40	34.35	34.41	33.93	32.81	31.98	32.18	32.97	33.67	30- 40	21.98	54.61	40.5,40.5
50	29.90	29.92	29.39	28.31	27.29	27.50	28.32	29.16	40- 50	24.05	78.66	58.4,58.4
60	23.66	23.73	23.12	22.32	21.14	21.40	22.11	22.94	50- 60	23.08	101.7	75.5,75.5
70	15.82	15.93	15.33	14.79	13.71	13.89	14.37	15.12	60- 70	18.64	120.4	89.3,89.3
80	7.028	7.224	7.003	6.603	5.891	5.750	5.879	6.410	70- 80	11.29	131.7	97.7,97.7
90	0.2497	0.2778	0.1388	0.3494	0.2912	0.1198	0.0003	0.1127	80- 90	3.062	134.7	100,100
100	0	0	0	0	0	0	0	0	90-100	0.0200	134.8	100,100
110	0	0	0	0	0	0	0	0	100-110	0	134.8	100,100
120	0	0	0.0000	0	0.0000	0.0014	0	0.0014	110-120	0.0000	134.8	100,100
130	0	0.0029	0.0059	0.0044	0.0116	0.0044	0	0.0044	120-130	0.0016	134.8	100,100
140	0	0.0073	0.0175	0.0088	0.0203	0.0087	0	0.0088	130-140	0.0052	134.8	100,100
150	0.0058	0.0102	0.0234	0.0204	0.0262	0.0204	0.0204	0.0189	140-150	0.0077	134.8	100,100
160	0.0174	0.0233	0.0262	0.0263	0.0291	0.0233	0.0204	0.0263	150-160	0.0101	134.8	100,100
170	0.0232	0.0248	0.0262	0.0263	0.0262	0.0262	0.0233	0.0263	160-170	0.0071	134.8	100,100
180	0.0262	0.0262	0.0262	0.0277	0.0262	0.0291	0.0262	0.0263	170-180	0.0025	134.8	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

0 - 60 DEG Zonal Flux:101.73 %lum: 75.5%
0 - 60 DEG Zonal Flux:101.73 %lum: 75.5%
All measured values may vary less than 35 %
from the average measured value in the 0 to 130 deg. zone: 13.4%
All measured values in the 0 to 130 deg. zone
may vary less than 50% from the average value of itself: 19.3%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JING
Test Date:2022-05-23


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

NAME: HCP-3426250-1M R	**TYPE: 2835 R**	**WEIGHT:**
SPEC.:	**DIM.: 1*0.012**	**SERIAL No.:**
MFR.: HAVIT COMMERCIAL	**SUR.:**	**Shielding Angle:**

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

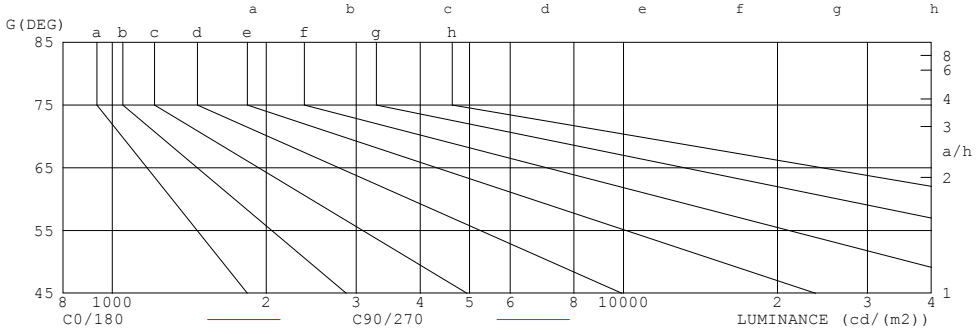

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	316	353
80	406	403
75	446	434
70	464	448
65	472	458
60	474	462
55	472	461
50	466	457
45	458	450

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JING
Test Date:2022-05-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:


CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: HCP-3426250-1M R	TYPE: 2835 R	WEIGHT:
SPEC.:	DIM.: 1*0.012	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.03	.98	.94	1.01	.97	.93	.96	.93	.90	.92	.90	.87	.89	.87	.84	.82
2.0	.89	.82	.76	.87	.80	.75	.83	.78	.73	.80	.75	.71	.77	.73	.70	.67
3.0	.78	.69	.62	.76	.68	.62	.73	.66	.60	.70	.64	.59	.67	.62	.58	.56
4.0	.68	.59	.52	.67	.58	.52	.64	.57	.51	.62	.55	.50	.60	.54	.49	.47
5.0	.61	.51	.44	.60	.51	.44	.57	.50	.44	.55	.48	.43	.53	.47	.43	.40
6.0	.54	.45	.38	.53	.45	.38	.52	.44	.38	.50	.43	.38	.48	.42	.37	.35
7.0	.49	.40	.34	.48	.40	.34	.47	.39	.33	.45	.38	.33	.44	.38	.33	.31
8.0	.45	.36	.30	.44	.36	.30	.43	.35	.30	.41	.34	.29	.40	.34	.29	.27
9.0	.41	.32	.27	.40	.32	.27	.39	.32	.27	.38	.31	.26	.37	.31	.26	.24
10.0	.38	.30	.24	.37	.29	.24	.36	.29	.24	.35	.29	.24	.34	.28	.24	.22

LAMPS

LUMINAIRE BUDGETARY DIAGRAM

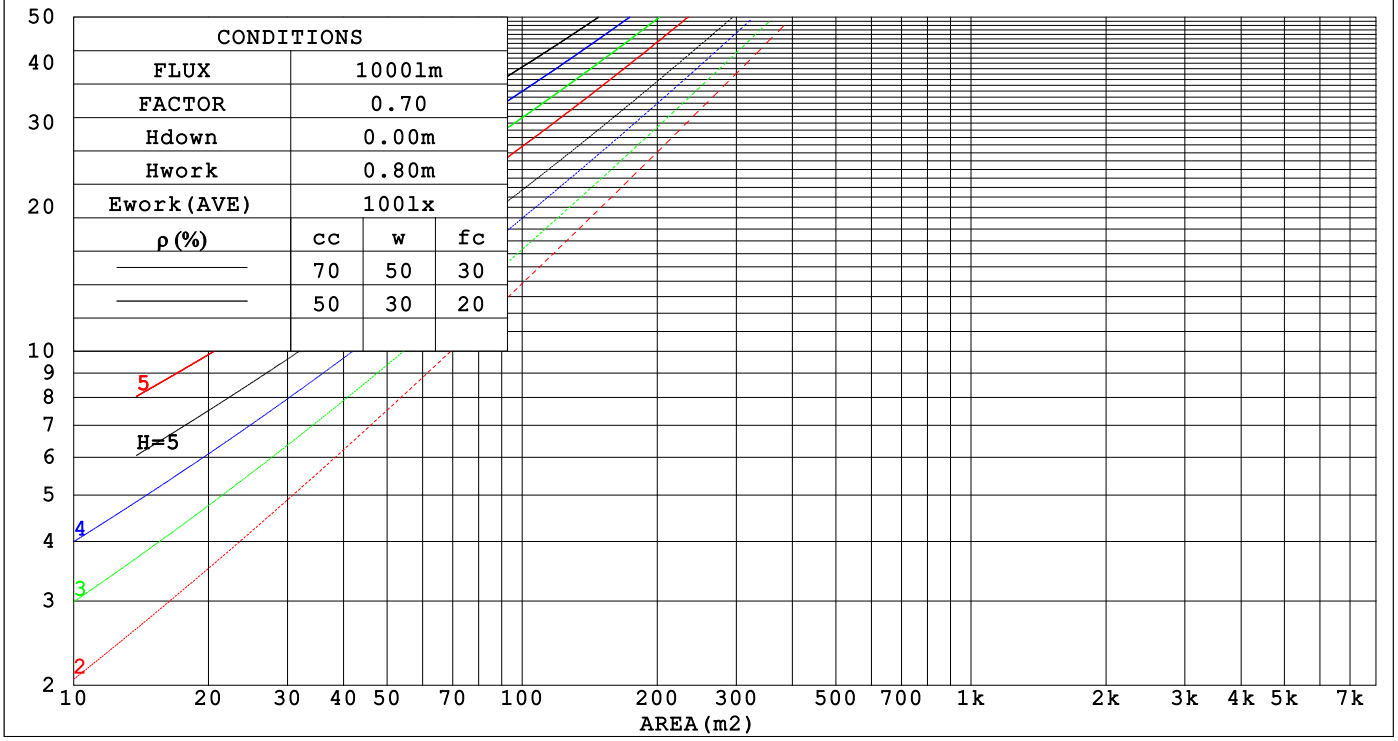

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JING
Test Date:2022-05-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: HCP-3426250-1M R	TYPE: 2835 R	WEIGHT:
SPEC.:	DIM.: 1*0.012	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Wall Exitance Coeffcients(WEC)												
0.0																
1.0	.327	.186	.059	.320	.183	.058	.307	.176	.056	.294	.170	.054	.283	.164	.053	
2.0	.306	.168	.051	.300	.165	.051	.288	.160	.050	.277	.155	.049	.267	.151	.048	
3.0	.282	.150	.045	.276	.148	.045	.266	.144	.044	.256	.140	.043	.247	.137	.042	
4.0	.259	.134	.040	.254	.133	.039	.245	.130	.039	.236	.127	.038	.228	.124	.038	
5.0	.238	.121	.035	.234	.120	.035	.226	.117	.035	.218	.115	.034	.211	.113	.034	
6.0	.220	.110	.032	.216	.109	.031	.209	.107	.031	.202	.105	.031	.196	.103	.031	
7.0	.204	.101	.029	.201	.100	.029	.194	.098	.028	.188	.096	.028	.182	.095	.028	
8.0	.190	.093	.026	.187	.092	.026	.181	.091	.026	.176	.089	.026	.171	.088	.026	
9.0	.178	.086	.024	.175	.085	.024	.170	.084	.024	.165	.083	.024	.160	.081	.024	
10.0	.167	.080	.022	.165	.080	.022	.160	.078	.022	.155	.077	.022	.151	.076	.022	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.182	.156	.133	.156	.134	.115	.106	.092	.079	.061	.053	.046	.020	.017	.015	
2.0	.174	.132	.097	.149	.114	.084	.102	.079	.058	.059	.046	.034	.019	.015	.011	
3.0	.167	.115	.073	.143	.099	.063	.098	.069	.044	.057	.040	.026	.018	.013	.009	
4.0	.160	.102	.057	.137	.088	.050	.094	.061	.035	.054	.036	.021	.018	.012	.007	
5.0	.152	.091	.046	.131	.079	.040	.090	.055	.028	.052	.032	.017	.017	.011	.006	
6.0	.145	.083	.038	.124	.072	.034	.086	.050	.024	.050	.030	.014	.016	.010	.005	
7.0	.138	.076	.033	.119	.066	.029	.082	.046	.020	.048	.027	.012	.015	.009	.004	
8.0	.131	.070	.028	.113	.061	.025	.078	.043	.018	.045	.025	.010	.015	.008	.003	
9.0	.125	.065	.025	.108	.057	.022	.075	.040	.015	.043	.024	.009	.014	.008	.003	
10.0	.119	.061	.022	.103	.053	.020	.071	.037	.014	.042	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JING
Test Date:2022-05-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: HCP-3426250-1M R	TYPE: 2835 R	WEIGHT:
SPEC.:	DIM.: 1*0.012	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	17.6	19.2	17.9	19.4	19.6	17.5	19.1	17.8	19.3	19.5
	3H	19.4	20.9	19.7	21.1	21.3	19.2	20.7	19.5	20.9	21.2
	4H	20.1	21.5	20.4	21.8	22.0	20.0	21.4	20.3	21.6	21.9
	6H	20.7	22.0	21.0	22.3	22.5	20.5	21.8	20.8	22.1	22.4
	8H	20.8	22.1	21.2	22.4	22.7	20.7	21.9	21.0	22.2	22.5
	12H	20.9	22.1	21.3	22.4	22.7	20.8	22.0	21.1	22.3	22.6
4H	2H	18.3	19.7	18.6	20.0	20.2	18.2	19.6	18.5	19.9	20.1
	3H	20.3	21.5	20.6	21.8	22.1	20.1	21.4	20.5	21.7	22.0
	4H	21.1	22.3	21.5	22.6	22.9	21.0	22.1	21.4	22.4	22.8
	6H	21.8	22.8	22.2	23.2	23.5	21.7	22.7	22.1	23.0	23.4
	8H	22.0	23.0	22.5	23.3	23.7	21.9	22.8	22.3	23.2	23.6
	12H	22.2	23.0	22.6	23.4	23.8	22.1	22.9	22.5	23.3	23.7
8H	4H	21.5	22.4	21.9	22.8	23.2	21.3	22.3	21.8	22.6	23.0
	6H	22.3	23.1	22.8	23.5	23.9	22.2	22.9	22.6	23.4	23.8
	8H	22.6	23.3	23.1	23.7	24.2	22.5	23.2	23.0	23.6	24.1
	12H	22.8	23.4	23.3	23.9	24.4	22.7	23.3	23.2	23.8	24.3
12H	4H	21.5	22.3	21.9	22.7	23.1	21.4	22.2	21.8	22.6	23.0
	6H	22.4	23.1	22.8	23.5	23.9	22.3	22.9	22.7	23.4	23.8
	8H	22.8	23.3	23.2	23.8	24.3	22.6	23.2	23.1	23.7	24.1

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.1 / - 0.2	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.4	+ 0.2 / - 0.4

CIE Pub.117, 134.8 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -7.0)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JING
Test Date:2022-05-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: HCP-3426250-1M R	TYPE: 2835 R	WEIGHT:
SPEC.:	DIM.: 1*0.012	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	55	43	36	54	43	36	53	42	36	29
0.80	65	53	45	64	53	45	62	52	45	38
1.00	74	62	54	73	61	54	70	63	54	46
1.25	81	70	62	80	69	62	77	68	61	54
1.50	86	76	68	84	75	68	81	73	67	59
2.00	93	84	77	91	83	77	88	81	75	67
2.50	98	89	83	95	88	82	92	85	80	72
3.00	101	94	88	99	92	87	95	89	85	76
4.00	105	99	94	103	98	93	99	94	90	81
5.00	108	103	99	105	101	97	101	97	94	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JING
Test Date:2022-05-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: HCP-3426250-1M R	TYPE: 2835 R	WEIGHT:
SPEC.:	DIM.: 1*0.012	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

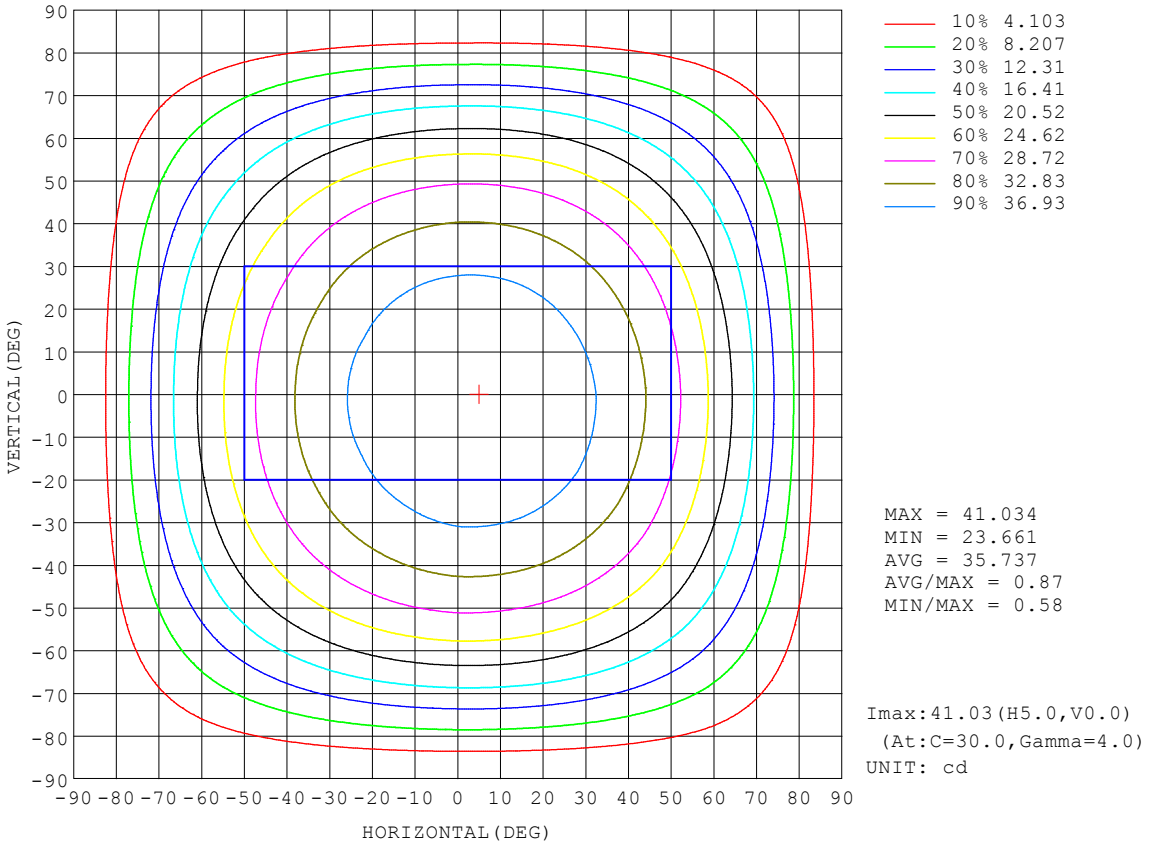


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JING
Test Date:2022-05-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:

AAI Figure

NAME: HCP-3426250-1M R	TYPE: 2835 R	WEIGHT:
SPEC.:	DIM.: 1*0.012	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

Flux out:107.9 lm

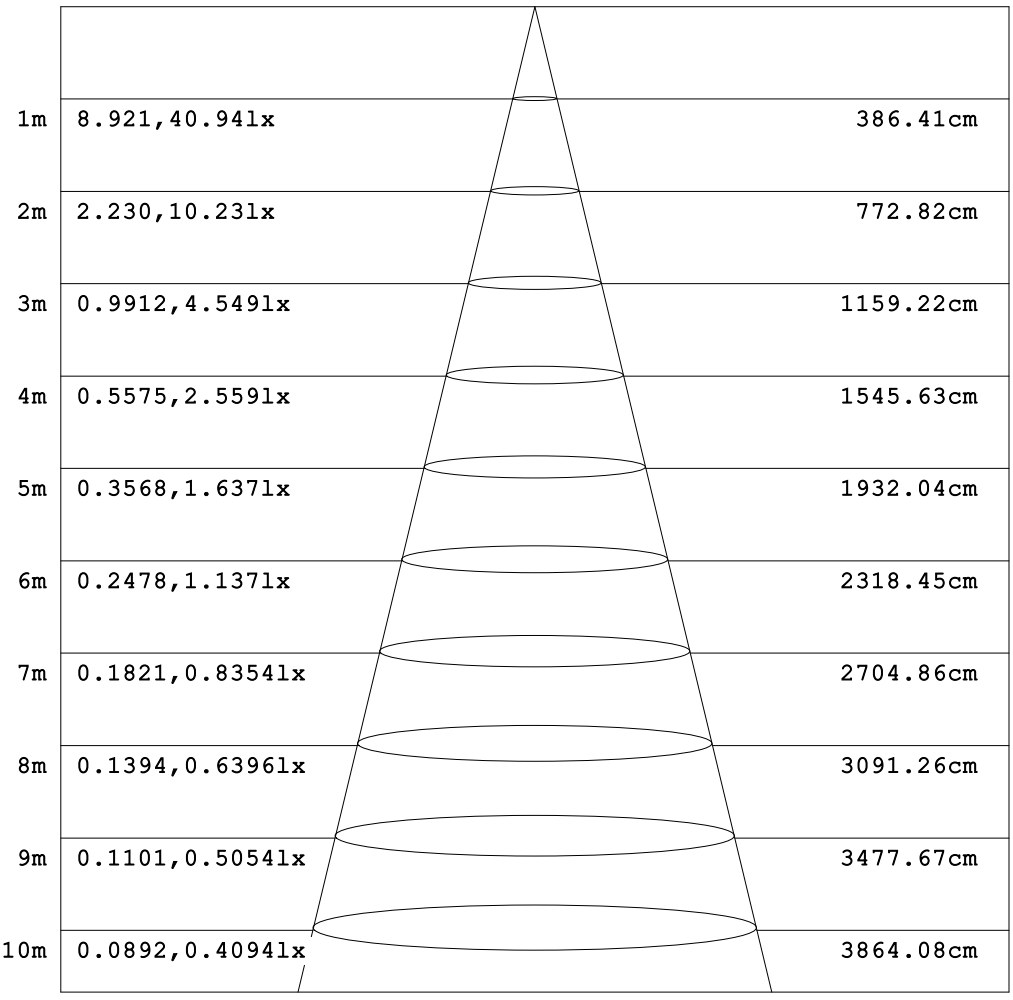


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JING
Test Date:2022-05-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: HCP-3426250-1M R	TYPE: 2835 R	WEIGHT:
SPEC.:	DIM.: 1*0.012	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

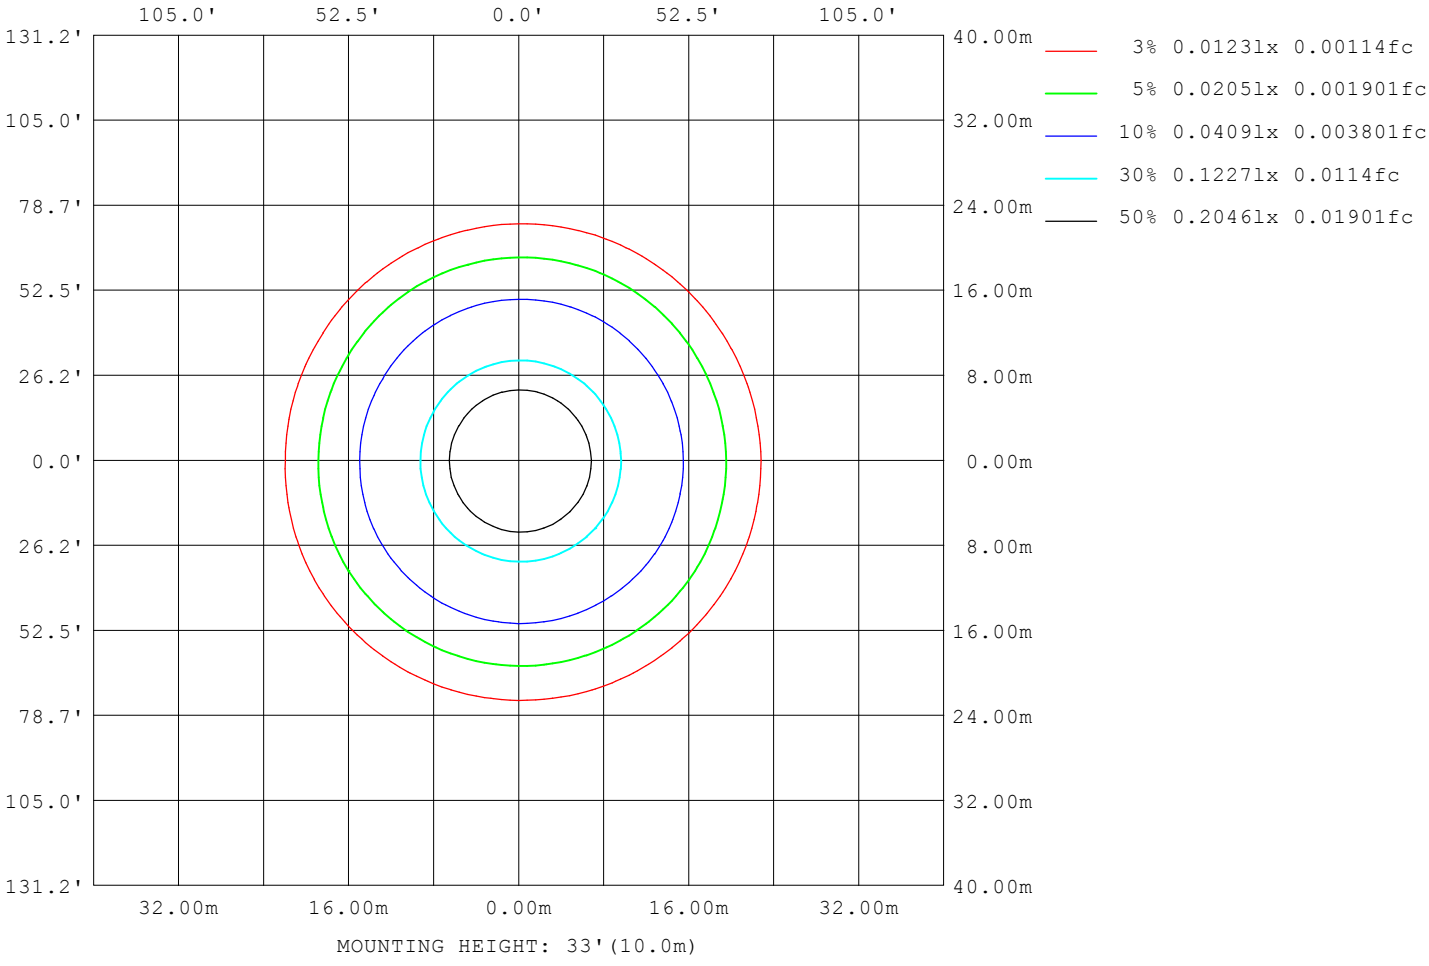

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JING
Test Date:2022-05-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: HCP-3426250-1M R	TYPE: 2835 R	WEIGHT:
SPEC.:	DIM.: 1*0.012	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	443
L_0~180(75)av	411
L_0~180(85)av	292
L_90~270(65)av	447
L_90~270(75)av	413
L_90~270(85)av	281
L_45(65)av	448
L_45(75)av	416
L_45(85)av	291

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JING
Test Date:2022-05-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:

Planar Illuminance Curve

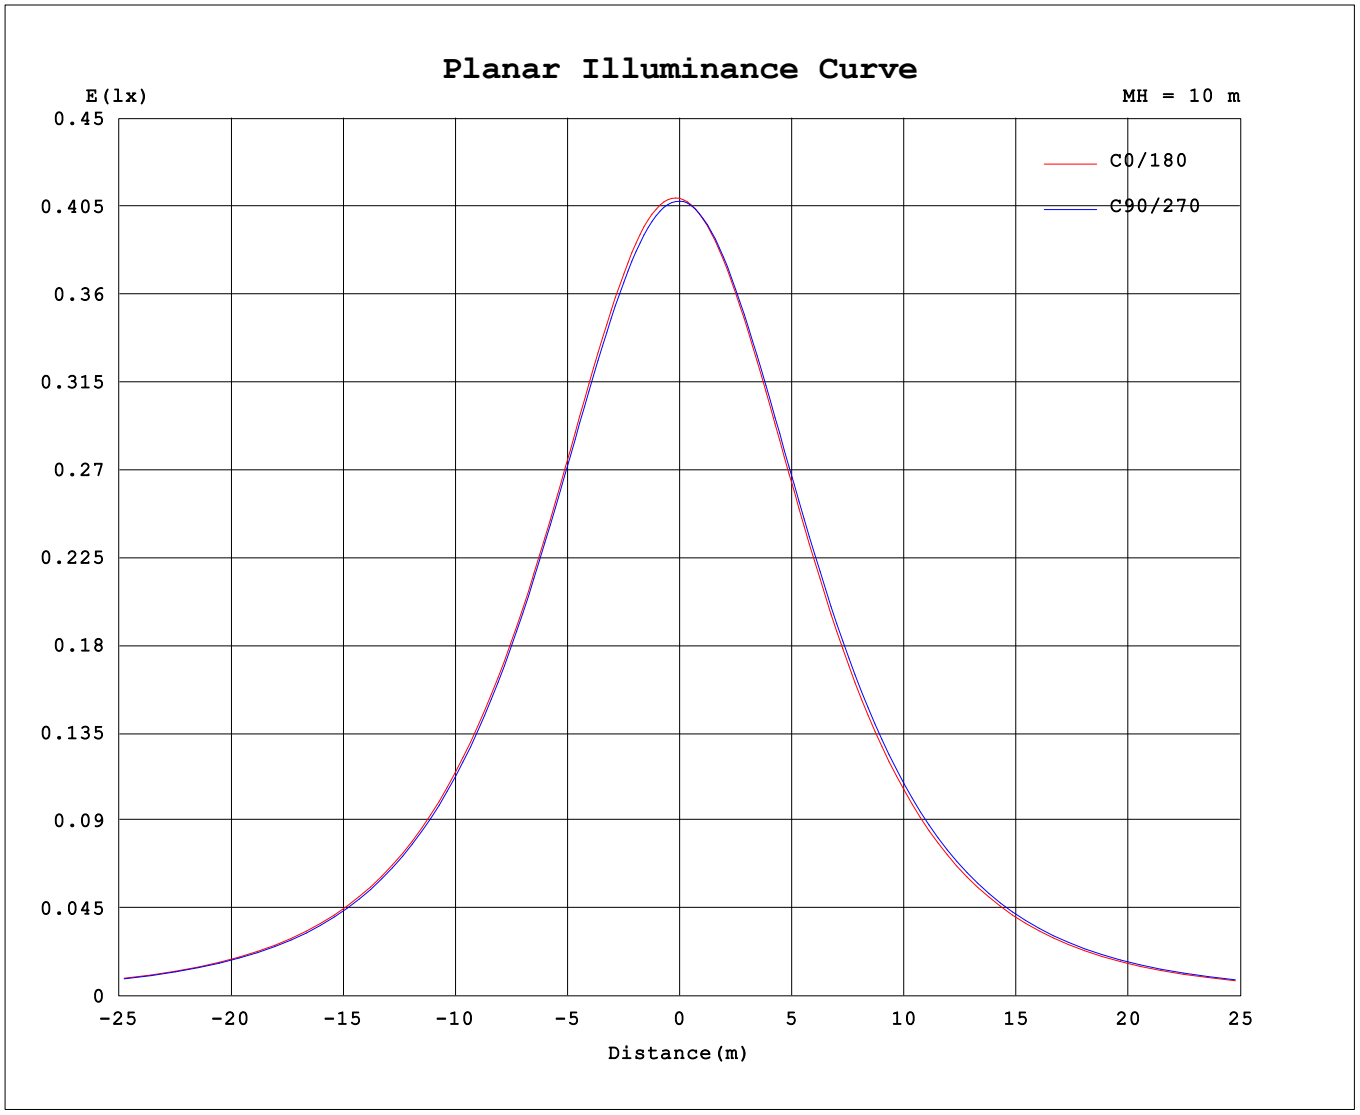

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JING
Test Date:2022-05-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: HCP-3426250-1M R	TYPE: 2835 R	WEIGHT:
SPEC.:	DIM.: 1*0.012	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	40.8	40.8	40.8	40.8	40.8	40.8	40.8	40.8	40.8	40.8	40.8	40.8							
5	40.9	40.9	40.9	40.8	40.7	40.5	40.5	40.5	40.5	40.6	40.7	40.9							
10	40.8	40.8	40.7	40.5	40.3	40.1	40.0	40.0	40.1	40.2	40.4	40.6							
15	40.3	40.4	40.3	40.0	39.7	39.4	39.2	39.2	39.3	39.6	39.8	40.1							
20	39.7	39.7	39.6	39.3	38.9	38.4	38.2	38.2	38.5	38.7	39.1	39.3							
25	38.7	38.8	38.7	38.4	37.8	37.3	37.1	37.0	37.3	37.7	38.1	38.4							
30	37.5	37.7	37.6	37.2	36.5	36.0	35.6	35.6	36.0	36.3	36.8	37.1							
35	36.1	36.3	36.1	35.8	35.0	34.4	33.9	33.9	34.3	34.8	35.3	35.6							
40	34.4	34.5	34.3	33.9	33.2	32.5	32.0	31.9	32.4	33.0	33.4	33.9							
45	32.3	32.5	32.2	31.8	31.1	30.3	29.8	29.7	30.3	30.8	31.4	31.8							
50	29.9	30.1	29.8	29.4	28.7	28.0	27.3	27.2	27.8	28.3	28.9	29.4							
55	27.0	27.3	26.9	26.4	25.9	25.2	24.4	24.3	25.0	25.4	26.1	26.5							
60	23.7	24.0	23.5	23.1	22.6	22.1	21.1	21.1	21.7	22.1	22.7	23.1							
65	19.9	20.2	19.8	19.4	19.0	18.4	17.5	17.6	18.0	18.4	19.0	19.4							
70	15.8	16.1	15.8	15.3	15.0	14.5	13.7	13.7	14.1	14.4	14.9	15.3							
75	11.5	11.8	11.5	11.2	10.9	10.5	9.79	9.73	9.92	10.2	10.6	11.0							
80	7.03	7.33	7.12	7.00	6.75	6.46	5.89	5.71	5.79	5.88	6.22	6.60							
85	2.75	3.10	3.07	3.08	2.86	2.70	2.34	2.04	1.93	1.82	2.19	2.40							
90	0.25	0.30	0.25	0.14	0.32	0.37	0.29	0.16	0.08	0.00	0.06	0.16							
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00							
125	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.01	0.00	0.00	0.00							
130	0.00	0.01	0.00	0.01	0.00	0.01	0.01	0.00	0.01	0.00	0.01	0.00							
135	0.00	0.01	0.00	0.01	0.00	0.01	0.02	0.00	0.02	0.00	0.01	0.00							
140	0.00	0.01	0.00	0.02	0.00	0.02	0.02	0.00	0.02	0.00	0.02	0.00							
145	0.00	0.02	0.00	0.02	0.00	0.02	0.02	0.01	0.02	0.01	0.02	0.00							
150	0.01	0.02	0.00	0.02	0.02	0.02	0.03	0.02	0.02	0.02	0.03	0.01							
155	0.01	0.02	0.01	0.02	0.02	0.03	0.03	0.02	0.03	0.02	0.03	0.02							
160	0.02	0.03	0.02	0.03	0.02	0.03	0.03	0.02	0.03	0.02	0.03	0.02							
165	0.02	0.03	0.02	0.03	0.02	0.03	0.03	0.02	0.03	0.02	0.03	0.02							
170	0.02	0.03	0.02	0.03	0.02	0.03	0.03	0.03	0.03	0.02	0.03	0.02							
175	0.02	0.03	0.03	0.03	0.02	0.03	0.03	0.03	0.03	0.03	0.03	0.03							
180	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JING
Test Date:2022-05-23

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks: