


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: HCP-3456350 RGB	TYPE: 2835 RGB	WEIGHT:
SPEC.:	DIM.: 1*0.01	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 44.52 lm/W
MODEL	HCP-3456350	Imax (cd)	145.4	S/MH(C0/180)	1.38	
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.40	
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	534.21	η UP,DN(C0-180)	1.2,47.7	
NOMINAL FLUX(lm)	534.213	CIE CLASS	DIRECT	η UP,DN(C180-360)	1.1,50.1	
LAMPS INSIDE	1	η up (%)	2.3	CIBSE SHR NOM	1.50	
TEST VOLTAGE(V)	24	η down (%)	97.7	CIBSE SHR MAX	1.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

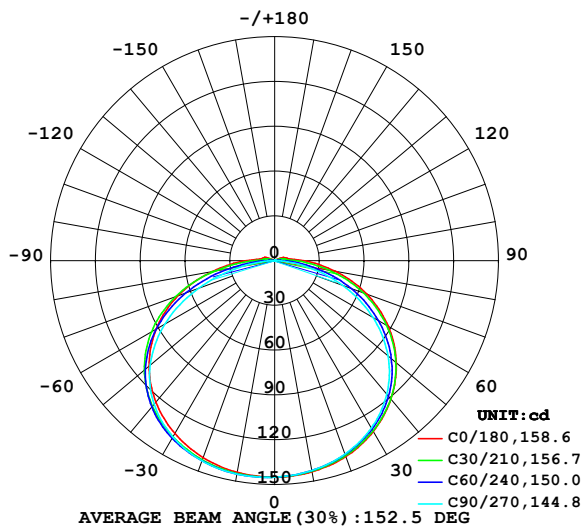

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

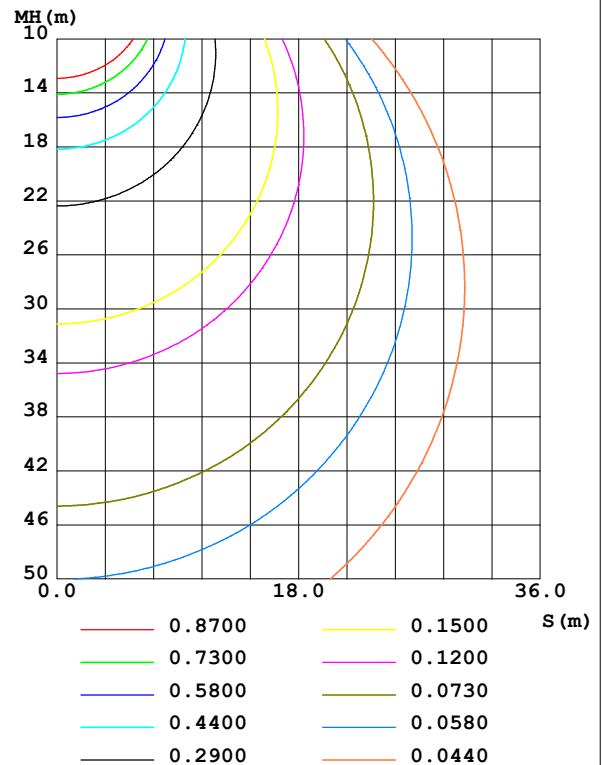

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:zhuo
 Test Date:2022-05-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity:65.0%
 Test Distance:6.070m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	143.7	143.1	142.8	143.2	144.0	145.0	145.3	144.7	0- 10	13.79	13.79	2.58,2.58
20	139.6	138.6	137.9	139.3	140.4	142.3	142.6	141.7	10- 20	40.31	54.10	10.1,10.1
30	132.2	131.1	129.5	132.8	133.6	136.9	136.4	135.6	20- 30	63.45	117.6	22,22
40	121.1	119.8	116.8	122.8	123.8	127.7	125.7	125.7	30- 40	80.81	198.4	37.1,37.1
50	106.3	104.0	99.11	107.9	109.9	113.5	108.9	110.9	40- 50	89.76	288.1	53.9,53.9
60	87.85	83.38	76.11	87.71	91.56	93.34	84.84	89.86	50- 60	87.90	376.0	70.4,70.4
70	65.70	58.82	48.45	62.57	68.88	66.92	54.20	62.66	60- 70	74.07	450.1	84.3,84.3
80	41.15	31.76	19.16	33.88	42.19	35.84	20.90	33.74	70- 80	50.02	500.1	93.6,93.6
90	19.41	9.859	0.1999	9.887	19.09	10.09	0.0530	10.90	80- 90	21.98	522.1	97.7,97.7
100	8.916	4.697	0.0875	4.629	8.689	4.550	0.0466	3.785	90-100	7.005	529.1	99,99
110	6.424	1.676	0.1166	1.482	6.692	1.731	0.0845	1.678	100-110	3.454	532.6	99.7,99.7
120	0.6433	0.1936	0.1516	0.1981	0.4036	0.2041	0.1165	0.1501	110-120	1.020	533.6	99.9,99.9
130	0.1659	0.1705	0.1894	0.1749	0.1805	0.1690	0.1544	0.1691	120-130	0.1611	533.7	99.9,99.9
140	0.1804	0.1923	0.2186	0.2128	0.2039	0.1908	0.1777	0.2084	130-140	0.1423	533.9	99.9,99.9
150	0.2096	0.2214	0.2448	0.2302	0.2329	0.2229	0.2098	0.2201	140-150	0.1352	534.0	100,100
160	0.2241	0.2447	0.2565	0.2521	0.2532	0.2389	0.2302	0.2419	150-160	0.1073	534.1	100,100
170	0.2532	0.2549	0.2565	0.2594	0.2532	0.2564	0.2536	0.2579	160-170	0.0711	534.2	100,100
180	0.2532	0.2564	0.2565	0.2594	0.2532	0.2535	0.2623	0.2638	170-180	0.0245	534.2	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

0 - 60 DEG Zonal Flux:376.01 %lum: 70.4%
0 - 60 DEG Zonal Flux:376.01 %lum: 70.4%
All measured values may vary less than 35 %
from the average measured value in the 0 to 130 deg. zone: 14.6%
All measured values in the 0 to 130 deg. zone
may vary less than 50% from the average value of itself: 21.5%


C Range: 0 - 360DEG	γ Range: 0 - 180DEG
C Interval: 30.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Temperature:25.3DEG	Humidity:65.0%
Operators:zhuo	Test Distance:6.070m [K=1.0000]
Test Date:2022-05-20	Remarks:

IES Flood Report

Photometric Filename: HCP-3456350-1M RGB.IES

LUMINANCE LIMITATION CURVES

NAME: HCP-3456350 RGB	TYPE: 2835 RGB	WEIGHT:
SPEC.:	DIM.: 1*0.01	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

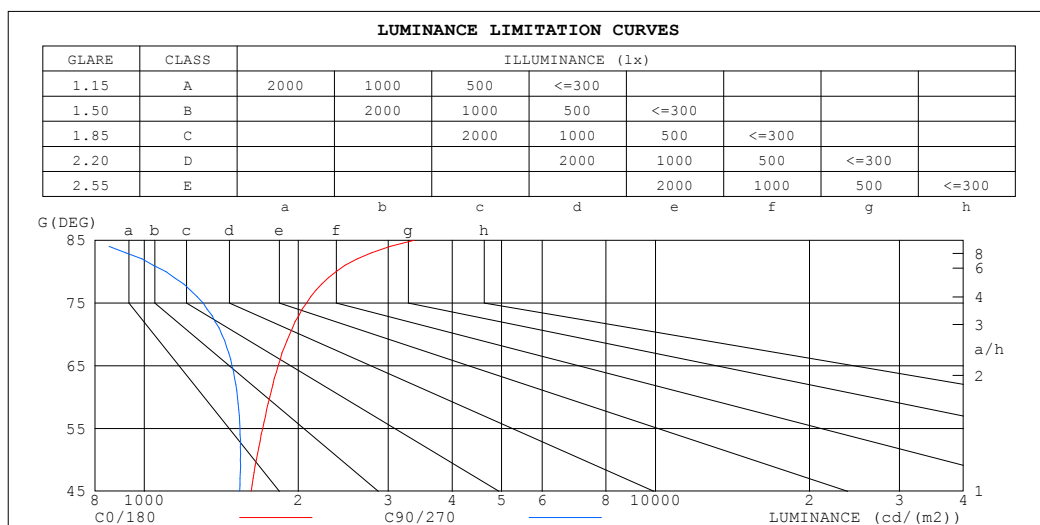

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3371	771
80	2372	1103
75	2076	1303
70	1923	1416
65	1827	1484
60	1759	1522
55	1704	1539
50	1656	1541
45	1617	1536


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: zhuo
Test Date: 2022-05-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity: 65.0%
Test Distance: 6.070m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: HCP-3456350 RGB	TYPE: 2835 RGB	WEIGHT:
SPEC.:	DIM.: 1*0.01	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

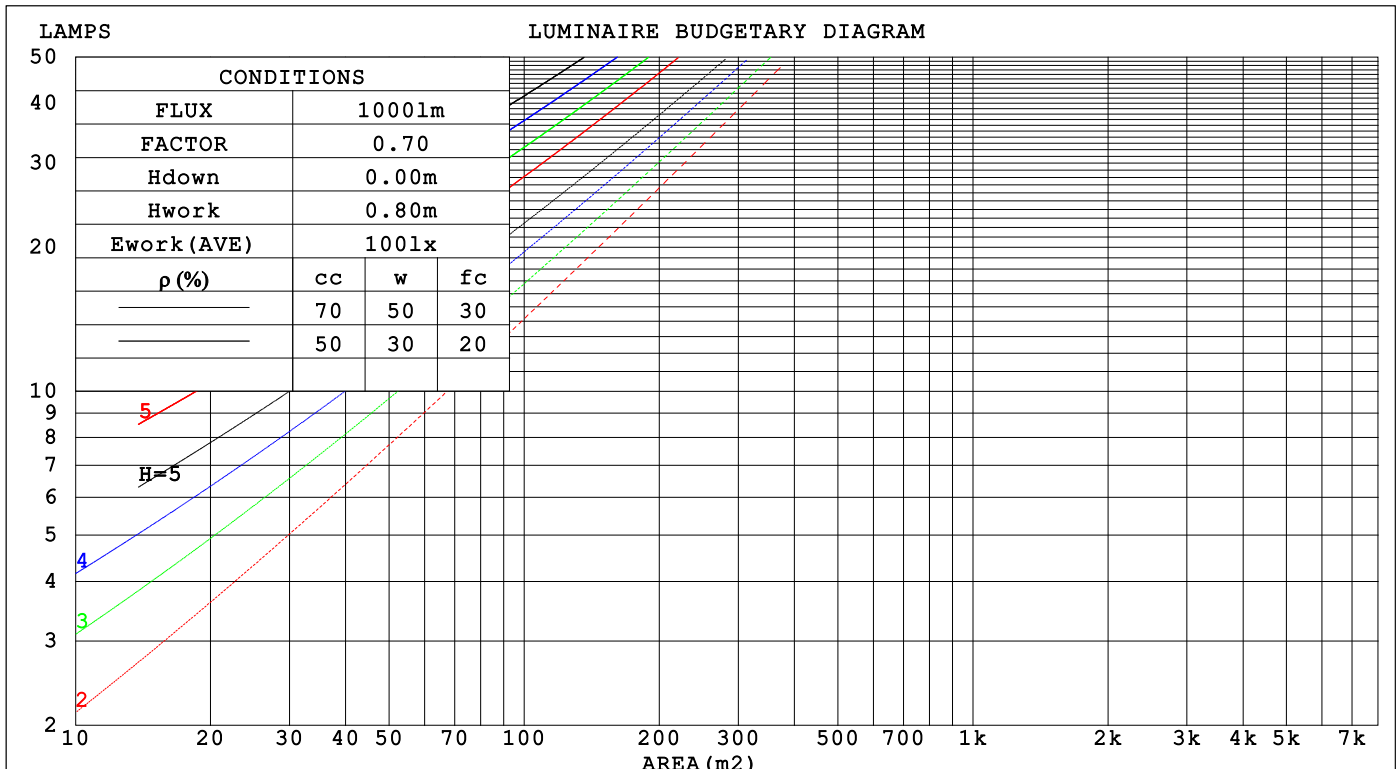

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: zhuo
Test Date: 2022-05-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity: 65.0%
Test Distance: 6.070m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: HCP-3456350 RGB	TYPE: 2835 RGB	WEIGHT:
SPEC.:	DIM.: 1*0.01	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients (WEC)														
0.0																														
1.0	.352	.200	.063	.345	.197	.062	.330	.189	.060	.316	.182	.059	.304	.176	.057															
2.0	.321	.176	.054	.314	.173	.053	.301	.167	.052	.288	.162	.051	.277	.157	.049															
3.0	.291	.155	.046	.285	.153	.046	.274	.148	.045	.263	.144	.044	.253	.140	.043															
4.0	.266	.138	.041	.260	.136	.040	.250	.132	.040	.240	.129	.039	.231	.125	.038															
5.0	.243	.124	.036	.238	.122	.036	.229	.119	.035	.220	.116	.035	.212	.113	.034															
6.0	.224	.112	.032	.220	.111	.032	.211	.108	.032	.204	.106	.031	.196	.103	.031															
7.0	.207	.103	.029	.203	.101	.029	.196	.099	.029	.189	.097	.028	.182	.095	.028															
8.0	.193	.094	.026	.189	.093	.026	.183	.091	.026	.176	.089	.026	.170	.087	.025															
9.0	.180	.087	.024	.177	.086	.024	.171	.084	.024	.165	.083	.024	.160	.081	.023															
10.0	.169	.081	.022	.166	.080	.022	.160	.079	.022	.155	.077	.022	.150	.076	.022															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.208	.208	.208	.178	.178	.178	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.201	.173	.148	.172	.149	.128	.117	.102	.088	.068	.059	.051	.022	.019	.017	
2.0	.194	.149	.112	.166	.129	.097	.114	.089	.068	.066	.052	.040	.021	.017	.013	
3.0	.186	.132	.089	.160	.114	.077	.110	.079	.054	.063	.046	.032	.020	.015	.010	
4.0	.179	.119	.074	.153	.103	.064	.105	.072	.045	.061	.042	.027	.020	.014	.009	
5.0	.171	.109	.063	.147	.094	.055	.101	.066	.039	.059	.039	.023	.019	.013	.008	
6.0	.164	.101	.055	.141	.087	.048	.097	.061	.034	.056	.036	.020	.018	.012	.007	
7.0	.157	.094	.050	.135	.081	.043	.093	.057	.031	.054	.034	.018	.017	.011	.006	
8.0	.150	.088	.046	.129	.076	.040	.089	.054	.028	.052	.032	.017	.017	.010	.006	
9.0	.143	.083	.042	.124	.072	.037	.086	.051	.026	.050	.030	.016	.016	.010	.005	
10.0	.138	.079	.040	.119	.068	.035	.082	.048	.025	.048	.028	.015	.016	.009	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:zhuo
Test Date:2022-05-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

NAME: HCP-3456350 RGB					TYPE: 2835 RGB					WEIGHT:				
SPEC.:					DIM.: 1*0.01					SERIAL No.:				
MFR.: HAVIT COMMERCIAL					SUR.:					Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3				
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3				
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2				
Room dimensions					Viewed crosswise					Viewed endwise				
x = 2H y = 2H					16.9	18.5	17.2	18.7	19.0	16.3	17.9	16.7	18.2	18.4
3H					19.0	20.5	19.3	20.7	21.0	18.0	19.5	18.3	19.7	20.0
4H					20.0	21.4	20.4	21.7	22.0	18.6	20.0	19.0	20.3	20.6
6H					21.0	22.3	21.3	22.6	22.9	19.1	20.4	19.4	20.7	21.0
8H					21.4	22.7	21.8	23.0	23.4	19.2	20.4	19.6	20.8	21.1
12H					21.9	23.1	22.3	23.5	23.8	19.2	20.4	19.6	20.8	21.1
4H 2H					17.6	19.0	17.9	19.3	19.6	17.1	18.5	17.5	18.8	19.2
3H					19.9	21.1	20.3	21.4	21.8	19.0	20.2	19.4	20.6	20.9
4H					21.0	22.2	21.4	22.5	22.9	19.8	20.9	20.2	21.3	21.7
6H					22.1	23.2	22.6	23.6	24.0	20.3	21.3	20.8	21.7	22.2
8H					22.7	23.6	23.1	24.1	24.5	20.5	21.4	21.0	21.9	22.3
12H					23.3	24.1	23.7	24.6	25.0	20.6	21.5	21.1	21.9	22.4
8H 4H					21.3	22.3	21.8	22.7	23.1	20.3	21.2	20.7	21.6	22.1
6H					22.7	23.5	23.2	23.9	24.4	21.0	21.8	21.5	22.3	22.8
8H					23.4	24.1	23.9	24.6	25.1	21.3	22.0	21.8	22.5	23.0
12H					24.1	24.8	24.7	25.3	25.8	21.5	22.1	22.0	22.6	23.1
12H 4H					21.4	22.2	21.8	22.7	23.1	20.4	21.2	20.8	21.7	22.1
6H					22.8	23.5	23.3	23.9	24.4	21.2	21.9	21.7	22.4	22.9
8H					23.5	24.2	24.1	24.6	25.2	21.6	22.2	22.1	22.7	23.2
Variations with the observer position at spacings(CIE Pub.117):														
S = 1.0H					+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H					+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H					+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 534.2 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.2)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:zhuo
Test Date:2022-05-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: HCP-3456350 RGB	TYPE: 2835 RGB	WEIGHT:
SPEC.:	DIM.: 1*0.01	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	53	41	34	52	41	33	51	40	33	27
0.80	63	51	43	62	50	42	60	49	42	35
1.00	71	59	51	70	59	51	68	60	50	43
1.25	79	67	59	77	66	59	74	65	58	50
1.50	84	73	65	82	72	64	79	70	63	55
2.00	91	81	74	89	80	73	85	78	72	63
2.50	95	86	80	93	85	79	89	82	77	67
3.00	99	91	85	97	89	84	92	86	81	72
4.00	103	97	91	101	95	90	96	91	87	77
5.00	106	100	96	103	98	94	99	94	91	81
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: zhuo
Test Date: 2022-05-20


γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity: 65.0%
Test Distance: 6.070m [K=1.0000]
Remarks:

IES Flood Report

Photometric Filename: HCP-3456350-1M RGB.IES

ISOCANDELA DIAGRAM

NAME: HCP-3456350 RGB	TYPE: 2835 RGB	WEIGHT:
SPEC.:	DIM.: 1*0.01	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

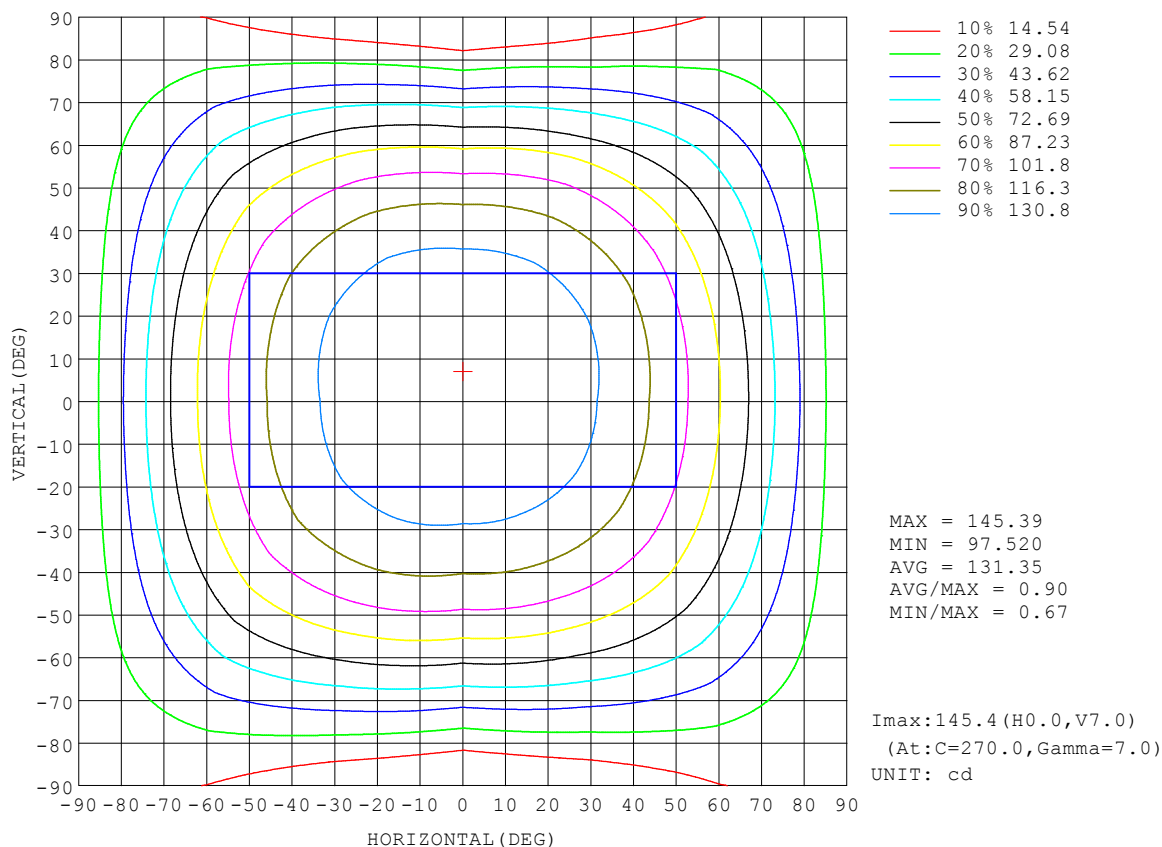


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: zhuo
Test Date: 2022-05-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity: 65.0%
Test Distance: 6.070m [K=1.0000]
Remarks:

AAI Figure

NAME: HCP-3456350 RGB	TYPE: 2835 RGB	WEIGHT:
SPEC.:	DIM.: 1*0.01	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

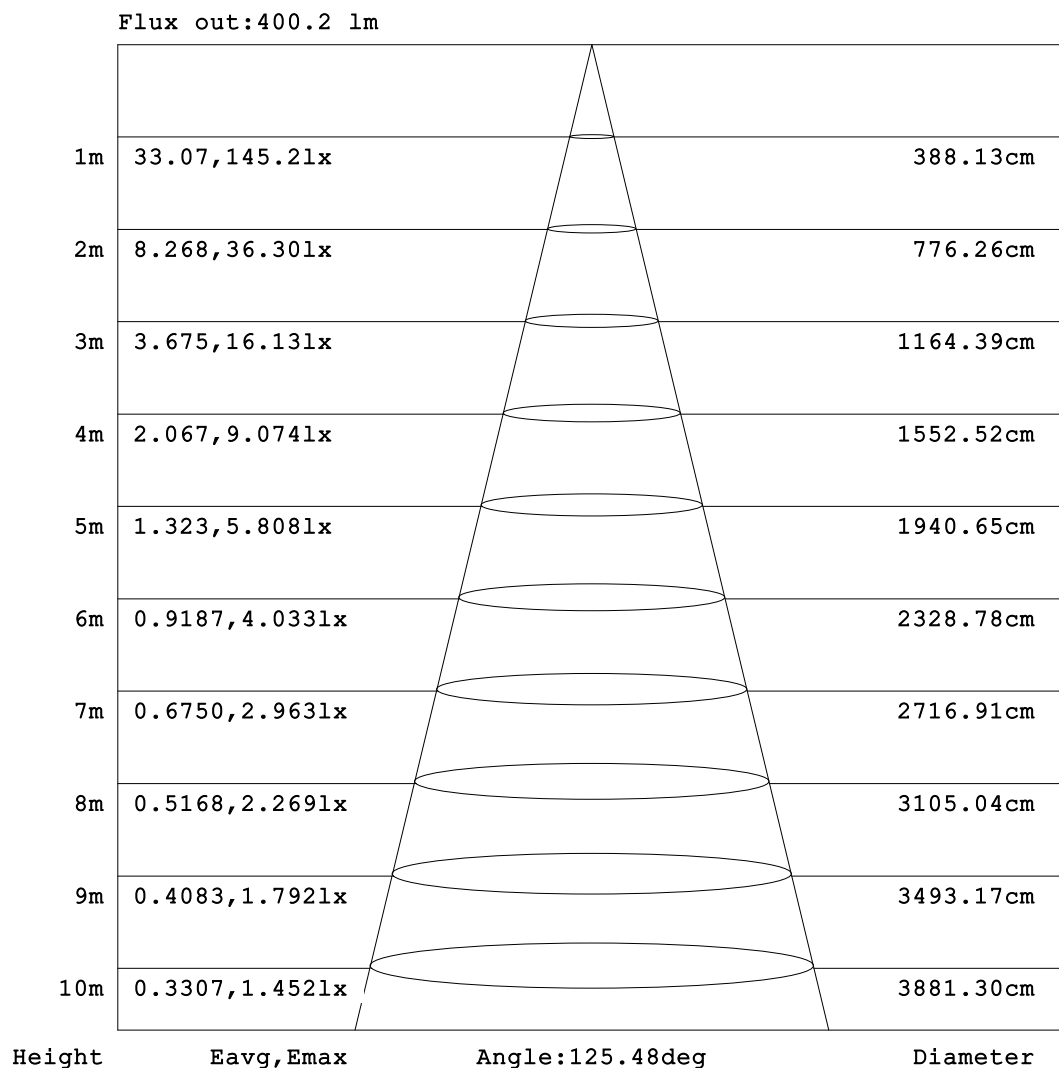


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:zhuo
Test Date:2022-05-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity:65.0%
Test Distance:6.070m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: HCP-3456350 RGB	TYPE: 2835 RGB	WEIGHT:
SPEC.:	DIM.: 1*0.01	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

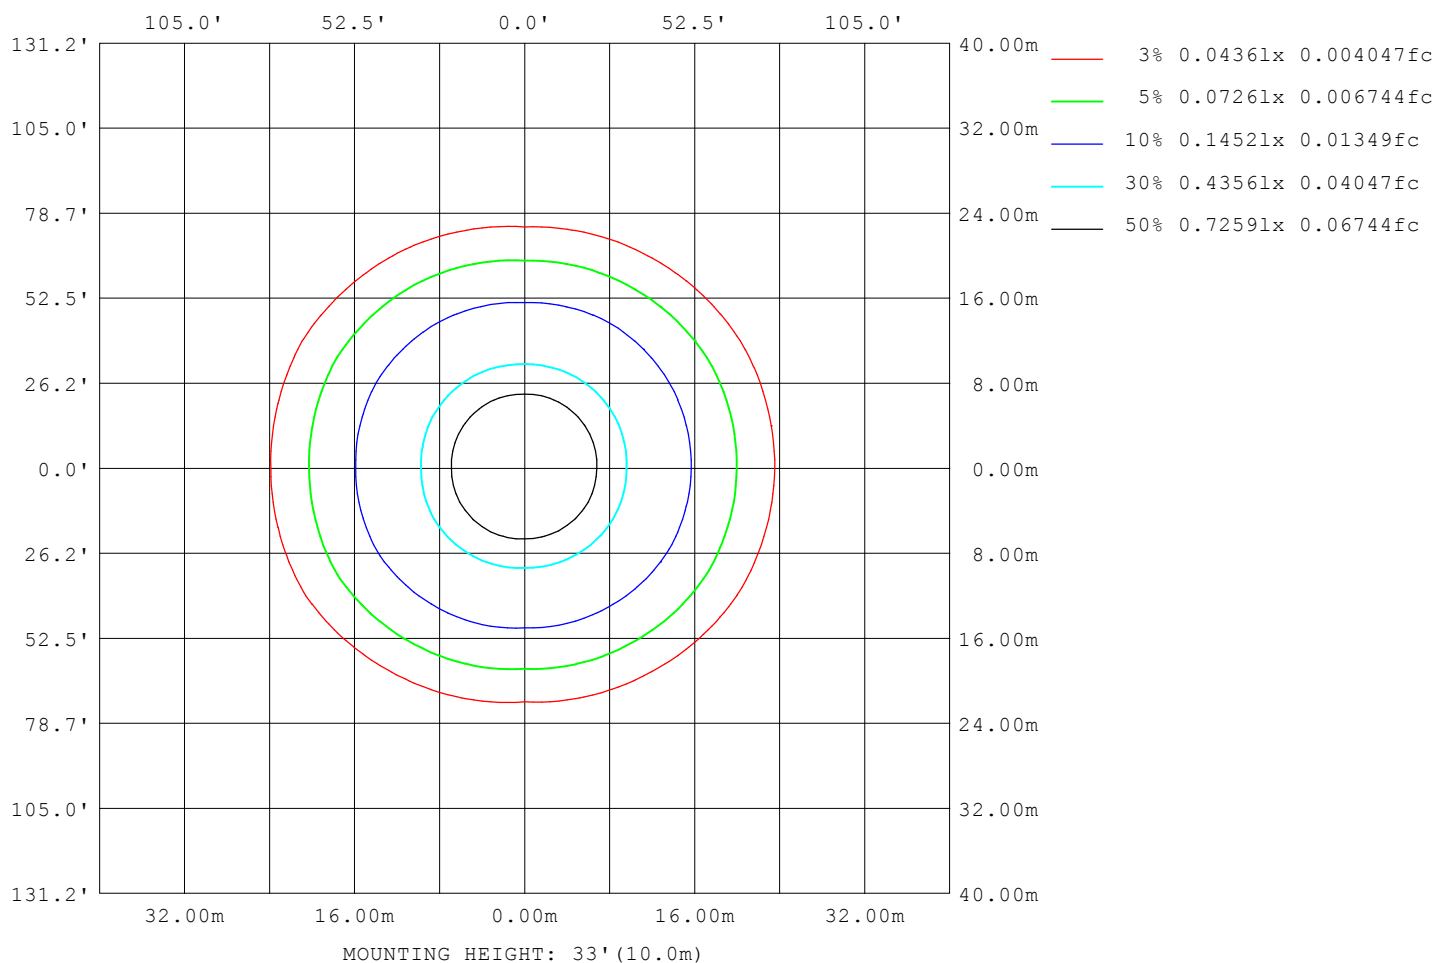

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: zhuo
 Test Date: 2022-05-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
 Humidity: 65.0%
 Test Distance: 6.070m [K=1.0000]
 Remarks:

LED Avg.L Report

NAME: HCP-3456350 RGB	TYPE: 2835 RGB	WEIGHT:
SPEC.:	DIM.: 1*0.01	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1868
L_0~180 (75) av	2120
L_0~180 (85) av	3394
L_90~270 (65) av	1573
L_90~270 (75) av	1375
L_90~270 (85) av	783
L_45 (65) av	1808
L_45 (75) av	1898
L_45 (85) av	2350

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: zhuo
Test Date: 2022-05-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity: 65.0%
Test Distance: 6.070m [K=1.0000]
Remarks:

Planar Illuminance Curve

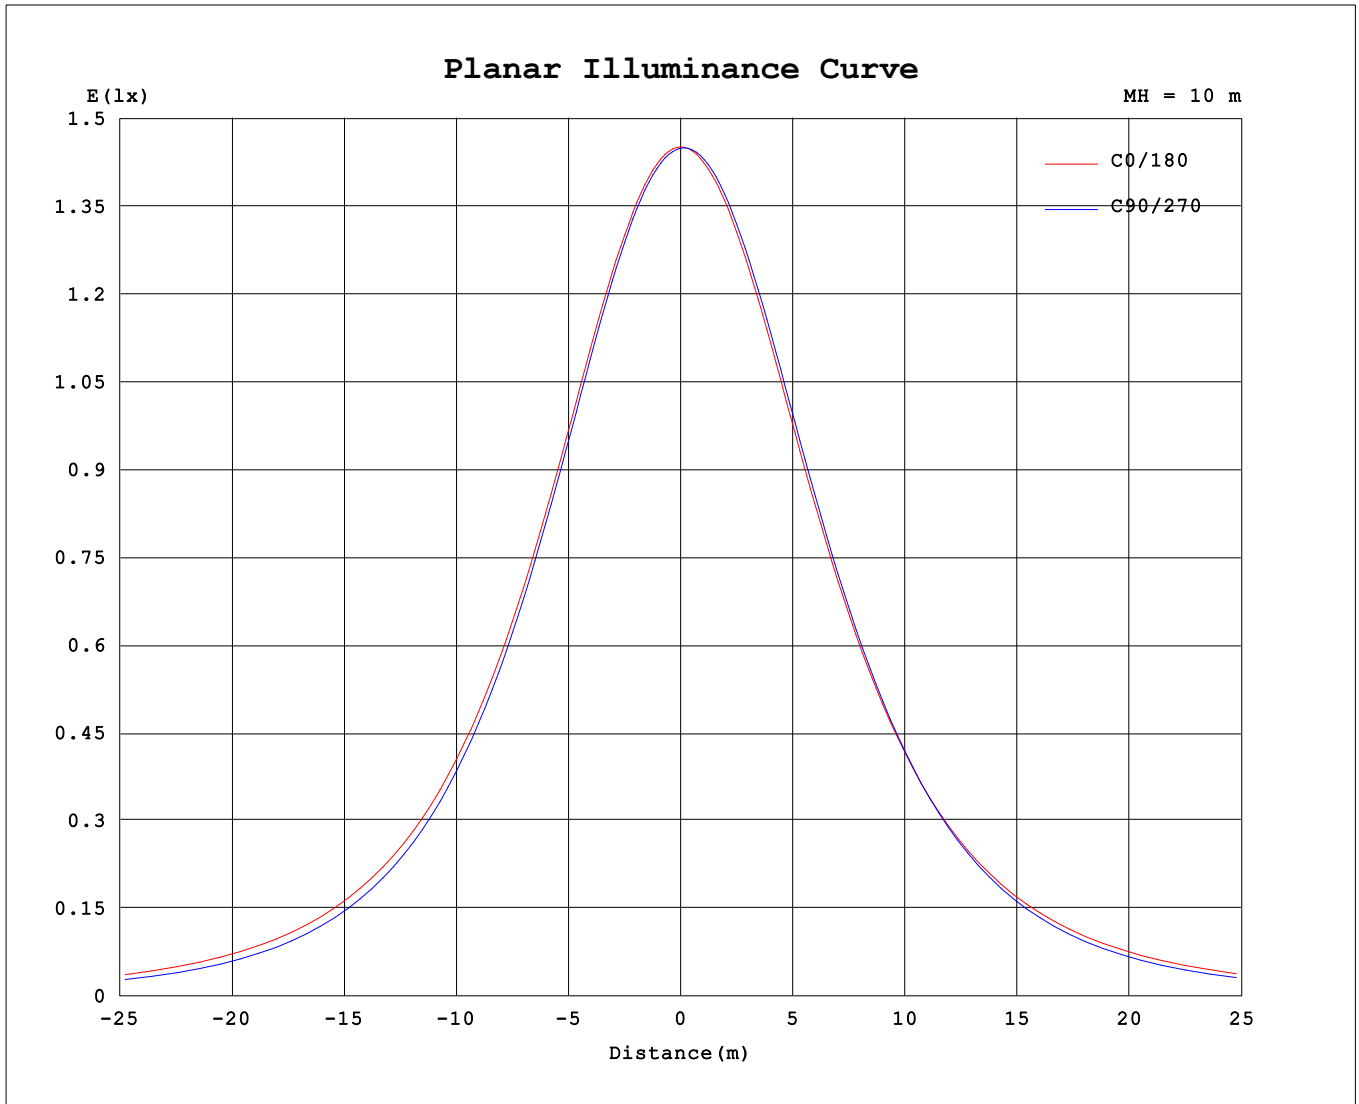

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: zhuo
Test Date: 2022-05-20

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity: 65.0%
Test Distance: 6.070m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: HCP-3456350 RGB	TYPE: 2835 RGB	WEIGHT:
SPEC.:	DIM.: 1*0.01	SERIAL No.:
MFR.: HAVIT COMMERCIAL	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	145	145	145	145	145	145	145	145	145	145	145	145							
5	145	144	144	144	144	144	145	145	145	145	145	145							
10	144	143	143	143	143	143	144	145	145	145	145	144							
15	142	141	141	141	141	142	143	144	144	144	144	143							
20	140	139	138	138	139	140	140	142	143	143	142	141							
25	136	136	135	134	136	137	137	139	140	140	140	138							
30	132	132	130	130	132	134	134	136	137	136	136	135							
35	127	127	125	124	127	129	129	132	133	132	132	130							
40	121	121	119	117	121	124	124	127	128	126	126	125							
45	114	114	111	109	114	118	117	121	121	118	120	118							
50	106	106	102	99.1	105	111	110	114	113	109	111	111							
55	97.6	96.9	91.8	88.3	94.9	102	101	105	103	97.7	101	101							
60	87.8	86.5	80.3	76.1	83.4	92.0	91.6	95.2	91.5	84.8	89.6	90.1							
65	77.1	75.3	67.7	62.7	70.7	80.7	80.8	83.6	78.1	70.2	73.7	78.1							
70	65.7	63.2	54.4	48.4	57.0	68.1	68.9	70.6	63.2	54.2	59.7	65.6							
75	53.7	50.4	40.5	33.7	42.7	54.5	56.0	56.4	47.2	37.5	44.7	53.1							
80	41.1	36.9	26.6	19.2	28.1	39.6	42.2	40.8	30.9	20.9	28.3	39.2							
85	29.4	24.1	14.0	6.72	14.7	25.2	29.8	26.0	15.9	6.93	15.9	26.1							
90	19.4	14.2	5.52	0.20	5.41	14.4	19.1	14.3	5.88	0.05	6.27	15.5							
95	12.1	8.46	3.86	0.07	3.64	8.50	11.3	8.22	3.75	0.04	3.12	8.70							
100	8.92	7.20	2.19	0.09	1.72	7.54	8.69	7.34	1.76	0.05	2.06	5.51							
105	7.41	5.79	0.46	0.10	0.27	5.36	7.52	5.38	0.29	0.07	0.30	5.32							
110	6.42	3.22	0.13	0.12	0.17	2.80	6.69	3.34	0.12	0.08	0.11	3.24							
115	3.56	1.00	0.12	0.14	0.13	0.62	3.22	0.75	0.12	0.11	0.13	0.91							
120	0.64	0.27	0.12	0.15	0.13	0.27	0.40	0.27	0.14	0.12	0.15	0.15							
125	0.23	0.17	0.13	0.17	0.15	0.20	0.21	0.17	0.16	0.13	0.16	0.16							
130	0.17	0.18	0.16	0.19	0.16	0.19	0.18	0.16	0.17	0.15	0.18	0.16							
135	0.17	0.20	0.17	0.20	0.18	0.20	0.19	0.16	0.19	0.16	0.19	0.17							
140	0.18	0.21	0.18	0.22	0.21	0.22	0.20	0.17	0.21	0.18	0.21	0.21							
145	0.21	0.22	0.21	0.23	0.21	0.23	0.22	0.21	0.22	0.21	0.22	0.21							
150	0.21	0.23	0.21	0.24	0.22	0.24	0.23	0.21	0.24	0.21	0.23	0.21							
155	0.21	0.24	0.22	0.26	0.22	0.26	0.24	0.21	0.24	0.22	0.25	0.22							
160	0.22	0.26	0.23	0.26	0.24	0.26	0.25	0.22	0.26	0.23	0.26	0.23							
165	0.25	0.26	0.25	0.26	0.25	0.26	0.26	0.24	0.26	0.25	0.27	0.25							
170	0.25	0.26	0.25	0.26	0.26	0.26	0.25	0.25	0.26	0.25	0.27	0.25							
175	0.25	0.26	0.25	0.26	0.26	0.26	0.25	0.25	0.26	0.25	0.27	0.26							
180	0.25	0.26	0.25	0.26	0.26	0.26	0.25	0.25	0.25	0.26	0.27	0.26							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: zhao
Test Date: 2022-05-20

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.00.454
Humidity: 65.0%
Test Distance: 6.070m [K=1.0000]
Remarks: