
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.3056A P:7.334W PF:1.000 Freq:0Hz Lamp Flux:464.481x1 lm		
NAME: HCP-36606062	TYPE:	WEIGHT:
SPEC.:HCP-36606062	DIM.: 1000*06*06mm	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*06	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA Eff: 63.33 lm/W			
MODEL	NMT0606	Imax(cd)	156.7	S/MH(C0/180)	1.27
NOMINAL POWER(W)	7.2	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	464.48	h UP,DN(C0-180)	1.2,49.5
NOMINAL FLUX(lm)	464.481	CIE CLASS	DIRECT	h UP,DN(C180-360)	1.0,48.2
LAMPS INSIDE	1	h up(%)	2.3	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	h down(%)	97.7	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

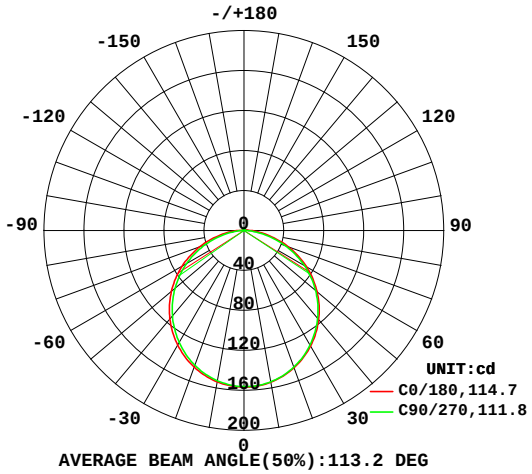

AVERAGE BEAM ANGLE(50%):113.2 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

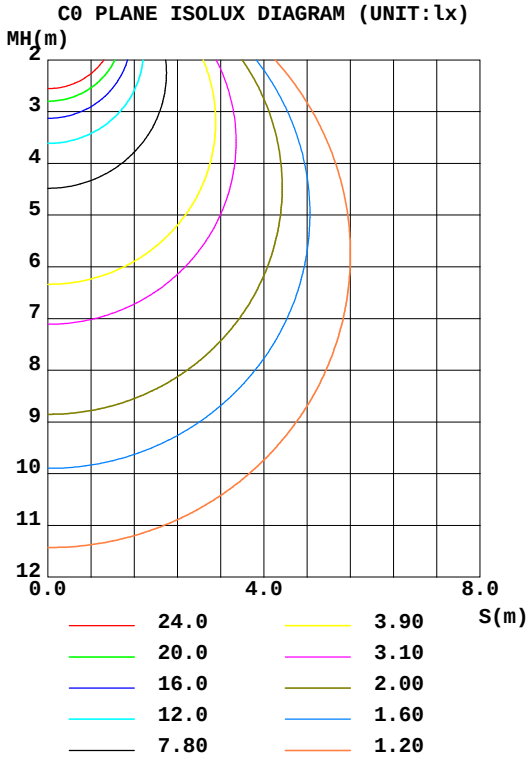

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2021-02-01

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	154.2	154.3	153.7	153.7	153.8	153.1	152.7	153.0	0- 10	14.79	14.79	3.19,3.19
20	146.3	146.6	145.6	145.8	145.6	144.2	143.6	144.3	10- 20	42.35	57.14	12.3,12.3
30	133.5	133.7	132.3	132.8	132.6	130.5	129.6	130.8	20- 30	64.14	121.3	26.1,26.1
40	116.3	116.5	114.7	115.5	115.5	112.8	111.5	113.1	30- 40	77.38	198.7	42.8,42.8
50	95.68	95.58	93.58	94.79	94.85	91.78	90.19	91.99	40- 50	80.52	279.2	60.1,60.1
60	72.11	71.92	69.51	71.30	71.61	68.34	66.49	68.41	50- 60	73.32	352.5	75.9,75.9
70	46.61	46.10	43.43	45.82	46.53	43.31	41.03	43.17	60- 70	56.74	409.2	88.1,88.1
80	21.97	20.70	17.28	20.47	21.87	18.86	15.93	18.67	70- 80	33.46	442.7	95.3,95.3
90	6.871	4.907	0.8622	4.106	5.779	3.531	0.5704	4.030	80- 90	11.21	453.9	97.7,97.7
100	3.782	2.331	0.4943	1.435	2.117	1.264	0.3484	1.670	90-100	2.580	456.5	98.3,98.3
110	2.587	1.182	0.7064	0.9887	1.494	0.8750	0.7287	1.130	100-110	1.505	458.0	98.6,98.6
120	1.737	1.263	1.069	1.230	1.296	1.047	1.022	1.167	110-120	1.165	459.2	98.9,98.9
130	1.677	1.550	1.369	1.517	1.563	1.302	1.263	1.362	120-130	1.195	460.4	99.1,99.1
140	1.904	1.764	1.623	1.757	1.830	1.603	1.456	1.542	130-140	1.215	461.6	99.4,99.4
150	2.083	1.897	1.810	2.004	2.017	1.890	1.670	1.609	140-150	1.118	462.7	99.6,99.6
160	2.297	2.024	2.103	2.258	2.205	2.211	2.071	1.810	150-160	0.9184	463.6	99.8,99.8
170	2.412	2.352	2.451	2.498	2.218	2.431	2.478	2.297	160-170	0.6351	464.2	99.9,99.9
180	2.344	2.719	2.779	2.779	2.344	2.692	2.765	2.772	170-180	0.2354	464.5	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2021-02-01


g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.3056A P:7.334W PF:1.000 Freq:0Hz Lamp Flux:464.481x1 lm		
NAME: HCP-36606062	TYPE:	WEIGHT:
SPEC.:HCP-36606062	DIM.: 1000*06*06mm	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*06	Shielding Angle:

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

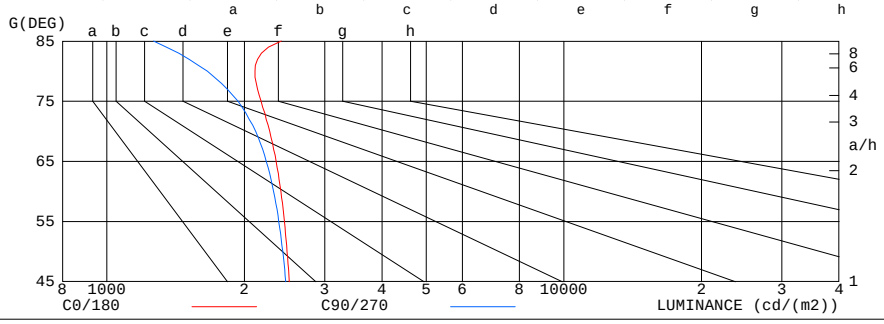

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	2408	1266
80	2109	1658
75	2176	1936
70	2271	2117
65	2347	2234
60	2404	2317
55	2447	2379
50	2481	2426
45	2509	2465


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2021-02-01

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.3056A P:7.334W PF:1.000 Freq:0Hz Lamp Flux:464.481x1 lm		
NAME: HCP-36606062	TYPE:	WEIGHT:
SPEC.:HCP-36606062	DIM.: 1000*06*06mm	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*06	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.15	1.15	1.15	1.10	1.10	1.10	1.05	1.05	1.05	.00	.00	.00	.98
1.0	1.03	.99	.95	1.00	.96	.93	.96	.92	.89	.91	.89	.86	.87	.85	.83	.81
2.0	.89	.83	.77	.87	.81	.76	.83	.78	.73	.80	.75	.71	.76	.73	.70	.67
3.0	.78	.70	.64	.77	.69	.63	.73	.67	.61	.70	.65	.60	.67	.63	.59	.56
4.0	.69	.60	.54	.68	.60	.53	.65	.58	.52	.62	.56	.51	.60	.55	.50	.48
5.0	.62	.53	.46	.61	.52	.46	.58	.51	.45	.56	.49	.44	.54	.48	.44	.41
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.39	.51	.44	.39	.49	.43	.38	.36
7.0	.50	.42	.35	.50	.41	.35	.48	.40	.35	.46	.39	.34	.45	.39	.34	.32
8.0	.46	.37	.32	.45	.37	.31	.44	.36	.31	.42	.36	.31	.41	.35	.30	.28
9.0	.42	.34	.28	.42	.34	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

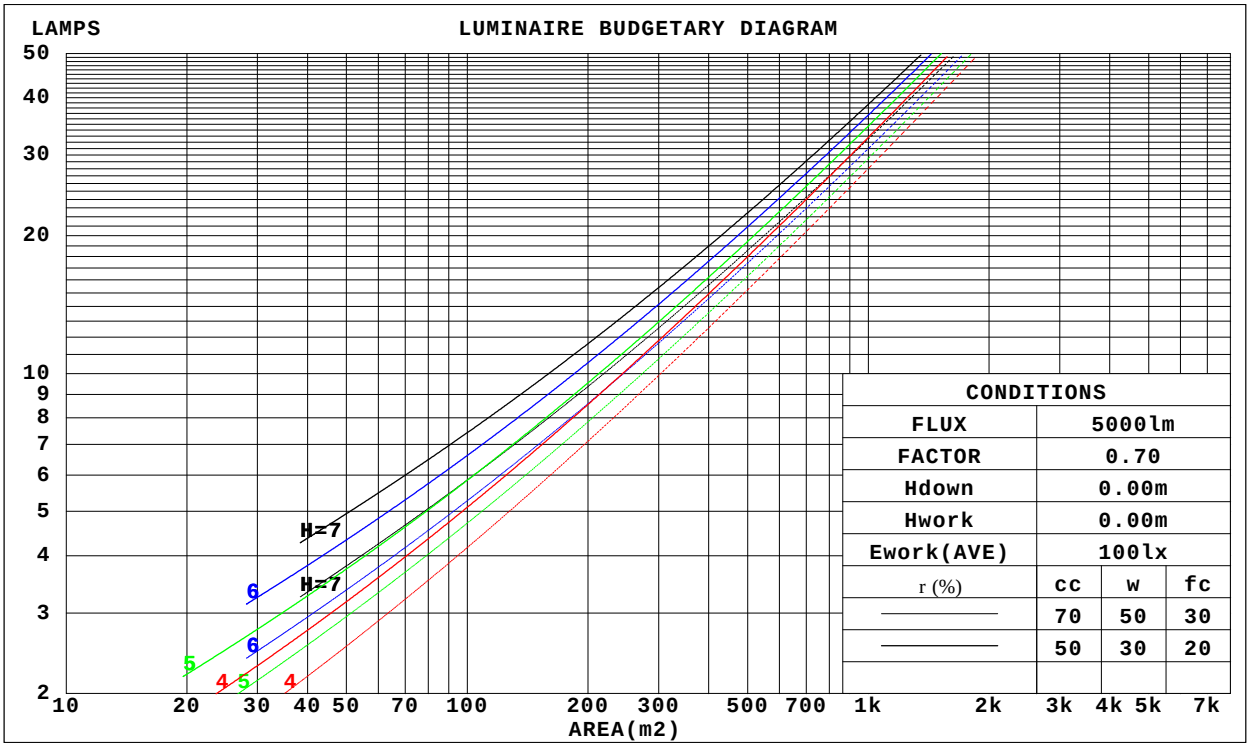

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2021-02-01

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:24.00V I:0.3056A P:7.334W PF:1.000 Freq:0Hz Lamp Flux:464.481x1 lm		
NAME: HCP-36606062	TYPE:	WEIGHT:
SPEC.:HCP-36606062	DIM.: 1000*06*06mm	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*06	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.317	.180	.057	.309	.176	.056	.295	.169	.054	.281	.162	.052	.269	.156	.050	
2.0	.296	.162	.050	.289	.159	.049	.276	.153	.048	.264	.148	.046	.253	.143	.045	
3.0	.272	.145	.043	.266	.143	.043	.255	.138	.042	.244	.134	.041	.234	.130	.040	
4.0	.251	.130	.038	.245	.128	.038	.235	.125	.037	.226	.121	.037	.217	.118	.036	
5.0	.231	.118	.034	.227	.116	.034	.217	.113	.033	.209	.110	.033	.201	.107	.032	
6.0	.214	.107	.031	.210	.106	.031	.202	.103	.030	.194	.101	.030	.187	.098	.029	
7.0	.199	.099	.028	.195	.097	.028	.188	.095	.027	.181	.093	.027	.175	.091	.027	
8.0	.186	.091	.026	.183	.090	.025	.176	.088	.025	.170	.086	.025	.164	.084	.025	
9.0	.174	.084	.024	.171	.083	.023	.165	.082	.023	.159	.080	.023	.154	.078	.023	
10.0	.164	.079	.022	.161	.078	.022	.155	.076	.021	.150	.075	.021	.146	.073	.021	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.208	.208	.208	.178	.178	.178	.121	.121	.121	.070	.070	.070	.022	.022	.022	
1.0	.198	.174	.151	.170	.149	.130	.116	.102	.090	.067	.059	.052	.021	.019	.017	
2.0	.190	.149	.115	.163	.129	.100	.112	.089	.069	.064	.052	.041	.021	.017	.013	
3.0	.183	.132	.092	.157	.114	.079	.107	.079	.056	.062	.046	.033	.020	.015	.011	
4.0	.175	.119	.076	.150	.103	.066	.103	.072	.046	.060	.042	.027	.019	.014	.009	
5.0	.168	.108	.065	.144	.094	.056	.099	.066	.040	.057	.038	.024	.019	.013	.008	
6.0	.160	.100	.057	.138	.087	.050	.095	.061	.035	.055	.036	.021	.018	.012	.007	
7.0	.154	.093	.051	.132	.081	.044	.091	.057	.032	.053	.033	.019	.017	.011	.006	
8.0	.147	.088	.047	.127	.076	.041	.088	.053	.029	.051	.031	.017	.016	.010	.006	
9.0	.141	.083	.043	.121	.072	.038	.084	.050	.027	.049	.030	.016	.016	.010	.005	
10.0	.135	.078	.040	.117	.068	.035	.081	.048	.025	.047	.028	.015	.015	.009	.005	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2021-02-01

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.3056A P:7.334W PF:1.000 Freq:0Hz Lamp Flux:464.481x1 lm		
NAME: HCP-36606062	TYPE:	WEIGHT:
SPEC.:HCP-36606062	DIM.: 1000*06*06mm	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*06	Shielding Angle:

ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	18.6	20.1	18.9	20.4	20.6	18.5	20.0	18.8	20.2	20.5
	3H	20.2	21.6	20.6	21.9	22.2	20.0	21.4	20.4	21.7	22.0
	4H	20.9	22.2	21.2	22.5	22.8	20.6	21.9	21.0	22.2	22.5
	6H	21.4	22.7	21.8	23.0	23.3	21.0	22.3	21.4	22.6	22.9
	8H	21.6	22.8	22.0	23.2	23.5	21.1	22.3	21.5	22.6	23.0
	12H	21.8	23.0	22.2	23.3	23.7	21.2	22.3	21.6	22.7	23.0
4H	2H	19.2	20.6	19.6	20.8	21.2	19.1	20.5	19.5	20.7	21.1
	3H	21.0	22.2	21.4	22.5	22.9	20.9	22.0	21.2	22.3	22.7
	4H	21.8	22.9	22.2	23.2	23.6	21.6	22.6	22.0	23.0	23.4
	6H	22.5	23.4	22.9	23.8	24.2	22.1	23.0	22.5	23.4	23.8
	8H	22.8	23.6	23.2	24.0	24.5	22.3	23.1	22.7	23.5	24.0
	12H	23.0	23.8	23.5	24.2	24.7	22.4	23.2	22.8	23.6	24.0
8H	4H	22.1	23.0	22.6	23.4	23.8	21.9	22.8	22.3	23.2	23.6
	6H	22.9	23.7	23.4	24.1	24.6	22.6	23.3	23.0	23.7	24.2
	8H	23.3	23.9	23.8	24.4	24.9	22.8	23.5	23.3	23.9	24.4
	12H	23.7	24.2	24.2	24.7	25.2	23.0	23.5	23.5	24.0	24.6
12H	4H	22.1	22.9	22.6	23.3	23.8	21.9	22.7	22.4	23.1	23.6
	6H	23.0	23.6	23.5	24.1	24.6	22.6	23.3	23.1	23.8	24.3
	8H	23.4	24.0	23.9	24.5	25.0	22.9	23.5	23.5	24.0	24.5
Variations with the observer position at spacings:											
S = 1.0H		+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.1 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 464.5 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -2.7)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2021-02-01

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.3056A P:7.334W PF:1.000 Freq:0Hz Lamp Flux:464.481x1 lm		
NAME: HCP-36606062	TYPE:	WEIGHT:
SPEC.:HCP-36606062	DIM.: 1000*06*06mm	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*06	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	56	45	38	56	44	38	54	44	37	31
0.80	66	55	47	65	54	47	63	53	46	39
1.00	75	63	56	73	63	56	71	64	55	48
1.25	82	71	64	80	70	63	77	69	62	55
1.50	87	77	70	85	76	69	82	74	68	60
2.00	94	85	78	92	84	77	88	81	76	67
2.50	98	90	83	95	88	82	91	85	80	71
3.00	101	94	88	99	92	87	94	89	85	76
4.00	105	99	94	103	97	93	98	94	90	80
5.00	108	103	98	105	101	97	100	97	93	83
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2021-02-01

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.3056A P:7.334W PF:1.000 Freq:0Hz Lamp Flux:464.481x1 lm		
NAME: HCP-36606062	TYPE:	WEIGHT:
SPEC.:HCP-36606062	DIM.: 1000*06*06mm	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*06	Shielding Angle:

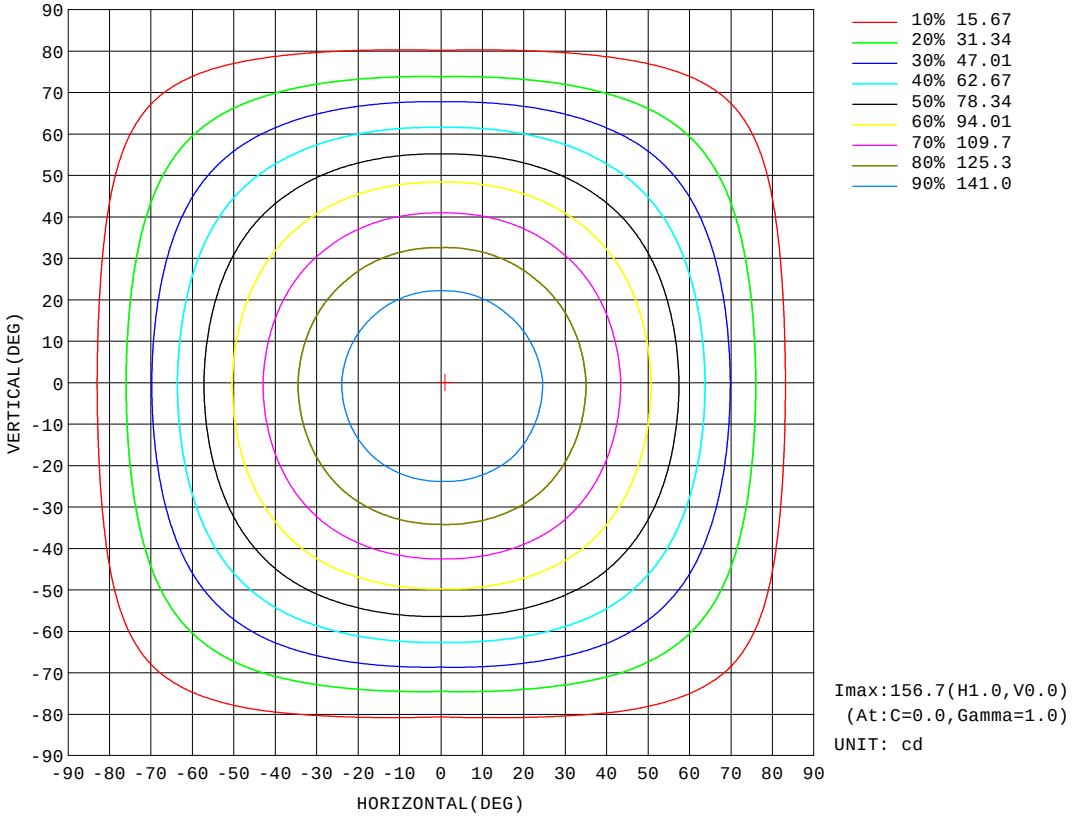


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2021-02-01

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.3056A P:7.334W PF:1.000 Freq:0Hz Lamp Flux:464.481x1 lm		
NAME: HCP-36606062	TYPE:	WEIGHT:
SPEC.:HCP-36606062	DIM.: 1000*06*06mm	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*06	Shielding Angle:

Flux out:324.7 lm

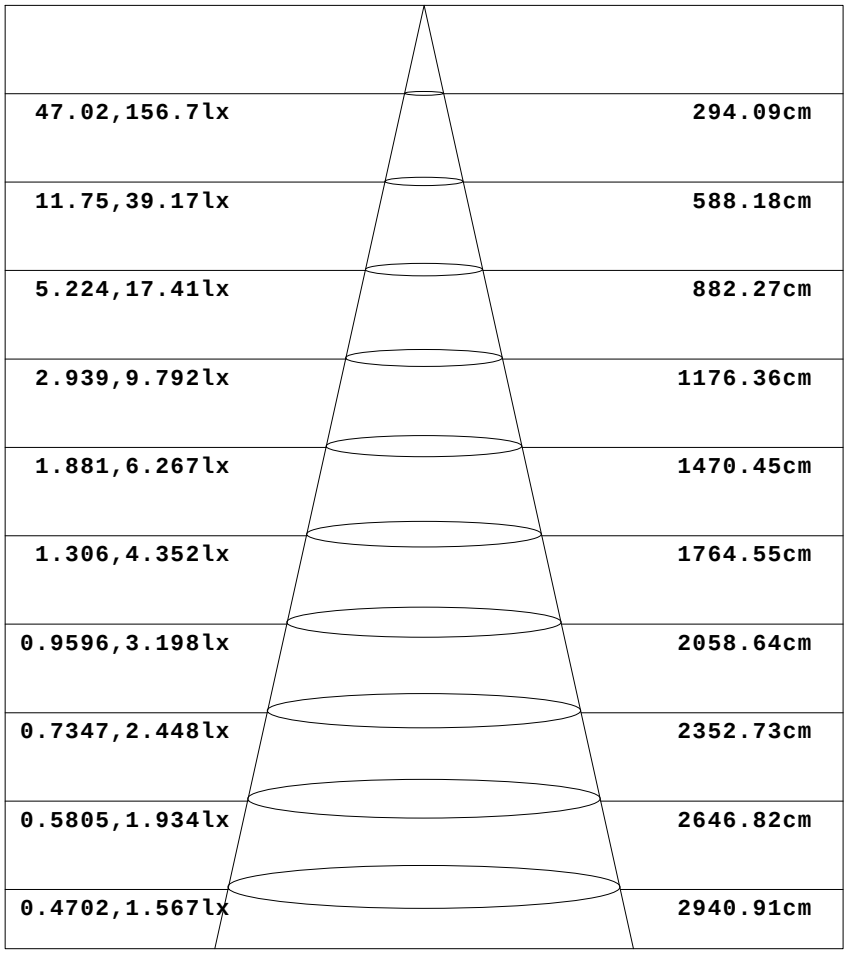


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2021-02-01

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.3056A P:7.334W PF:1.000 Freq:0Hz Lamp Flux:464.481x1 lm		
NAME: HCP-36606062	TYPE:	WEIGHT:
SPEC.:HCP-36606062	DIM.: 1000*06*06mm	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*06	Shielding Angle:

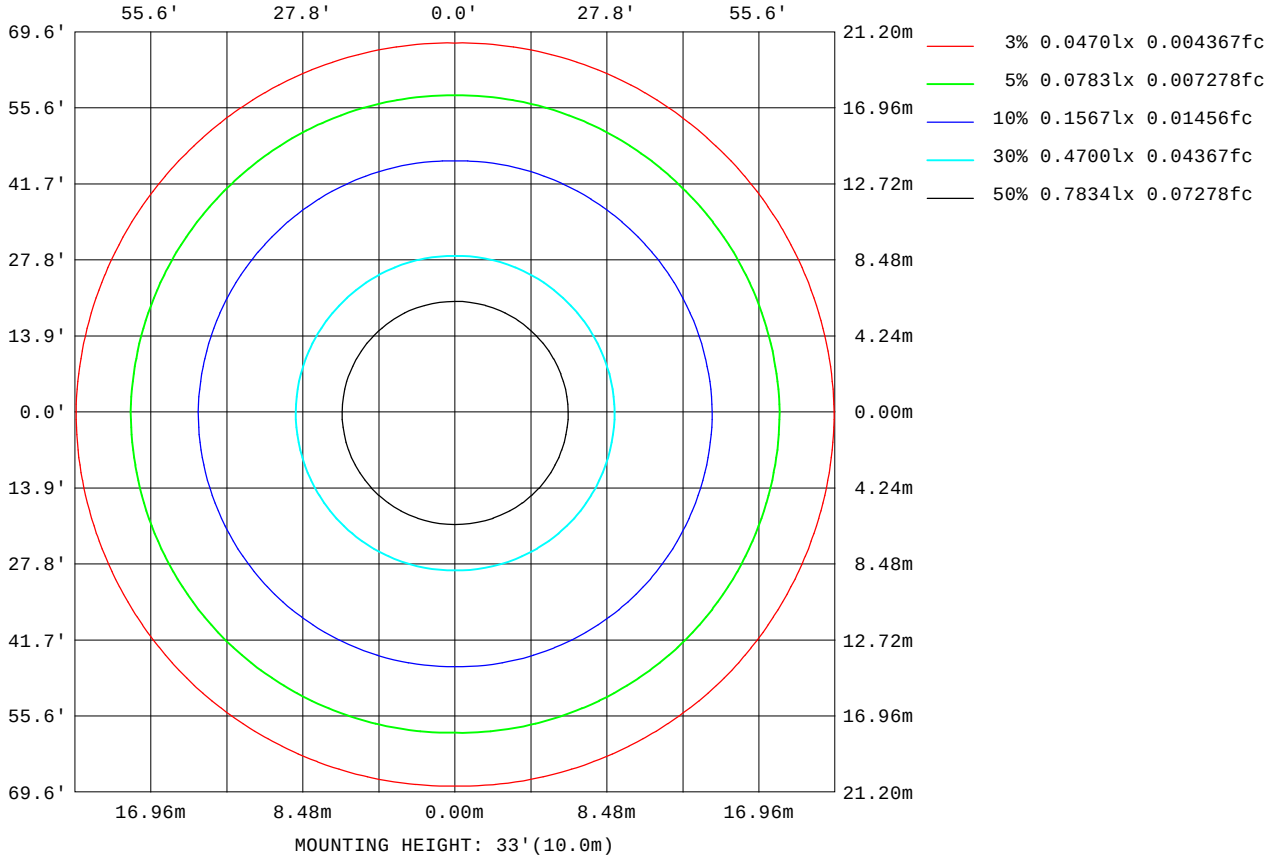

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2021-02-01

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:24.00V I:0.3056A P:7.334W PF:1.000 Freq:0Hz Lamp Flux:464.481x1 lm		
NAME: HCP-36606062	TYPE:	WEIGHT:
SPEC.:HCP-36606062	DIM.: 1000*06*06mm	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*06	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2341
L_0~180(75)av	2178
L_0~180(85)av	2356
L_90~270(65)av	2180
L_90~270(75)av	1874
L_90~270(85)av	1211
L_45(65)av	2265
L_45(75)av	2045
L_45(85)av	1881

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2021-02-01

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

Planar Illuminance Curve

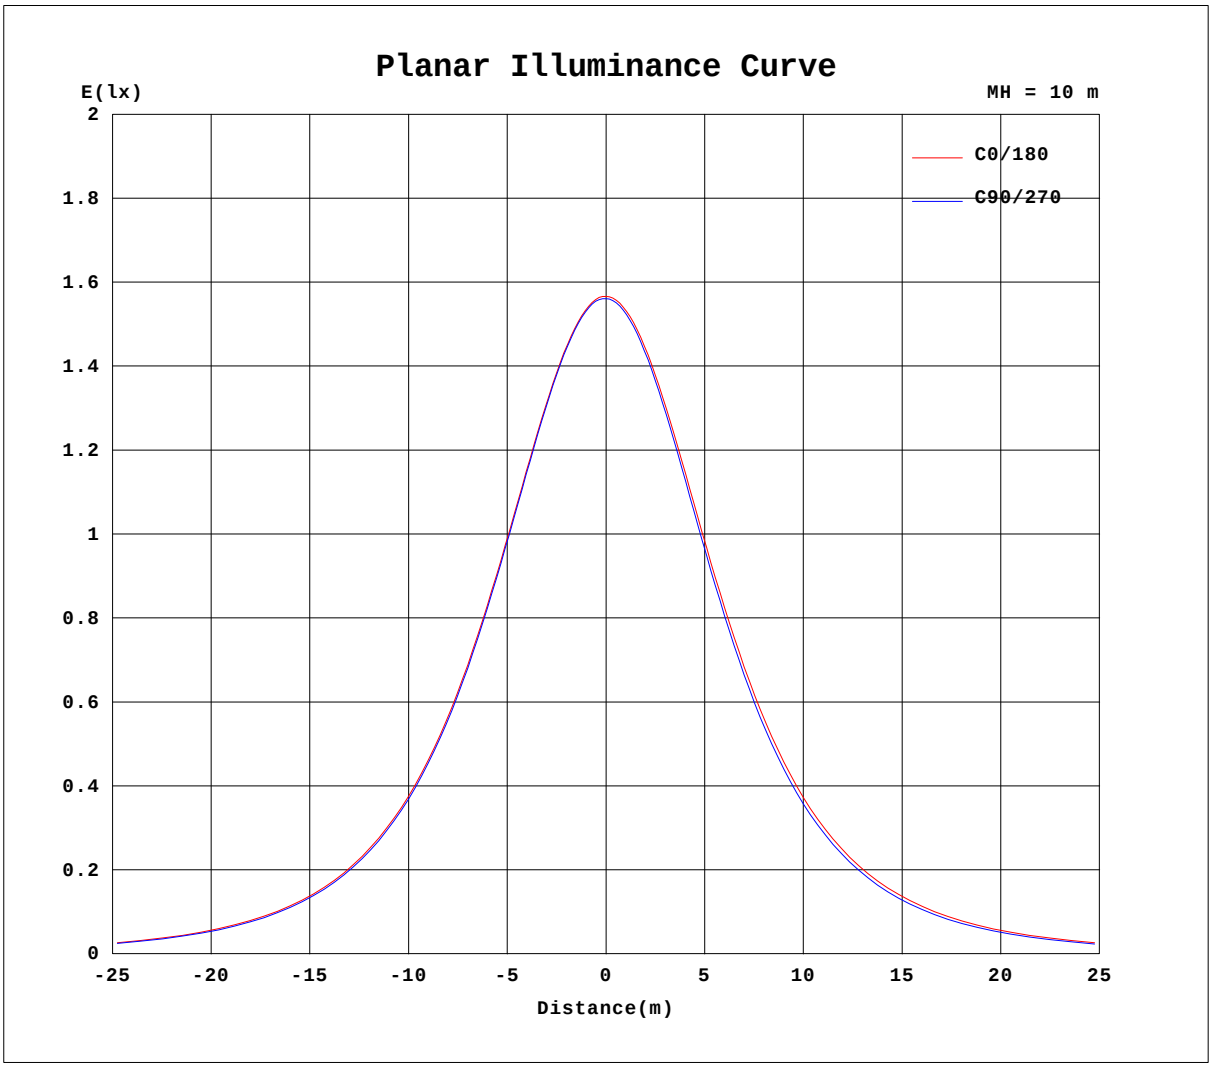

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2021-02-01

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.3056A P:7.334W PF:1.000 Freq:0Hz Lamp Flux:464.481x1 lm		
NAME: HCP-36606062	TYPE:	WEIGHT:
SPEC.:HCP-36606062	DIM.: 1000*06*06mm	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*06	Shielding Angle:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	45	90	135	180	225	270	315											
0	157	157	156	156	157	157	156	156											
5	156	156	156	156	156	156	155	155											
10	154	154	154	154	154	153	153	153											
15	151	151	150	150	150	149	149	149											
20	146	147	146	146	146	144	144	144											
25	140	141	140	140	140	138	137	138											
30	134	134	132	133	133	130	130	131											
35	125	126	124	125	125	122	121	122											
40	116	116	115	116	116	113	111	113											
45	106	106	105	106	106	103	101	103											
50	95.7	95.6	93.6	94.8	94.9	91.8	90.2	92.0											
55	84.2	84.1	81.9	83.3	83.5	80.3	78.6	80.5											
60	72.1	71.9	69.5	71.3	71.6	68.3	66.5	68.4											
65	59.5	59.2	56.6	58.7	59.2	55.9	53.9	55.9											
70	46.6	46.1	43.4	45.8	46.5	43.3	41.0	43.2											
75	33.8	33.0	30.1	32.8	33.9	30.7	28.1	30.5											
80	22.0	20.7	17.3	20.5	21.9	18.9	15.9	18.7											
85	12.6	10.7	6.62	10.2	12.0	9.19	6.05	9.28											
90	6.87	4.91	0.86	4.11	5.78	3.53	0.57	4.03											
95	4.55	2.94	0.53	1.97	3.01	1.65	0.18	2.57											
100	3.78	2.33	0.49	1.43	2.12	1.26	0.35	1.67											
105	3.27	1.68	0.53	1.08	1.84	0.98	0.55	1.39											
110	2.59	1.18	0.71	0.99	1.49	0.88	0.73	1.13											
115	1.96	1.16	0.89	1.08	1.28	0.88	0.89	1.08											
120	1.74	1.26	1.07	1.23	1.30	1.05	1.02	1.17											
125	1.63	1.41	1.24	1.38	1.41	1.15	1.14	1.25											
130	1.68	1.55	1.37	1.52	1.56	1.30	1.26	1.36											
135	1.80	1.68	1.51	1.63	1.71	1.46	1.37	1.46											
140	1.90	1.76	1.62	1.76	1.83	1.60	1.46	1.54											
145	2.03	1.84	1.72	1.88	1.93	1.81	1.54	1.58											
150	2.08	1.90	1.81	2.00	2.02	1.89	1.67	1.61											
155	2.21	1.96	1.95	2.13	2.12	2.03	1.86	1.68											
160	2.30	2.02	2.10	2.26	2.20	2.21	2.07	1.81											
165	2.35	2.14	2.32	2.39	2.29	2.30	2.24	2.00											
170	2.41	2.35	2.45	2.50	2.22	2.43	2.48	2.30											
175	2.34	2.54	2.64	2.64	2.20	2.54	2.65	2.52											
180	2.34	2.72	2.78	2.78	2.34	2.69	2.77	2.77											

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2021-02-01

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks: