
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.4300A P:10.32W PF:1.000 Freq:0Hz Lamp Flux:334.665x1 lm		
NAME: HCP-36606124	TYPE:	WEIGHT:
SPEC.:HCP-36606124	DIM.: 1000*12*06	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*6	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA		Eff: 32.43 lm/W	
MODEL	NMS0612	Imax(cd)	108.4	S/MH(C0/180)	1.20
NOMINAL POWER(W)	9.6	LOR(%)	100.0	S/MH(C90/270)	1.20
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	334.66	h UP,DN(C0-180)	3.3,54.1
NOMINAL FLUX(lm)	334.665	CIE CLASS	DIRECT	h UP,DN(C180-360)	1.4,41.2
LAMPS INSIDE	1	h up(%)	4.7	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	24	h down(%)	95.3	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

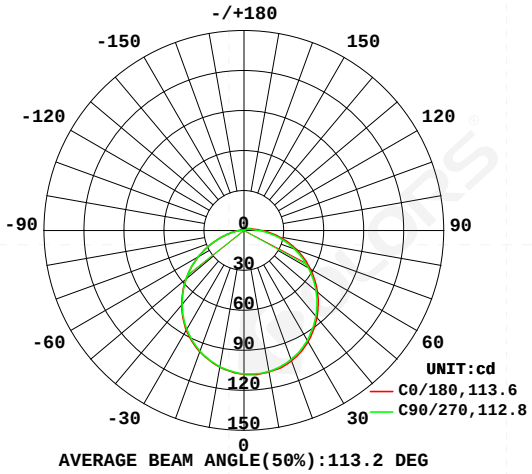

AVERAGE BEAM ANGLE(50%):113.2 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

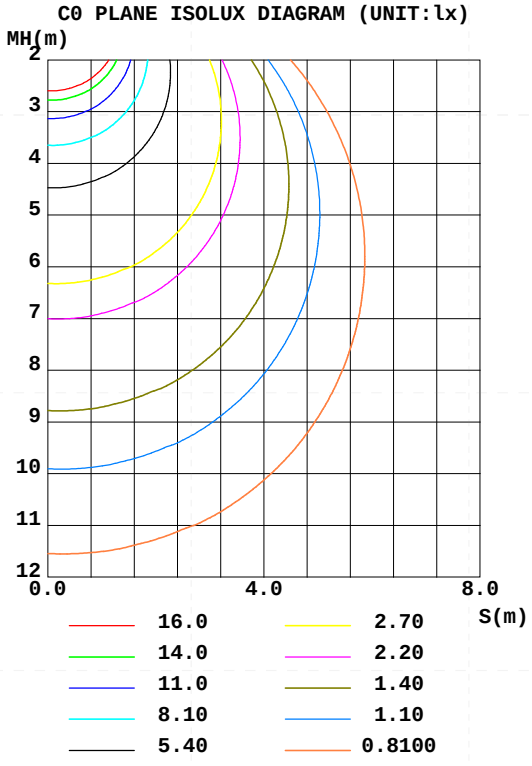

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2020-05-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	107.8	107.7	107.4	107.1	104.1	104.1	103.9	103.5	0- 10	10.18	10.18	3.04,3.04
20	104.2	103.5	103.1	102.9	96.87	96.61	96.41	96.06	10- 20	29.15	39.33	11.8,11.8
30	96.28	95.52	95.12	94.97	86.50	85.96	85.87	85.43	20- 30	44.12	83.45	24.9,24.9
40	85.25	84.42	83.96	83.96	72.80	72.43	72.37	72.00	30- 40	53.09	136.5	40.8,40.8
50	72.07	70.99	70.66	70.61	56.86	56.71	56.73	56.37	40- 50	55.04	191.6	57.2,57.2
60	57.38	56.05	55.75	55.77	39.66	39.73	39.83	39.51	50- 60	50.10	241.7	72.2,72.2
70	41.92	40.24	39.97	40.04	22.54	22.53	22.71	22.41	60- 70	39.33	281.0	84,84
80	26.48	24.41	24.21	24.29	9.591	8.835	8.906	8.761	70- 80	25.24	306.3	91.5,91.5
90	13.87	11.72	11.59	11.63	3.696	2.920	2.904	2.899	80- 90	12.83	319.1	95.3,95.3
100	6.842	5.649	5.628	5.627	2.644	1.993	1.930	1.977	90-100	6.024	325.1	97.1,97.1
110	4.630	3.937	3.945	3.932	1.694	1.082	1.041	1.096	100-110	3.522	328.6	98.2,98.2
120	2.920	2.041	2.075	2.078	1.109	0.8082	0.8284	0.8082	110-120	2.101	330.7	98.8,98.8
130	1.330	1.009	0.9752	0.9953	1.149	0.9218	0.9956	0.9151	120-130	1.105	331.8	99.2,99.2
140	1.189	1.196	1.148	1.183	1.196	1.109	1.169	1.082	130-140	0.8449	332.7	99.4,99.4
150	1.376	1.316	1.262	1.303	1.296	1.269	1.343	1.269	140-150	0.7744	333.5	99.6,99.6
160	1.583	1.403	1.369	1.383	1.436	1.483	1.516	1.489	150-160	0.6378	334.1	99.8,99.8
170	1.710	1.476	1.396	1.476	1.443	1.583	1.637	1.590	160-170	0.4229	334.5	100,100
180	1.610	1.703	1.710	1.710	1.603	1.697	1.697	1.703	170-180	0.1506	334.7	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2020-05-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.4300A P:10.32W PF:1.000 Freq:0Hz Lamp Flux:334.665x1 lm		
NAME: HCP-36606124	TYPE:	WEIGHT:
SPEC.:HCP-36606124	DIM.: 1000*12*06	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*6	Shielding Angle:

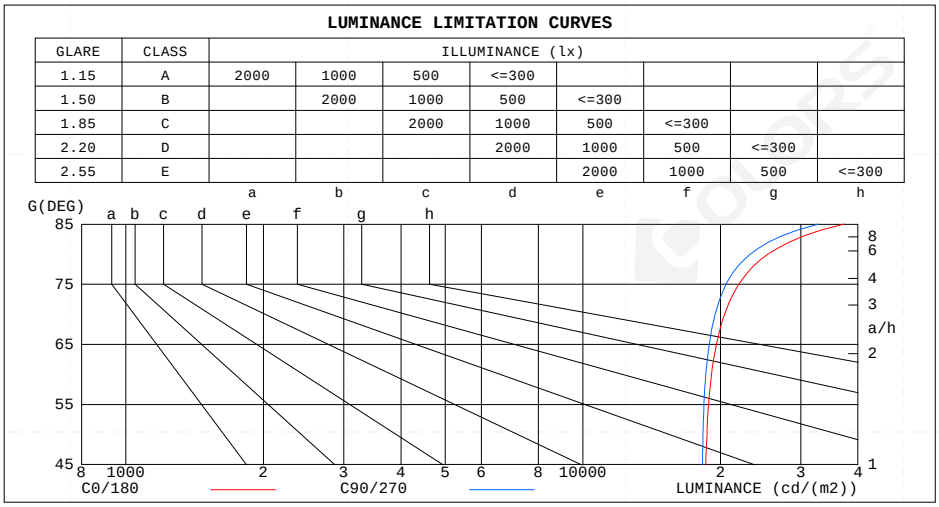

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	37295	32785
80	25419	23233
75	21945	20579
70	20429	19479
65	19601	18911
60	19127	18585
55	18846	18410
50	18686	18322
45	18580	18275


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2020-05-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.4300A P:10.32W PF:1.000 Freq:0Hz Lamp Flux:334.665x1 lm		
NAME: HCP-36606124	TYPE:	WEIGHT:
SPEC.:HCP-36606124	DIM.: 1000*12*06	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*6	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.03	1.03	1.03	.98	.98	.98	.95
1.0	1.02	.97	.93	.99	.95	.91	.94	.90	.87	.89	.86	.84	.85	.82	.80	.78
2.0	.88	.81	.75	.86	.79	.74	.81	.76	.71	.77	.73	.69	.74	.70	.67	.64
3.0	.77	.69	.62	.75	.67	.61	.72	.65	.59	.68	.63	.58	.65	.60	.56	.54
4.0	.68	.59	.52	.67	.58	.52	.63	.56	.50	.61	.54	.49	.58	.53	.48	.46
5.0	.61	.52	.45	.59	.51	.44	.57	.49	.44	.54	.48	.43	.52	.46	.42	.39
6.0	.55	.46	.39	.54	.45	.39	.51	.44	.38	.49	.42	.37	.47	.41	.37	.34
7.0	.50	.41	.35	.49	.40	.34	.47	.39	.34	.45	.38	.33	.43	.37	.33	.30
8.0	.45	.37	.31	.44	.36	.30	.43	.35	.30	.41	.34	.30	.39	.34	.29	.27
9.0	.41	.33	.28	.41	.33	.27	.39	.32	.27	.38	.31	.27	.36	.31	.26	.24
10.0	.38	.30	.25	.38	.30	.25	.36	.29	.24	.35	.29	.24	.34	.28	.24	.22

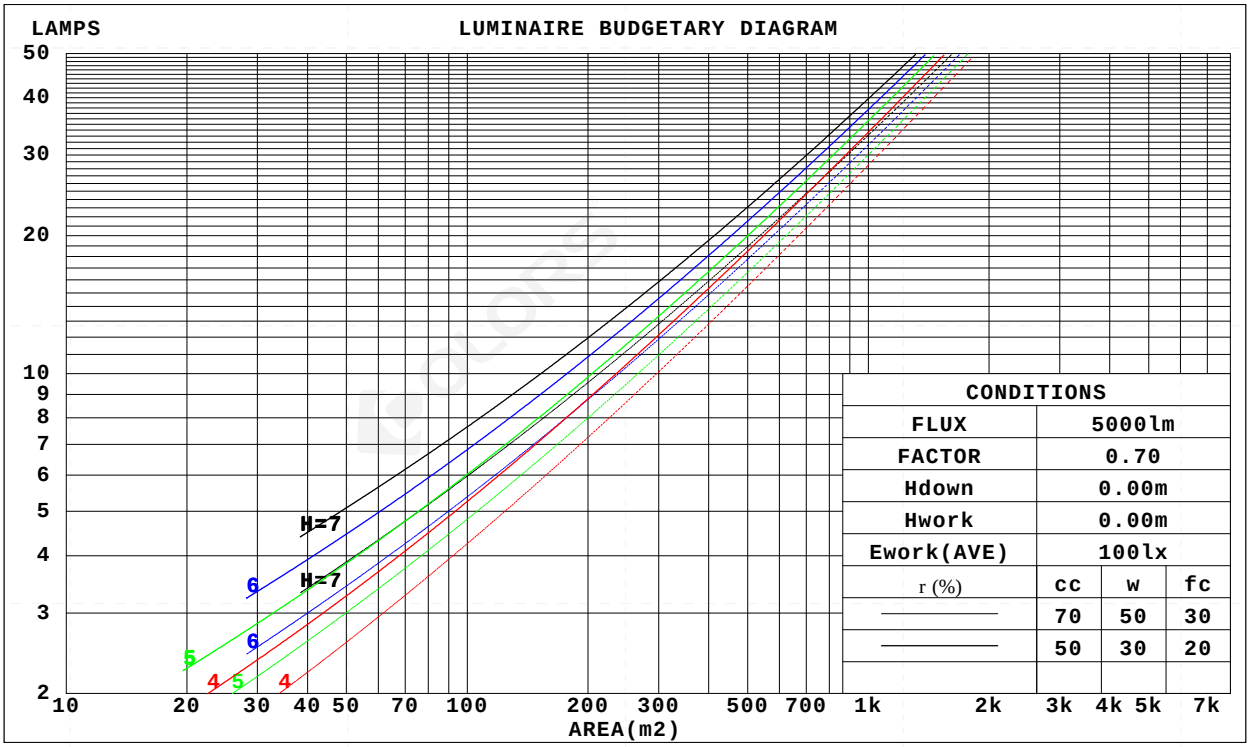

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2020-05-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:24.00V I:0.4300A P:10.32W PF:1.000 Freq:0Hz Lamp Flux:334.665x1 lm		
NAME: HCP-36606124	TYPE:	WEIGHT:
SPEC.:HCP-36606124	DIM.: 1000*12*06	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*6	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.333	.189	.060	.324	.185	.059	.308	.177	.056	.293	.169	.054	.280	.162	.052	
2.0	.303	.166	.051	.296	.163	.050	.282	.157	.049	.268	.151	.047	.256	.145	.046	
3.0	.277	.147	.044	.270	.145	.044	.257	.140	.042	.246	.135	.041	.235	.130	.040	
4.0	.254	.132	.039	.248	.130	.038	.236	.125	.037	.226	.121	.037	.216	.117	.036	
5.0	.233	.119	.034	.228	.117	.034	.218	.113	.033	.208	.110	.033	.199	.106	.032	
6.0	.216	.108	.031	.211	.106	.031	.202	.103	.030	.193	.100	.029	.185	.097	.029	
7.0	.200	.099	.028	.196	.098	.028	.187	.095	.027	.180	.092	.027	.172	.090	.026	
8.0	.186	.091	.026	.183	.090	.025	.175	.087	.025	.168	.085	.025	.161	.083	.024	
9.0	.175	.084	.024	.171	.083	.023	.164	.081	.023	.158	.079	.023	.152	.077	.022	
10.0	.164	.079	.022	.161	.078	.022	.154	.076	.021	.149	.074	.021	.143	.072	.021	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.226	.226	.226	.193	.193	.193	.132	.132	.132	.076	.076	.076	.024	.024	.024	
1.0	.218	.192	.168	.186	.165	.145	.127	.113	.100	.073	.066	.058	.023	.021	.019	
2.0	.210	.168	.133	.180	.144	.115	.123	.100	.080	.071	.058	.047	.023	.019	.015	
3.0	.202	.151	.110	.173	.130	.095	.119	.090	.067	.069	.053	.039	.022	.017	.013	
4.0	.194	.137	.094	.167	.119	.082	.115	.083	.058	.066	.048	.034	.021	.016	.011	
5.0	.187	.127	.083	.160	.110	.072	.110	.077	.051	.064	.045	.030	.021	.015	.010	
6.0	.179	.119	.075	.154	.103	.066	.106	.072	.046	.062	.042	.028	.020	.014	.009	
7.0	.173	.112	.070	.148	.097	.061	.103	.068	.043	.060	.040	.026	.019	.013	.008	
8.0	.166	.106	.065	.143	.092	.057	.099	.065	.040	.058	.038	.024	.019	.013	.008	
9.0	.160	.101	.062	.138	.088	.054	.095	.062	.038	.056	.037	.023	.018	.012	.008	
10.0	.154	.097	.059	.133	.084	.052	.092	.059	.037	.054	.035	.022	.017	.012	.007	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2020-05-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.4300A P:10.32W PF:1.000 Freq:0Hz Lamp Flux:334.665x1 lm		
NAME: HCP-36606124	TYPE:	WEIGHT:
SPEC.:HCP-36606124	DIM.: 1000*12*06	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*6	Shielding Angle:

ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	27.1	28.5	27.4	28.8	29.1	27.0	28.4	27.3	28.7	29.0
	3H	29.0	30.4	29.4	30.7	31.0	28.9	30.2	29.2	30.5	30.9
	4H	30.0	31.3	30.4	31.6	32.0	29.8	31.1	30.2	31.4	31.8
	6H	30.9	32.2	31.3	32.5	32.9	30.6	31.9	31.0	32.2	32.6
	8H	31.4	32.6	31.8	32.9	33.3	31.1	32.2	31.5	32.6	33.0
	12H	31.9	33.0	32.3	33.4	33.8	31.5	32.6	31.9	33.0	33.4
4H	2H	27.7	29.0	28.1	29.4	29.7	27.7	29.0	28.0	29.3	29.7
	3H	29.9	31.1	30.3	31.4	31.8	29.8	30.9	30.2	31.3	31.7
	4H	31.0	32.1	31.5	32.5	32.9	30.8	31.9	31.3	32.3	32.7
	6H	32.1	33.1	32.6	33.5	34.0	31.9	32.8	32.4	33.2	33.7
	8H	32.7	33.6	33.2	34.0	34.5	32.4	33.3	32.9	33.7	34.2
	12H	33.3	34.1	33.8	34.6	35.1	32.9	33.7	33.4	34.2	34.7
8H	4H	31.4	32.3	31.9	32.7	33.2	31.3	32.1	31.8	32.6	33.1
	6H	32.8	33.5	33.3	34.0	34.5	32.5	33.3	33.1	33.8	34.3
	8H	33.5	34.1	34.0	34.6	35.2	33.2	33.9	33.7	34.4	34.9
	12H	34.3	34.9	34.8	35.4	36.0	33.9	34.5	34.5	35.0	35.6
12H	4H	31.5	32.3	32.0	32.8	33.3	31.3	32.1	31.8	32.6	33.1
	6H	32.9	33.6	33.4	34.1	34.6	32.7	33.3	33.2	33.9	34.4
	8H	33.7	34.3	34.3	34.8	35.4	33.5	34.0	34.0	34.5	35.1
Variations with the observer position at spacings:											
S = 1.0H		+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 334.7 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -3.8)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2020-05-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.4300A P:10.32W PF:1.000 Freq:0Hz Lamp Flux:334.665x1 lm		
NAME: HCP-36606124	TYPE:	WEIGHT:
SPEC.:HCP-36606124	DIM.: 1000*12*06	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*6	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	55	43	36	54	43	36	53	42	36	29
0.80	65	53	45	64	52	45	62	52	45	38
1.00	73	62	54	72	61	54	69	62	53	45
1.25	80	69	62	78	68	61	75	66	60	52
1.50	85	75	67	83	74	67	80	71	65	57
2.00	92	83	76	90	81	75	86	79	73	64
2.50	96	88	81	94	86	80	89	83	78	68
3.00	99	92	86	97	90	85	92	87	82	72
4.00	104	97	92	101	95	90	96	91	87	77
5.00	106	101	96	103	98	94	98	94	91	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2020-05-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.4300A P:10.32W PF:1.000 Freq:0Hz Lamp Flux:334.665x1 lm		
NAME: HCP-36606124	TYPE:	WEIGHT:
SPEC.:HCP-36606124	DIM.: 1000*12*06	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*6	Shielding Angle:

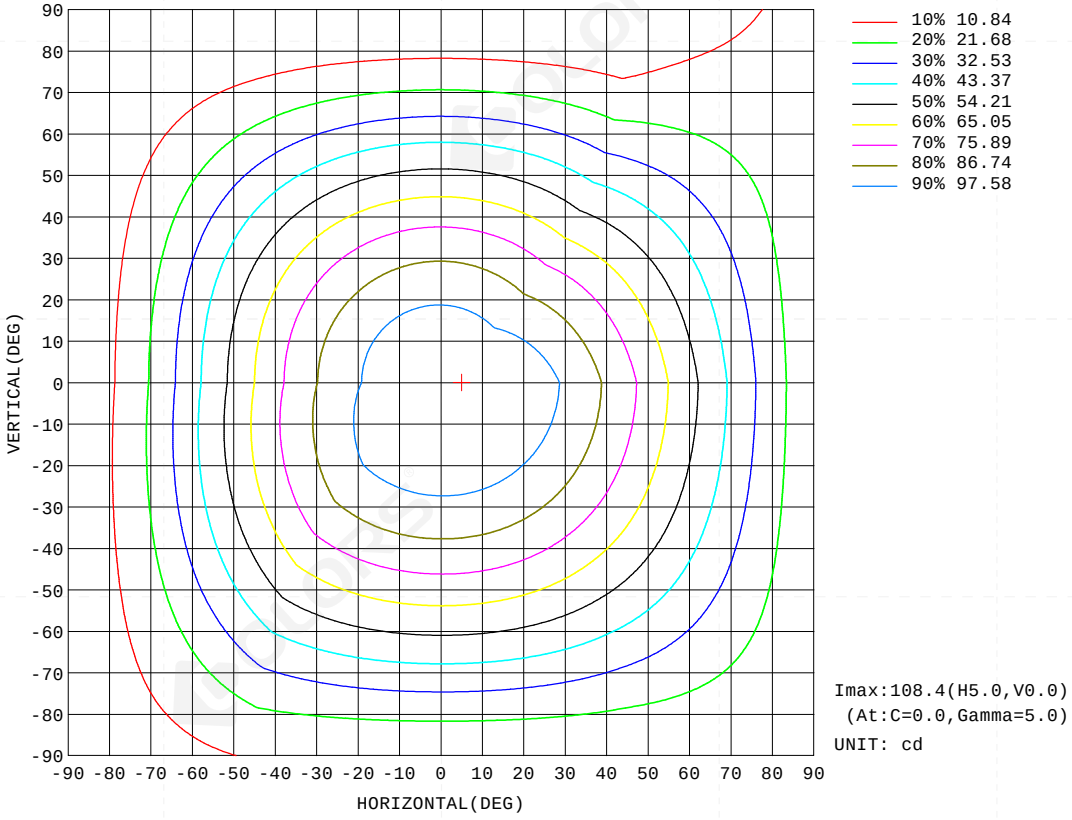


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2020-05-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.00V I:0.4300A P:10.32W PF:1.000 Freq:0Hz Lamp Flux:334.665x1 lm		
NAME: HCP-36606124	TYPE:	WEIGHT:
SPEC.:HCP-36606124	DIM.: 1000*12*06	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*6	Shielding Angle:

Flux out:227.5 lm

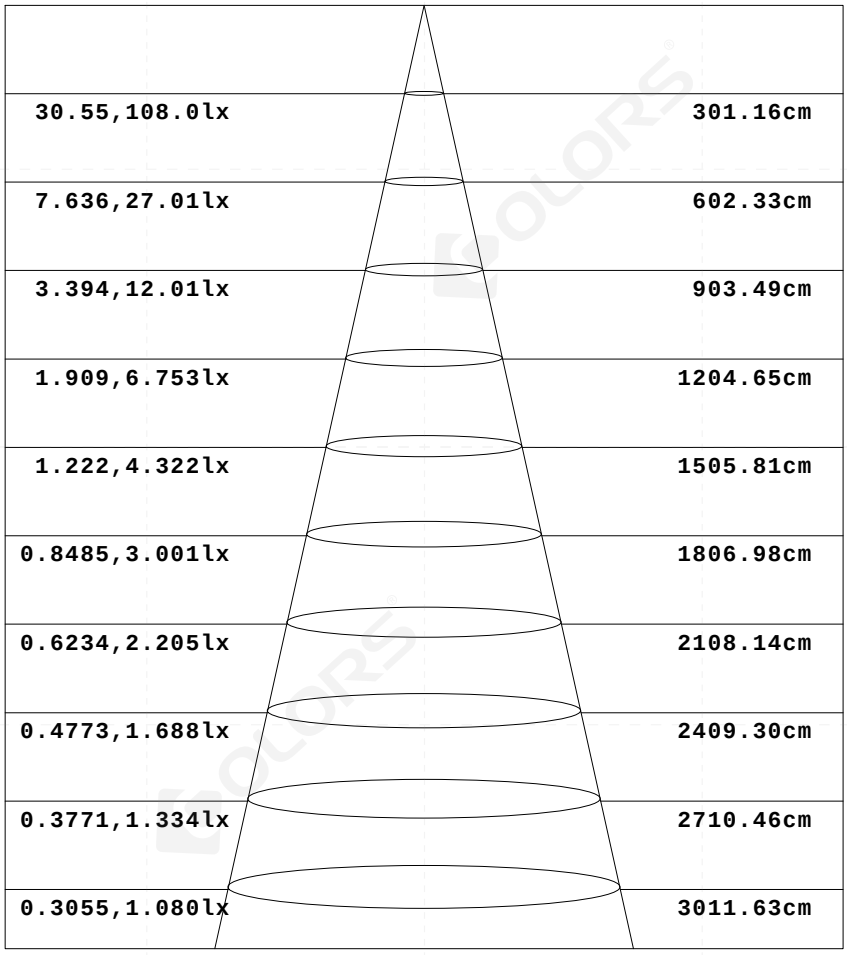


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2020-05-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:24.00V I:0.4300A P:10.32W PF:1.000 Freq:0Hz Lamp Flux:334.665x1 lm		
NAME: HCP-36606124	TYPE:	WEIGHT:
SPEC.:HCP-36606124	DIM.: 1000*12*06	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*6	Shielding Angle:

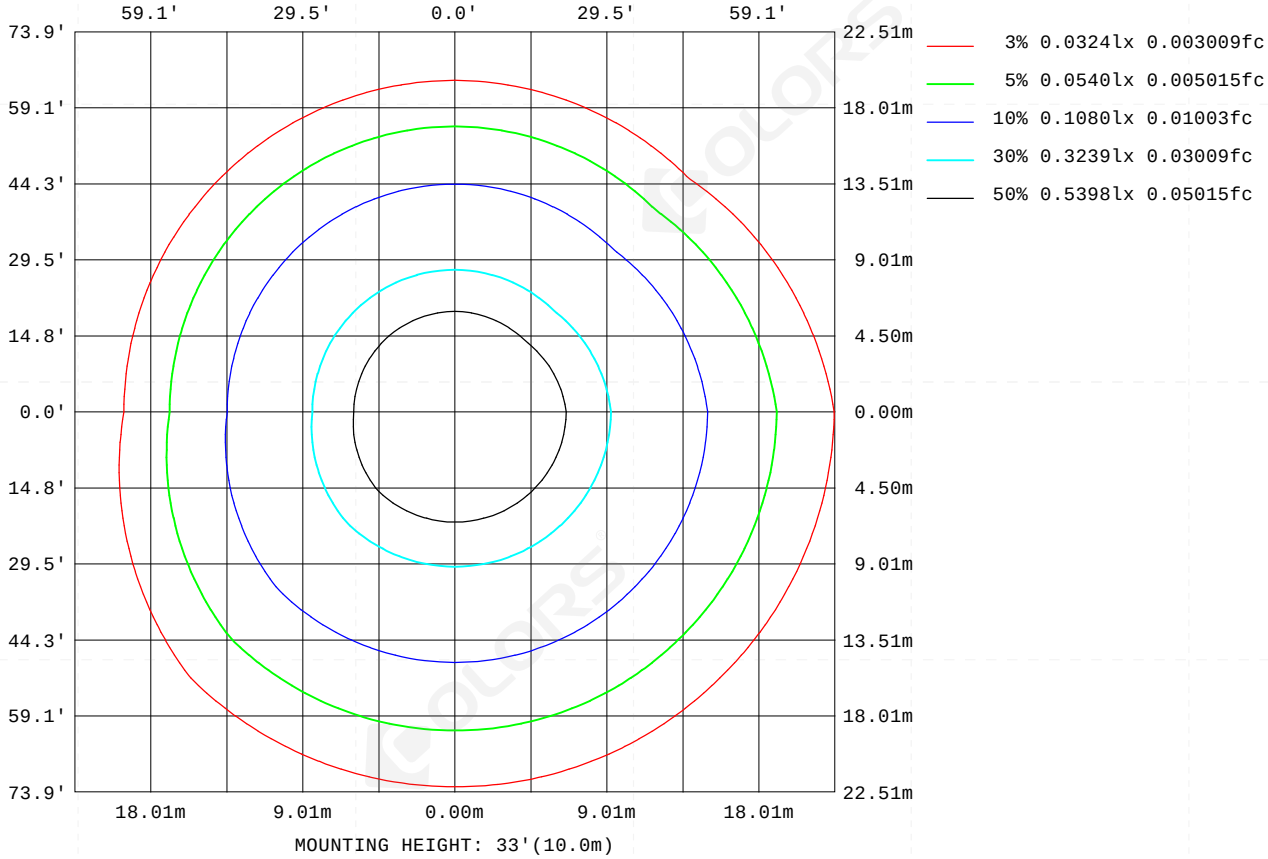

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2020-05-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

Planar Illuminance Curve

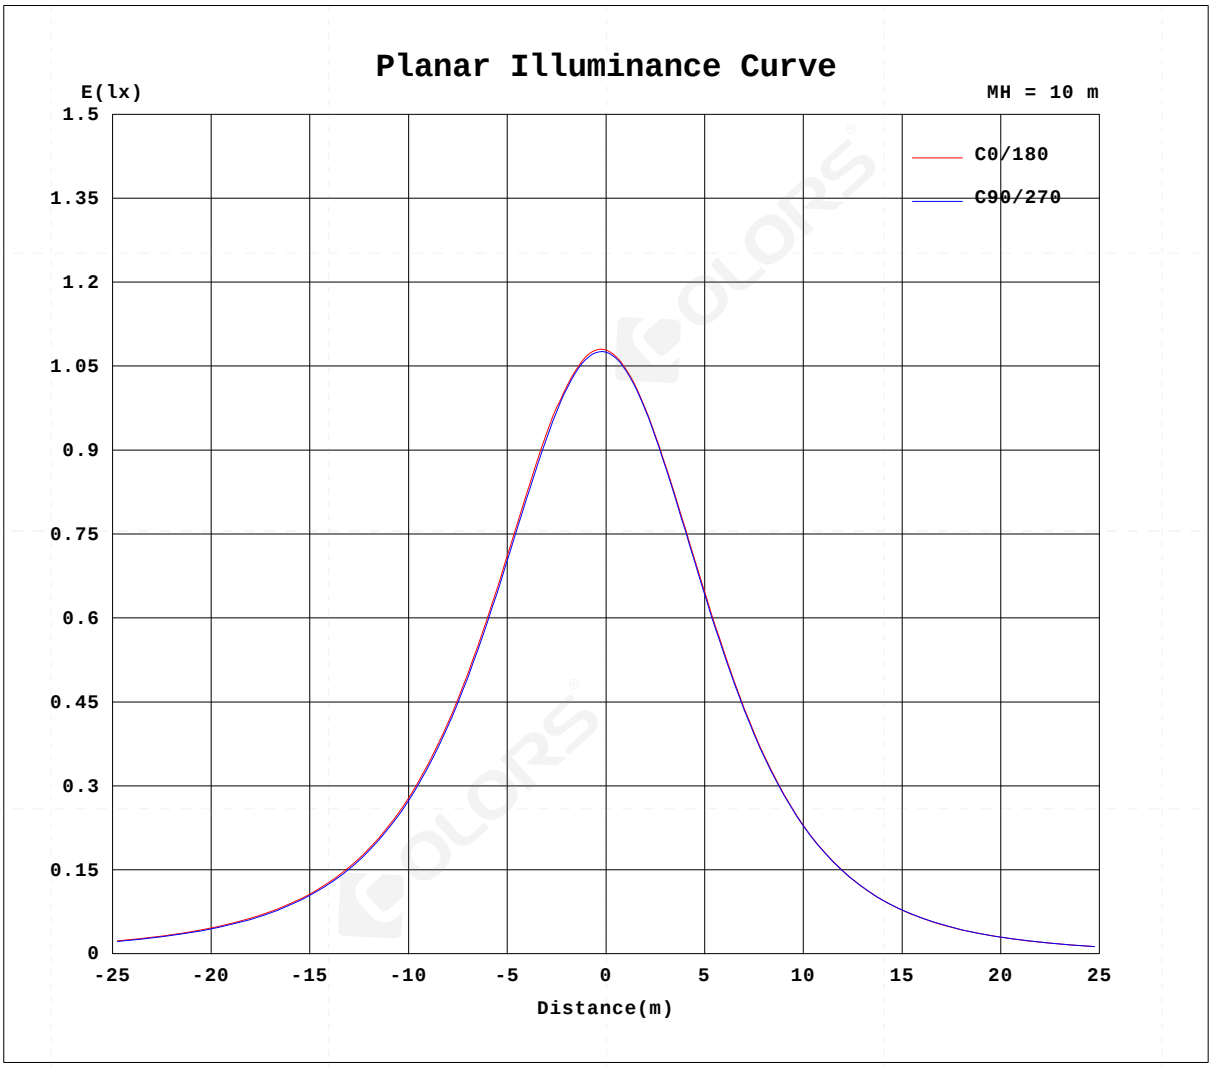

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2020-05-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.4300A P:10.32W PF:1.000 Freq:0Hz Lamp Flux:334.665x1 lm		
NAME: HCP-36606124	TYPE:	WEIGHT:
SPEC.:HCP-36606124	DIM.: 1000*12*06	SERIAL No.:01
MFR.: HAVIT COMMERCIAL	SUR.:1000*6	Shielding Angle:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	45	90	135	180	225	270	315
0	108	108	108	107	108	108	108	107
5	108	108	108	108	106	106	106	106
10	108	108	107	107	104	104	104	103
15	107	106	106	106	101	101	101	100
20	104	103	103	103	96.9	96.6	96.4	96.1
25	101	99.9	99.6	99.4	92.1	91.6	91.5	91.1
30	96.3	95.5	95.1	95.0	86.5	86.0	85.9	85.4
35	91.1	90.3	89.9	89.8	80.0	79.5	79.4	79.0
40	85.3	84.4	84.0	84.0	72.8	72.4	72.4	72.0
45	78.8	78.0	77.5	77.5	65.0	64.8	64.8	64.5
50	72.1	71.0	70.7	70.6	56.9	56.7	56.7	56.4
55	64.9	63.6	63.4	63.3	48.3	48.3	48.4	48.1
60	57.4	56.1	55.8	55.8	39.7	39.7	39.8	39.5
65	49.7	48.2	48.0	48.0	30.9	31.0	31.1	30.9
70	41.9	40.2	40.0	40.0	22.5	22.5	22.7	22.4
75	34.1	32.2	32.0	32.0	15.1	14.8	15.0	14.8
80	26.5	24.4	24.2	24.3	9.59	8.84	8.91	8.76
85	19.5	17.4	17.1	17.3	5.84	4.97	5.06	4.93
90	13.9	11.7	11.6	11.6	3.70	2.92	2.90	2.90
95	9.66	7.83	7.71	7.77	2.98	2.31	2.25	2.29
100	6.84	5.65	5.63	5.63	2.64	1.99	1.93	1.98
105	5.66	4.73	4.64	4.68	2.23	1.55	1.50	1.54
110	4.63	3.94	3.94	3.93	1.69	1.08	1.04	1.10
115	3.90	3.03	3.04	3.05	1.35	0.86	0.85	0.86
120	2.92	2.04	2.08	2.08	1.11	0.81	0.83	0.81
125	1.96	1.18	1.26	1.25	1.11	0.83	0.90	0.85
130	1.33	1.01	0.98	1.00	1.15	0.92	1.00	0.92
135	1.16	1.11	1.06	1.10	1.18	1.06	1.09	1.07
140	1.19	1.20	1.15	1.18	1.20	1.11	1.17	1.08
145	1.26	1.26	1.17	1.24	1.24	1.18	1.26	1.18
150	1.38	1.32	1.26	1.30	1.30	1.27	1.34	1.27
155	1.48	1.37	1.28	1.36	1.37	1.36	1.44	1.37
160	1.58	1.40	1.37	1.38	1.44	1.48	1.52	1.49
165	1.68	1.44	1.37	1.42	1.50	1.50	1.58	1.50
170	1.71	1.48	1.40	1.48	1.44	1.58	1.64	1.59
175	1.63	1.60	1.52	1.58	1.47	1.64	1.70	1.61
180	1.61	1.70	1.71	1.71	1.60	1.70	1.70	1.70

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2020-05-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks: