FREE CUT IP67 HAVIFLEX TOP BEND LED STRIP

Web: www havitcommercial.com.au
Email: sales@havitcommercial.com.au
Phone: 02 9381 8383

ADDRESS: 8/133 Beauchamp Road, Matraville, N.S.W., 2036

Warranty T & Cs


Website

HAVIT COMMERCIAL

7.2W IP67 HAVIFLEX LED STRIP

WATTAGE PER METRE	7.2W
LED CHIP TYPE	2835
SIZE	10MM X 10MM (NOT INCLUDING END CAPS)
PCB	30Z
LED CHIPS PER METRE	168LED
CUT INCREMENTS	EVERY 5.95MM
COLOUR TEMP	2700K | 3000K | 4000K
LUMEN OUTPUT	435LM | 435LM | 485LM
INPUT VOLTAGE	24V DC CONSTANT VOLTAGE
WIRING	PARALLEL
MOUNTING	MOUNTING CLIPS (4 SUPPLIED PER METRE)
MAXIMUM LENGTH	10,000MM
REQUIREMENTS	24V DC CONSTANT VOLTAGE LED DRIVER
DIMMING	0-1/10V, DALI, DMX, RF, WIFI
OPERATING TEMP.	-20° TO 65° CELCIUS
AMBIENT TEMP.	-20° TO 45° CELCIUS
CRI	RA >90
SDCM	<3
BEAM ANGLE	120°
IP RATING	IP67
LIFE EXPECTANCY	>50,000 HRS*
WARRANTY	5 YEARS REPLACEMENT*

PRODUCT ORDERING



HCP-36610102	2700K	435LM
HCP-36610103	3000K	435LM
HCP-36610104	4000K	485LM


IP67 INDOOR/OUTDOOR WEATHERPROOF

5 Years Warranty


*SEE WARRANTY TERMS & CONDITIONS FOR MORE INFORMATION.




BENDING RADIUS

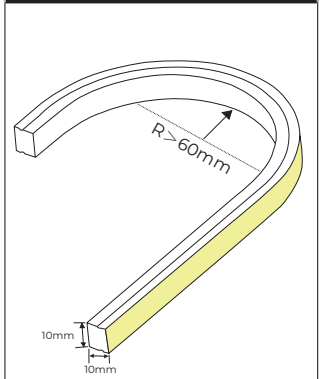





DIMENSIONS

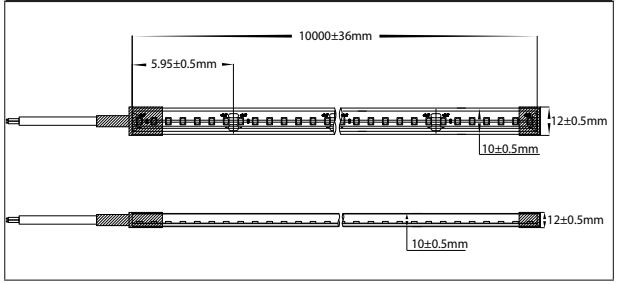


PHOTOMETRICS



OPTIONAL HAVIT COMPATIBLE ACCESSORIES

IMAGE	DIMENSIONS	PART NUMBER	DESCRIPTION
		HCP-3661010-AC	ALUMINIUM CHANNEL TO SUIT - PER METRE (UP TO 3M LENGTH)
		HCP-3661010-BC	BENDABLE CHANNEL TO SUIT - 1 METRE (SUPPLIED AS 2X 500MM LENGTHS)
		HCP-3661010-MC	MOUNTING CLIP TO SUIT (SOLD IN PAIRS)

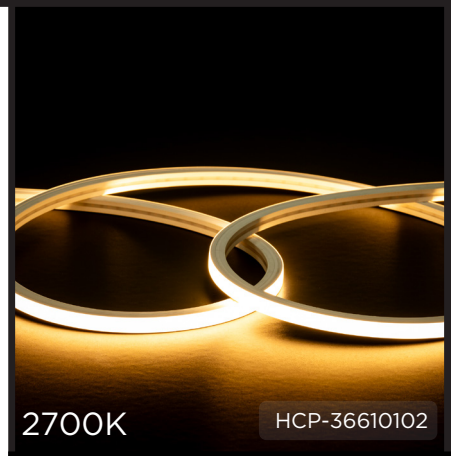





FREE CUT IP67 HAVIFLEX TOP BEND LED STRIP

COMPATIBLE CONTROLLLERS & DRIVERS

Web: www havitcommercial.com.au
Email: sales@havitcommercial.com.au
Phone: 02 9381 8383


ADDRESS: 8/133 Beauchamp Road, Matraville, N.S.W., 2036

Warranty T & Cs

Website

EXAMPLES OF COMPATIBLE CONTROLLERS

SINGLE COLOUR LED STRIP CONTROLLERS

TOUCH PANEL	REMOTE CONTROLLER	WIFI + RF	DMX
 HCP-75215	 HCP-72812	 HCP-77243	 HCP-73211

EXAMPLES OF COMPATIBLE DRIVERS

TRIAC DIMMABLE	DALI 2 OR PUSH DIM	NON DIMMABLE	TRIAC + 0-1 / 10V
 HCP-51221	 HCP-522231	 HCP-52230	 HCP-52222

SCAN TO EXPLORE FULL RANGE OF LED DRIVERS

SCAN TO EXPLORE FULL RANGE OF SINGLE COLOURED LED STRIP CONTROLLERS

Installation Note:

When installed outdoors, exposure to extreme heat and direct sunlight may cause deterioration, yellowing of silicon cover, expansion and breakage. Always allow for thermal movement when installing; do not stretch, overtighten or restrict the neon flex. Install on clean, dry, stable surfaces using the supplied fixings. Avoid surfaces that retain excessive heat and check compatibility with timber, metal, masonry and painted finishes. Damage caused by unsuitable conditions or incorrect installation may not be covered by warranty.

