IP67
HAVIFLEX MULTI BEND LED STRIP

Web: www havitcommercial.com.au
Email: sales@havitcommercial.com.au
Phone: 02 9381 8383

ADDRESS: 8/133 Beauchamp Road, Matraville, N.S.W., 2036

Warranty T & Cs

Website

HAVIT COMMERCIAL

8W IP67 HAVIFLEX LED STRIP	
WATTAGE PER METRE	8W
LED CHIP TYPE	2835
SIZE	13MM X 12MM (NOT INCLUDING END CAPS)
PCB	30Z
LED CHIPS PER METRE	120LED
CUT INCREMENTS	EVERY 41.66MM
COLOUR TEMP	2700K | 3000K | 4000K | 5000K
LUMEN OUTPUT	535LM | 560LM | 595LM | 595LM
INPUT VOLTAGE	24V DC CONSTANT VOLTAGE
WIRING	PARALLEL
MOUNTING	MOUNTING CLIPS (4 SUPPLIED PER METRE)
MAXIMUM LENGTH	5,000MM
REQUIREMENTS	24V DC CONSTANT VOLTAGE LED DRIVER
DIMMING	0-1/10V, DALI, DMX, RF, WIFI
OPERATING TEMP.	-20° TO 65° CELCIUS
AMBIENT TEMP	-20° TO 45° CELCIUS
CRI	RA >90
SDCM	<3
BEAM ANGLE	120°
IP RATING	IP67
LIFE EXPECTANCY	>50,000 HRS*
WARRANTY	5 YEARS REPLACEMENT*

PRODUCT ORDERING			
	HCP-3764082	2700K	535LM
	HCP-3764083	3000K	560LM
	HCP-3764084	4000K	580LM
	HCP-3764085	5000K	595LM

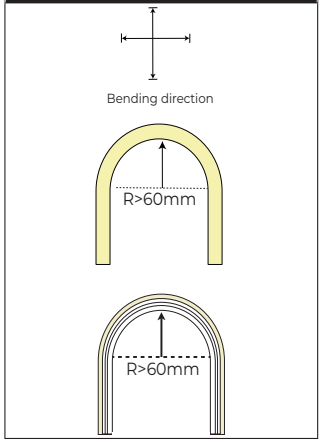
IP67 INDOOR/OUTDOOR WEATHERPROOF

5 Years Warranty


*SEE WARRANTY TERMS & CONDITIONS FOR MORE INFORMATION.




BENDING RADIUS






DIMENSIONS

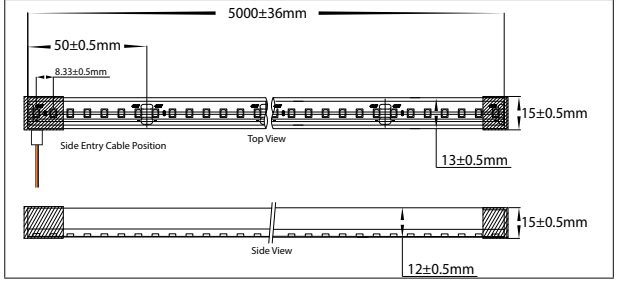

PHOTOMETRICS



OPTIONAL HAVIT COMPATIBLE ACCESSORIES

IMAGE	DIMENSIONS	PART NUMBER	DESCRIPTION
		HCP-3764-AC	ALUMINIUM CHANNEL TO SUIT - PER METRE (UP TO 3M LENGTH)
		HCP-3764-BC	BENDABLE CHANNEL TO SUIT - 1000MM (2X 500MM LENGTHS)
		HCP-3764-MC	MOUNTING CLIP TO SUIT (SOLD IN PAIRS)


HCP-3764082


HCP-3764083


HCP-3764084


HCP-3764085

10M RUN IP67 HAVIFLEX SIDE BEND LED STRIP

COMPATIBLE CONTROLLLERS & DRIVERS

Web: www havitcommercial.com.au
Email: sales@havitcommercial.com.au
Phone: 02 9381 8383


ADDRESS: 8/133 Beauchamp Road, Matraville, N.S.W., 2036

Warranty T & Cs

Website

EXAMPLES OF COMPATIBLE CONTROLLERS

SINGLE COLOUR LED STRIP CONTROLLERS

TOUCH PANEL	REMOTE CONTROLLER	WIFI	DMX
 HCP-75215	 HCP-78212	 HCP-77243	 HCP-73211

EXAMPLES OF COMPATIBLE DRIVERS

TRIAC	DALI 2 OR PUSH DIM	NON DIMMABLE	TRIAC + 0-1 / 10V
 HCP-51221	 HCP-522231	 HCP-52230	 HCP-52222

SCAN TO EXPLORE FULL RANGE OF LED DRIVERS

SCAN TO EXPLORE FULL RANGE OF SINGLE COLOURED LED STRIP CONTROLLERS

Installation Note:

When installed outdoors, exposure to extreme heat and direct sunlight may cause deterioration, yellowing of silicon cover, expansion and breakage. Always allow for thermal movement when installing; do not stretch, overtighten or restrict the neon flex. Install on clean, dry, stable surfaces using the supplied fixings. Avoid surfaces that retain excessive heat and check compatibility with timber, metal, masonry and painted finishes. Damage caused by unsuitable conditions or incorrect installation may not be covered by warranty.

