
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.16V I:0.0578A P:12.925W PF:0.9695 Freq:59.98Hz Lamp Flux:1299.52x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA Eff: 100.54 lm/W			
MODEL	HCP-3865124	Imax(cd)	506.2	S/MH(C0/180)	1.15
NOMINAL POWER(W)	12.91	LOR(%)	100.0	S/MH(C90/270)	1.22
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1299.5	η UP,DN(C0-180)	0.0,50.2
NOMINAL FLUX(lm)	1299.52	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.7
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	220	η down(%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

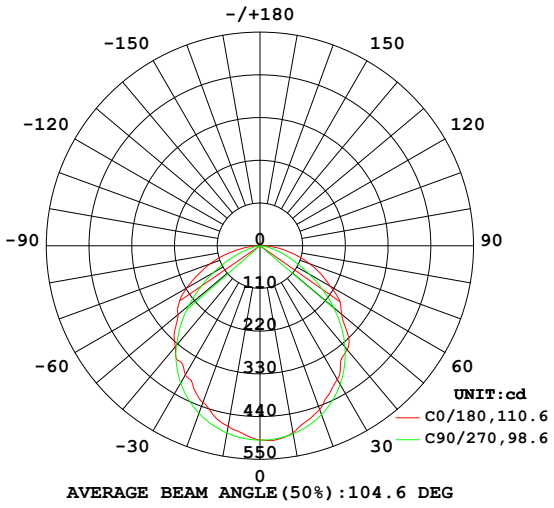

AVERAGE BEAM ANGLE(50%):104.6 DEG

PLANAR ISOLUX DIAGRAM(UNIT:lx)

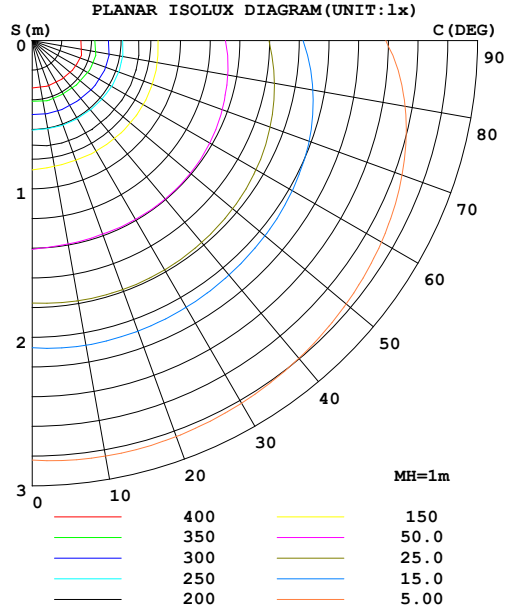

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:15 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	488.8	497.2	491.5	475.6	472.3	474.8	489.6	500.0	0- 10	47.06	47.06	3.62,3.62
20	449.0	458.1	462.6	434.2	429.7	434.0	459.3	462.6	10- 20	132.5	179.5	13.8,13.8
30	397.9	410.2	412.4	380.4	384.7	378.9	408.6	414.1	20- 30	195.6	375.1	28.9,28.9
40	348.7	349.0	340.3	322.3	339.5	318.1	334.0	354.1	30- 40	230.3	605.4	46.6,46.6
50	275.0	276.4	247.6	270.9	275.9	266.8	239.4	278.9	40- 50	234.5	839.9	64.6,64.6
60	210.1	213.7	147.4	194.2	218.8	194.4	139.2	214.0	50- 60	206.8	1047	80.5,80.5
70	136.5	129.6	67.13	112.4	137.5	111.6	56.75	129.3	60- 70	151.5	1198	92.2,92.2
80	63.41	59.96	15.46	40.81	55.72	42.13	4.929	60.74	70- 80	81.43	1280	98.5,98.5
90	6.319	2.860	0	0	0	0	0	3.426	80- 90	19.62	1299	100,100
100	0	0	0	0	0	0	0	0	90-100	0.1741	1300	100,100
110	0	0	0	0	0	0	0	0	100-110	0	1300	100,100
120	0	0	0	0	0	0	0	0	110-120	0	1300	100,100
130	0	0	0	0	0	0	0	0	120-130	0	1300	100,100
140	0	0	0	0	0	0	0	0	130-140	0	1300	100,100
150	0	0	0	0	0	0	0	0	140-150	0	1300	100,100
160	0	0	0	0	0	0	0	0	150-160	0	1300	100,100
170	0	0	0	0	0	0	0	0	160-170	0	1300	100,100
180	0	0	0	0	0	0	0	0	170-180	0	1300	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:15 June 2022


γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:230.16V I:0.0578A P:12.925W PF:0.9695 Freq:59.98Hz **Lamp Flux:1299.52x1 lm**		
NAME:	**TYPE:**	**WEIGHT:**
SPEC.:	**DIM.:**	**SERIAL No.:**
MFR.: EVERFINE	**SUR.:**	**Shielding Angle:**

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

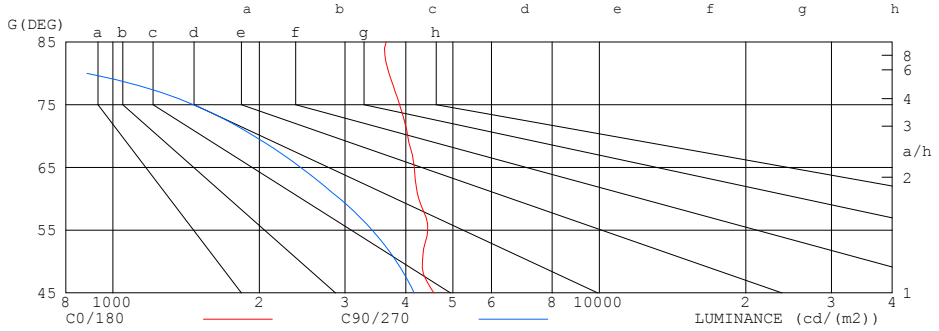

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	3645	4
80	3696	885
75	3884	1464
70	4039	1951
65	4165	2433
60	4253	2930
55	4440	3413
50	4329	3827
45	4568	4163

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:15 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:


CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:230.16V I:0.0578A P:12.925W PF:0.9695 Freq:59.98Hz Lamp Flux:1299.52x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	1.00	.97	1.02	.98	.95	.98	.95	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.85	.79	.89	.83	.78	.86	.81	.76	.83	.78	.74	.80	.76	.73	.71
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.68	.63	.70	.66	.62	.60
4.0	.71	.63	.56	.70	.62	.56	.67	.60	.55	.65	.59	.54	.63	.58	.53	.51
5.0	.64	.55	.48	.63	.54	.48	.61	.53	.48	.59	.52	.47	.57	.51	.47	.44
6.0	.58	.49	.42	.57	.48	.42	.55	.47	.42	.53	.46	.41	.52	.46	.41	.39
7.0	.52	.44	.37	.51	.43	.37	.50	.42	.37	.48	.42	.37	.47	.41	.36	.35
8.0	.48	.39	.33	.47	.39	.33	.46	.38	.33	.44	.38	.33	.43	.37	.33	.31
9.0	.44	.36	.30	.43	.35	.30	.42	.35	.30	.41	.34	.30	.40	.34	.30	.28
10.0	.40	.33	.27	.40	.32	.27	.39	.32	.27	.38	.32	.27	.37	.31	.27	.25

LAMPS

LUMINAIRE BUDGETARY DIAGRAM

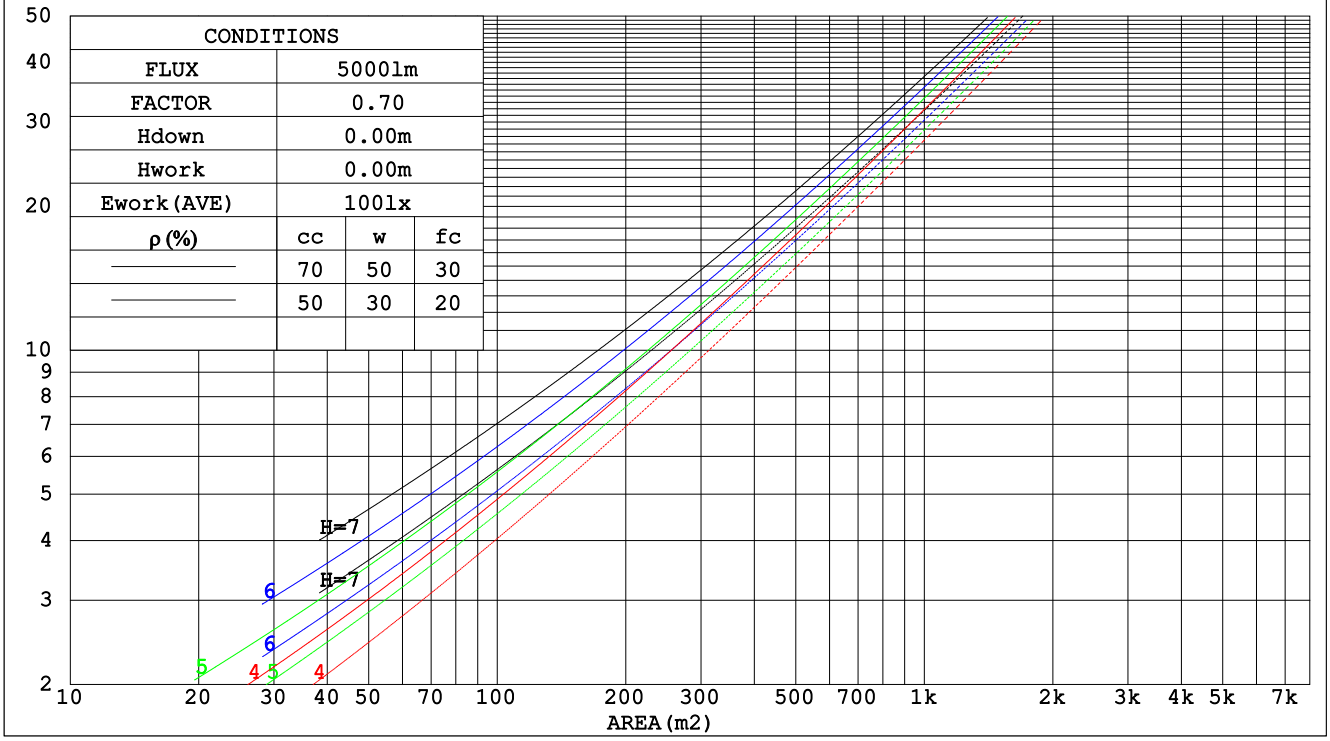

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:15 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:230.16V I:0.0578A P:12.925W PF:0.9695 Freq:59.98Hz Lamp Flux:1299.52x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.299	.170	.054	.292	.167	.053	.279	.160	.051	.267	.154	.049	.256	.148	.048	
2.0	.284	.155	.048	.277	.153	.047	.266	.148	.046	.255	.143	.045	.245	.139	.044	
3.0	.264	.140	.042	.258	.138	.042	.248	.134	.041	.238	.131	.040	.230	.127	.039	
4.0	.244	.127	.037	.239	.125	.037	.230	.122	.036	.222	.119	.036	.214	.116	.035	
5.0	.226	.115	.033	.222	.114	.033	.214	.111	.033	.206	.109	.032	.199	.106	.032	
6.0	.210	.105	.030	.206	.104	.030	.199	.102	.030	.192	.100	.029	.186	.098	.029	
7.0	.196	.097	.027	.193	.096	.027	.186	.094	.027	.180	.092	.027	.174	.091	.027	
8.0	.183	.090	.025	.180	.089	.025	.174	.087	.025	.169	.086	.025	.164	.084	.025	
9.0	.172	.083	.023	.169	.082	.023	.164	.081	.023	.159	.080	.023	.155	.078	.023	
10.0	.162	.078	.022	.159	.077	.021	.155	.076	.021	.150	.075	.021	.146	.073	.021	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.081	.061	.053	.047	.019	.017	.015	
2.0	.171	.132	.099	.147	.114	.086	.101	.079	.060	.058	.046	.035	.019	.015	.011	
3.0	.163	.114	.075	.140	.099	.065	.096	.069	.046	.056	.040	.027	.018	.013	.009	
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.148	.091	.048	.127	.078	.042	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.141	.082	.040	.121	.071	.035	.084	.050	.024	.049	.029	.015	.016	.010	.005	
7.0	.134	.075	.034	.116	.065	.029	.080	.046	.021	.046	.027	.012	.015	.009	.004	
8.0	.128	.069	.029	.110	.060	.025	.076	.042	.018	.044	.025	.011	.014	.008	.004	
9.0	.122	.064	.026	.105	.056	.022	.073	.039	.016	.042	.023	.009	.014	.008	.003	
10.0	.116	.060	.023	.100	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:15 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:230.16V I:0.0578A P:12.925W PF:0.9695 Freq:59.98Hz Lamp Flux:1299.52x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.3	18.8	17.6	19.0	19.2	16.5	18.0	16.8	18.2	18.4
3H	19.0	20.3	19.3	20.6	20.8	17.5	18.8	17.8	19.1	19.3
4H	19.6	21.0	20.0	21.2	21.5	17.7	19.0	18.0	19.3	19.5
6H	20.2	21.4	20.5	21.7	22.0	17.8	19.0	18.1	19.3	19.6
8H	20.4	21.6	20.7	21.8	22.1	17.8	19.0	18.1	19.2	19.5
12H	20.5	21.7	20.9	22.0	22.3	17.7	18.9	18.1	19.2	19.5
4H 2H	17.9	19.2	18.2	19.5	19.7	17.3	18.6	17.6	18.8	19.1
3H	19.8	20.9	20.1	21.2	21.5	18.5	19.7	18.9	20.0	20.3
4H	20.6	21.6	21.0	22.0	22.3	18.9	20.0	19.3	20.3	20.6
6H	21.3	22.2	21.7	22.6	22.9	19.1	20.1	19.5	20.4	20.8
8H	21.5	22.4	21.9	22.8	23.1	19.1	20.0	19.6	20.4	20.8
12H	21.7	22.5	22.2	22.9	23.3	19.1	19.9	19.5	20.3	20.7
8H 4H	20.8	21.7	21.2	22.1	22.4	19.4	20.3	19.8	20.6	21.0
6H	21.7	22.4	22.1	22.8	23.2	19.8	20.5	20.2	20.9	21.3
8H	22.1	22.7	22.5	23.1	23.6	19.9	20.5	20.3	20.9	21.4
12H	22.4	22.9	22.9	23.4	23.8	19.9	20.4	20.3	20.9	21.3
12H 4H	20.8	21.6	21.3	22.0	22.4	19.5	20.3	19.9	20.6	21.0
6H	21.7	22.4	22.2	22.8	23.3	19.9	20.6	20.4	21.0	21.4
8H	22.2	22.7	22.6	23.2	23.6	20.1	20.6	20.5	21.1	21.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.5				
2.0H	+ 0.1 / - 0.3					+ 0.3 / - 0.9				

CIE Pub.117, 1300 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.9)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:15 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:230.16V I:0.0578A P:12.925W PF:0.9695 Freq:59.98Hz Lamp Flux:1299.52x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	59	47	40	58	47	40	57	46	40	34
0.80	69	57	50	68	57	50	66	56	49	43
1.00	77	66	59	76	66	59	74	67	58	51
1.25	84	74	67	83	73	67	80	72	66	59
1.50	89	79	73	87	79	72	84	77	71	64
2.00	96	87	81	94	86	80	91	84	79	71
2.50	100	92	86	98	91	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	88	79
4.00	107	101	97	104	99	95	100	96	93	84
5.00	109	104	101	107	102	99	102	99	96	87
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:15 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:230.16V I:0.0578A P:12.925W PF:0.9695 Freq:59.98Hz **Lamp Flux:1299.52x1 lm**		
NAME:	**TYPE:**	**WEIGHT:**
SPEC.:	**DIM.:**	**SERIAL No.:**
MFR.: EVERFINE	**SUR.:**	**Shielding Angle:**

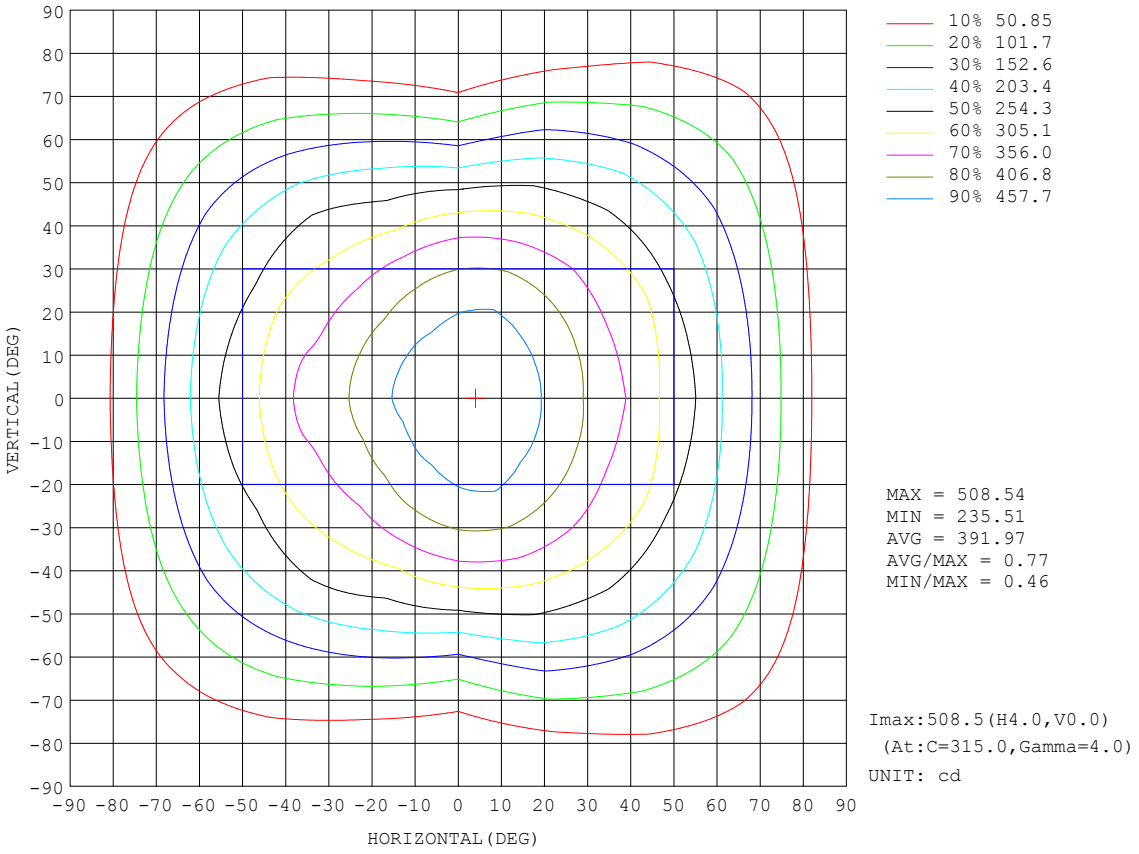


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:15 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

AAI Figure

Test:U:230.16V I:0.0578A P:12.925W PF:0.9695 Freq:59.98Hz Lamp Flux:1299.52x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

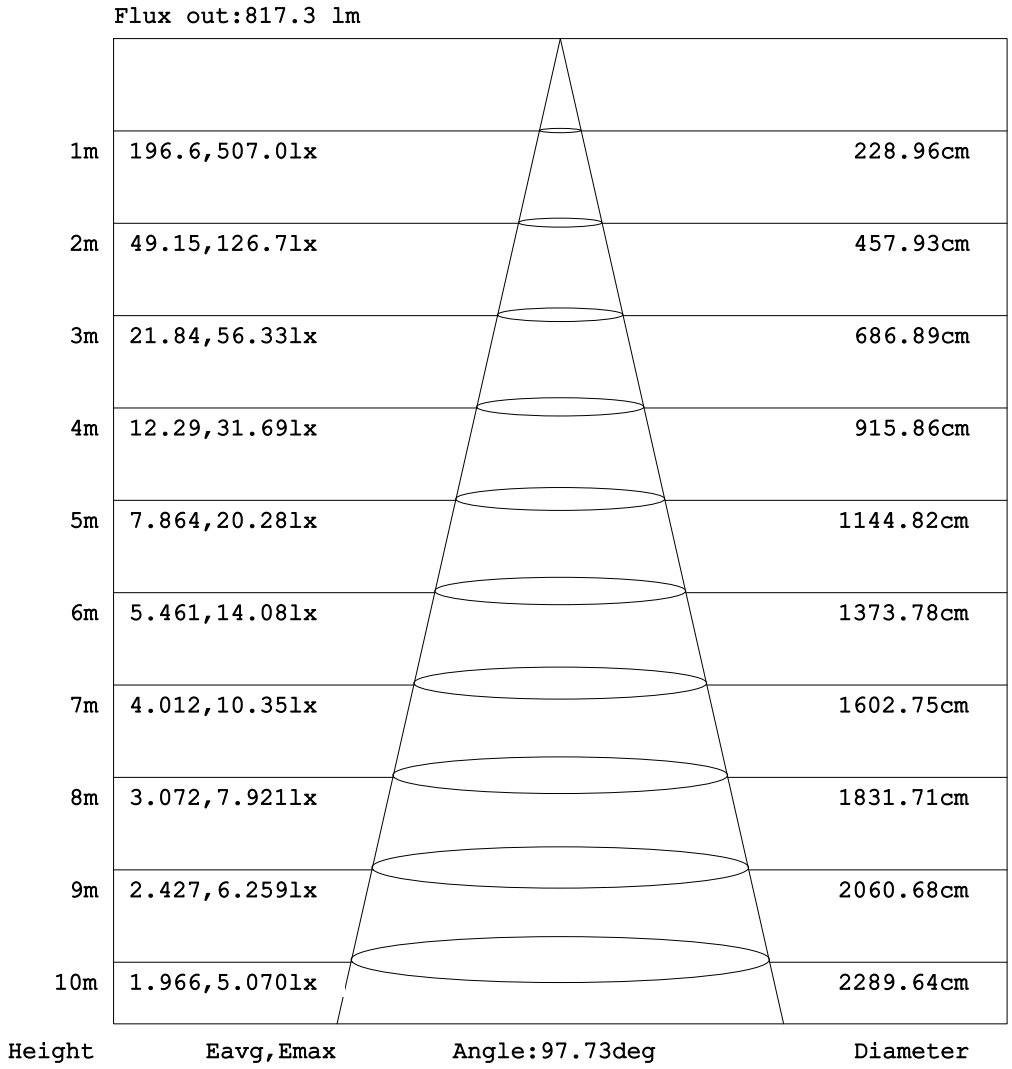


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:15 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:230.16V I:0.0578A P:12.925W PF:0.9695 Freq:59.98Hz **Lamp Flux:1299.52x1 lm**		
NAME:	**TYPE:**	**WEIGHT:**
SPEC.:	**DIM.:**	**SERIAL No.:**
MFR.: EVERFINE	**SUR.:**	**Shielding Angle:**

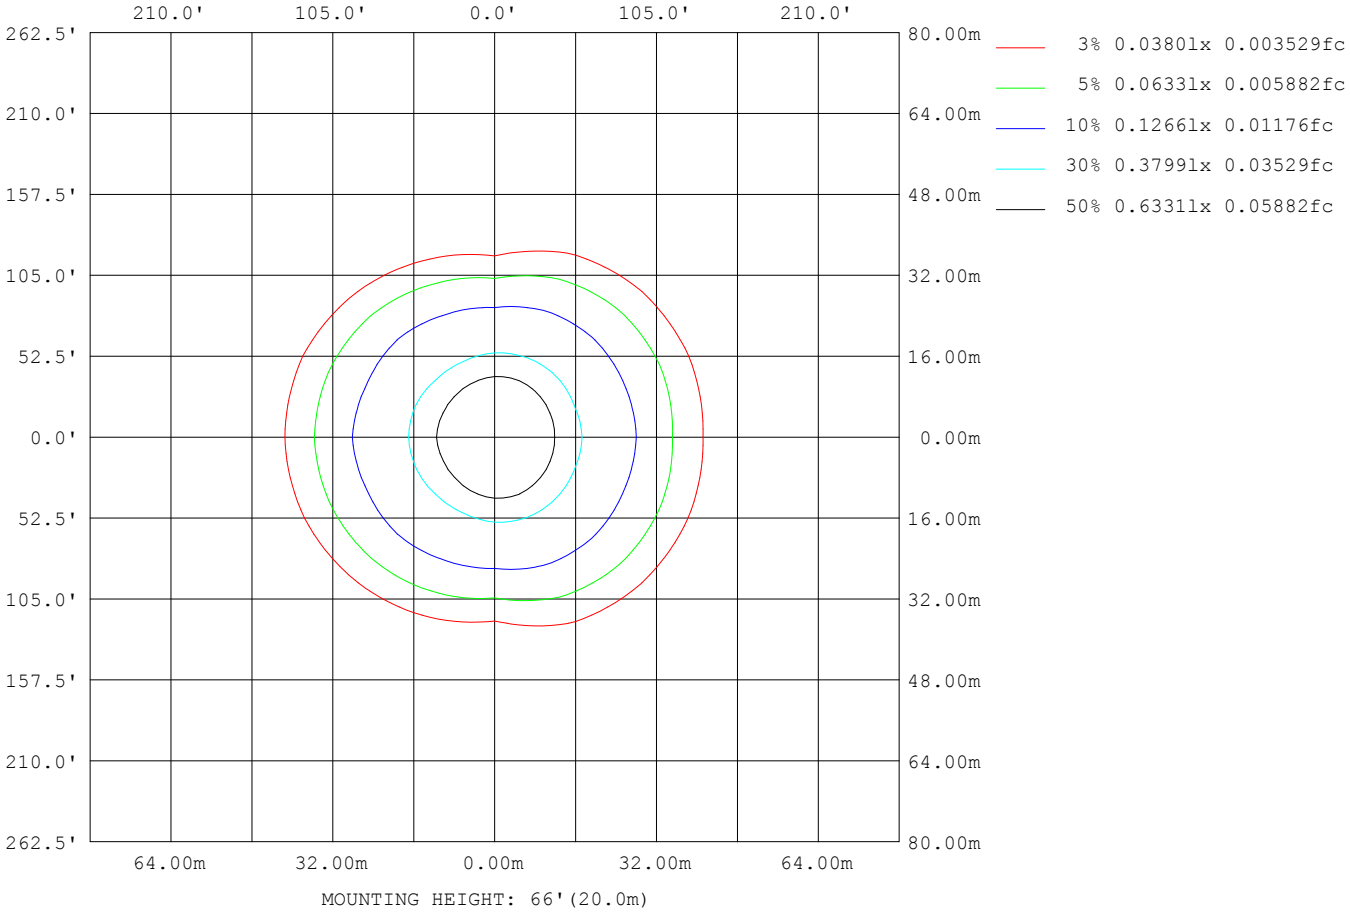

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:15 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:230.16V I:0.0578A P:12.925W PF:0.9695 Freq:59.98Hz Lamp Flux:1299.52x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	4148
L_0~180(75)av	3794
L_0~180(85)av	2986
L_90~270(65)av	2341
L_90~270(75)av	1265
L_90~270(85)av	2
L_45(65)av	3806
L_45(75)av	3295
L_45(85)av	2230

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:15 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

Planar Illuminance Curve

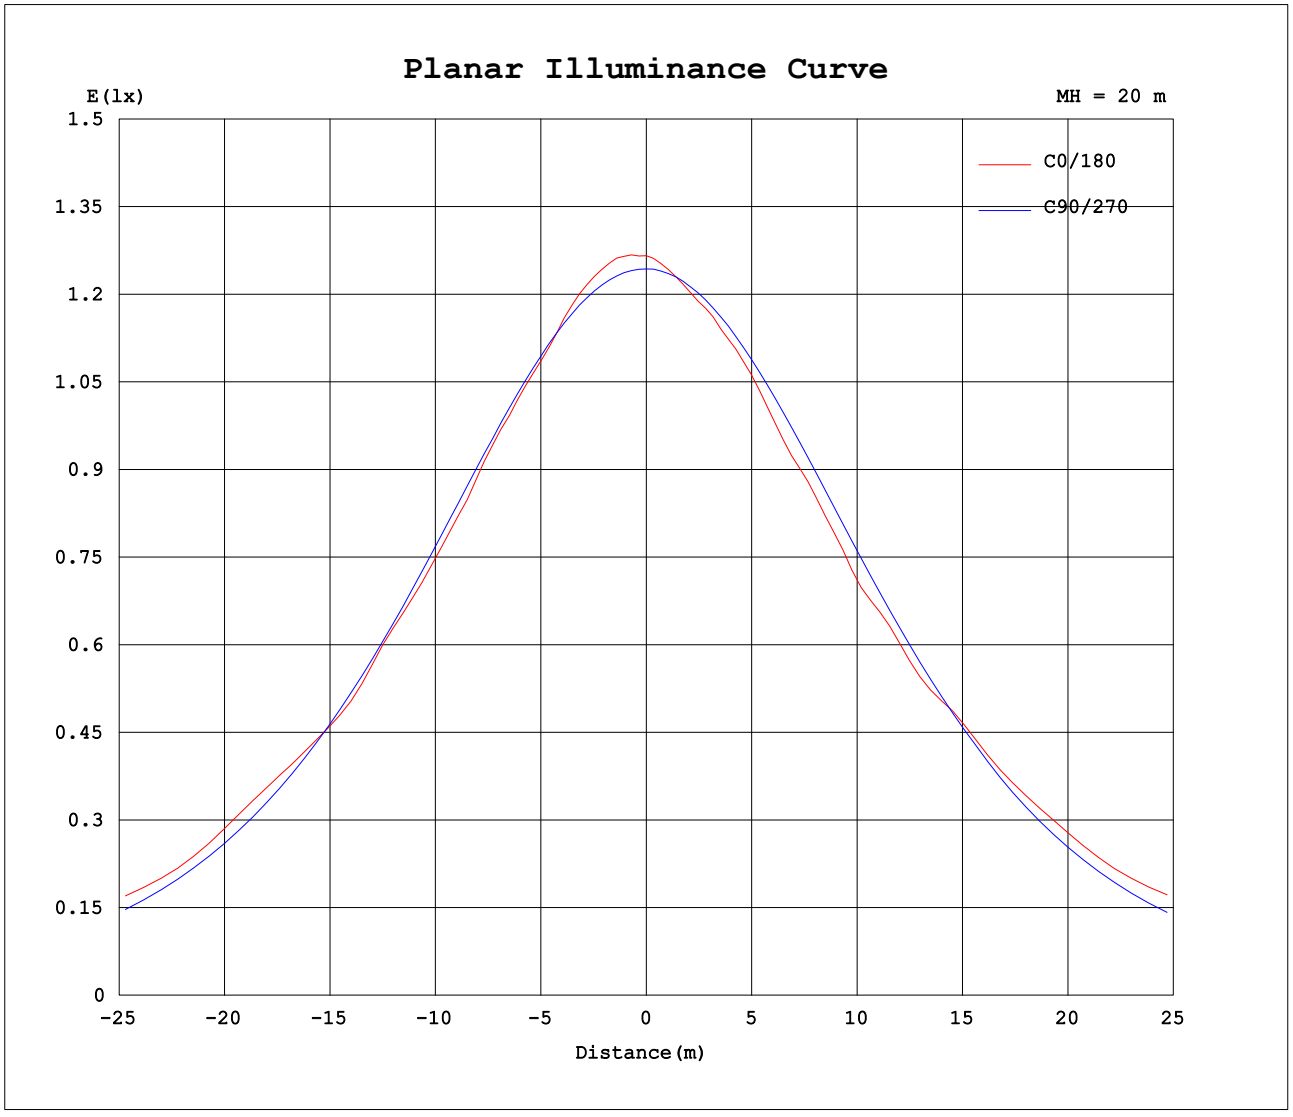

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:15 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.16V I:0.0578A P:12.925W PF:0.9695 Freq:59.98Hz Lamp Flux:1299.52x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5
0	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500	500
5	501	502	502	504	499	493	489	486	487	485	488	492	498	504	506	504
10	489	493	497	499	492	482	476	471	472	471	475	480	490	498	500	497
15	467	471	483	489	480	468	461	453	455	454	458	465	477	487	487	476
20	449	453	458	473	463	446	434	428	430	426	434	442	459	469	463	456
25	421	427	436	450	441	423	407	402	405	403	404	417	436	447	440	431
30	398	401	410	421	412	396	380	378	385	376	379	392	409	419	414	406
35	362	377	379	386	379	361	347	355	363	351	347	356	375	383	381	381
40	349	342	349	352	340	318	322	335	339	337	318	315	334	347	354	342
45	319	325	318	311	296	280	294	305	311	306	290	277	289	309	320	328
50	275	284	276	273	248	247	271	268	276	270	267	242	239	268	279	291
55	252	243	247	234	197	212	234	241	254	239	234	207	188	228	248	247
60	210	217	214	194	147	171	194	211	219	212	194	165	139	187	214	221
65	174	177	170	153	103	129	151	170	177	173	151	123	94.4	146	171	181
70	136	139	130	112	67.1	90.5	112	127	138	129	112	84.0	56.8	104	129	142
75	99.3	102	94.2	73.5	38.1	55.4	76.6	85.3	97.1	87.5	76.1	49.6	27.4	65.8	94.2	105
80	63.4	65.6	60.0	39.8	15.5	25.2	40.8	46.5	55.7	48.7	42.1	20.4	4.93	33.6	60.7	68.5
85	31.4	32.3	27.5	12.4	0.03	2.56	10.1	14.0	20.7	16.0	11.8	0.03	0.00	8.58	28.3	34.9
90	6.32	6.67	2.86	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.43	8.59
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:15 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks: