
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.0V I:0.1650A P:35.00W PF:0.9660 Freq:50.00Hz Lamp Flux:1999.46x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:TLS-S60HPXWS1200(N)-T34WWW8D-DC-WW	DIM.: 1200*45mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*45mm	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA		Eff: 57.13 lm/W	
MODEL		Imax(cd)	1567	S/MH(C0/180)	0.77
NOMINAL POWER(W)	34	LOR(%)	100.0	S/MH(C90/270)	0.95
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1999.5	h UP,DN(C0-180)	0.6,48.9
NOMINAL FLUX(lm)	1999.46	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.6,50.0
LAMPS INSIDE	1	h up(%)	1.2	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	220	h down(%)	98.8	CIBSE SHR MAX	0.95

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

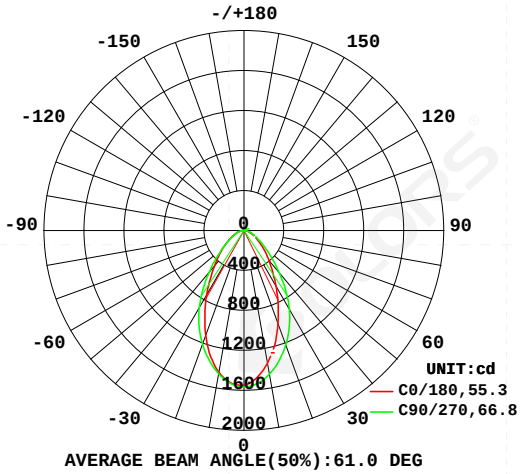

AVERAGE BEAM ANGLE(50%):61.0 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

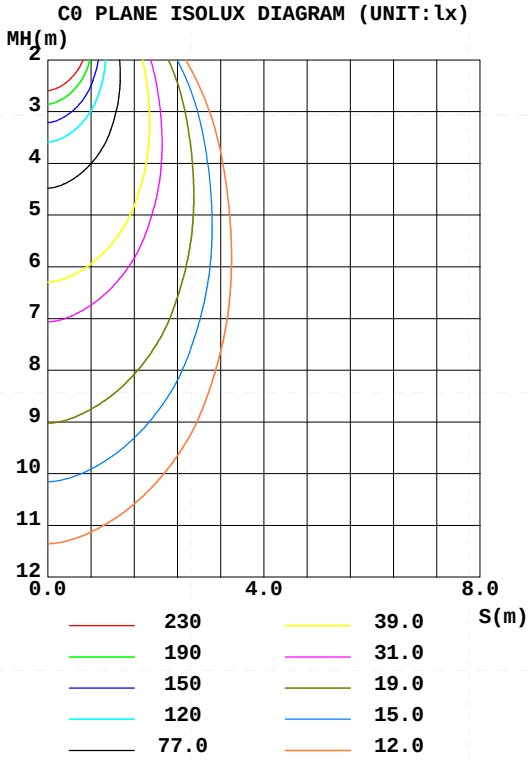

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	1350	1421	1462	1453	1443	1446	1457	1413	0- 10	142.6	142.6	7.13,7.13
20	994.6	1121	1221	1169	1120	1150	1213	1110	10- 20	362.0	504.6	25.2,25.2
30	641.4	758.4	909.3	812.0	751.0	791.8	898.0	751.8	20- 30	440.7	945.3	47.3,47.3
40	389.9	457.6	549.0	495.3	457.7	481.8	541.7	450.6	30- 40	389.7	1335	66.8,66.8
50	229.6	258.6	291.6	279.4	276.1	274.5	282.3	253.0	40- 50	280.2	1615	80.8,80.8
60	125.9	141.9	152.4	153.1	154.2	149.3	147.1	137.2	50- 60	178.9	1794	89.7,89.7
70	69.08	77.94	82.95	85.22	86.91	82.93	79.90	75.42	60- 70	109.0	1903	95.2,95.2
80	24.17	29.85	33.32	35.40	38.67	34.42	31.74	28.56	70- 80	58.06	1961	98.1,98.1
90	0.4208	0.6546	0.8888	0.7508	1.901	0.2914	0.1740	0.2691	80- 90	14.82	1976	98.8,98.8
100	0.7612	0.8025	0.8079	0.7214	0.4892	0.4921	0.5560	0.5410	90-100	0.5629	1976	98.9,98.9
110	1.356	1.317	1.383	1.089	0.9965	0.9284	1.290	1.055	100-110	0.9367	1977	98.9,98.9
120	2.302	2.209	2.450	1.731	1.644	1.569	2.245	1.876	110-120	1.541	1979	99,99
130	3.799	3.725	4.089	2.914	2.692	2.704	3.730	3.158	120-130	2.345	1981	99.1,99.1
140	6.045	5.725	6.535	4.781	4.291	4.589	6.062	5.108	130-140	3.313	1985	99.3,99.3
150	9.347	8.245	9.910	7.718	6.660	7.648	9.567	7.649	140-150	4.220	1989	99.5,99.5
160	13.57	11.50	14.48	12.03	10.04	12.06	14.11	11.44	150-160	4.702	1994	99.7,99.7
170	18.25	17.13	18.65	17.68	14.27	17.61	18.46	17.39	160-170	4.137	1998	99.9,99.9
180	18.21	21.19	21.43	21.25	18.15	21.16	21.45	21.25	170-180	1.794	1999	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03


g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.0V I:0.1650A P:35.00W PF:0.9660 Freq:50.00Hz Lamp Flux:1999.46x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:TLS-S60HPXWS1200(N)-T34WWW8D-DC-WW	DIM.: 1200*45mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*45mm	Shielding Angle:

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

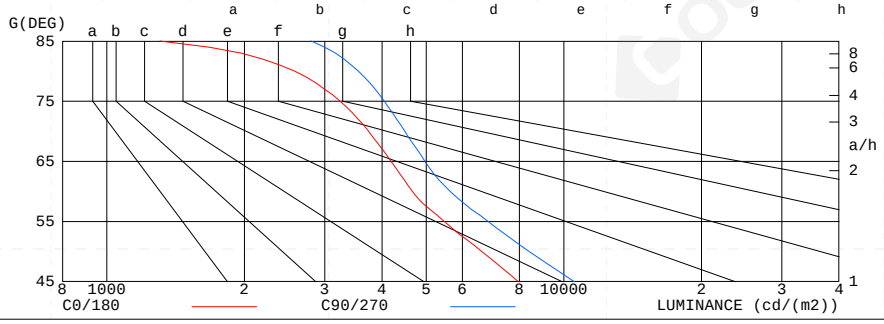

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	1307	2802
80	2577	3554
75	3240	4047
70	3740	4491
65	4188	4968
60	4662	5646
55	5484	6840
50	6615	8401
45	7953	10545

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:


CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.0V I:0.1650A P:35.00W PF:0.9660 Freq:50.00Hz Lamp Flux:1999.46x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:TLS-S60HPXWS1200(N)-T34WWW8D-DC-WW	DIM.: 1200*45mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*45mm	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.93	.91	.90	.88
2.0	.97	.91	.87	.95	.90	.86	.91	.87	.84	.88	.85	.82	.85	.82	.80	.78
3.0	.88	.81	.76	.86	.80	.75	.83	.78	.74	.80	.76	.73	.78	.74	.71	.69
4.0	.80	.73	.67	.79	.72	.67	.76	.70	.66	.74	.69	.65	.72	.68	.64	.62
5.0	.73	.66	.60	.72	.65	.60	.70	.64	.59	.68	.63	.59	.66	.62	.58	.56
6.0	.67	.60	.55	.67	.60	.54	.65	.59	.54	.63	.58	.53	.62	.57	.53	.51
7.0	.62	.55	.50	.62	.55	.50	.60	.54	.49	.59	.53	.49	.57	.52	.48	.47
8.0	.58	.51	.46	.57	.50	.46	.56	.50	.45	.55	.49	.45	.54	.48	.45	.43
9.0	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.46	.42	.50	.45	.41	.40
10.0	.51	.44	.39	.50	.43	.39	.49	.43	.39	.48	.43	.39	.47	.42	.38	.37

LAMPS

LUMINAIRE BUDGETARY DIAGRAM

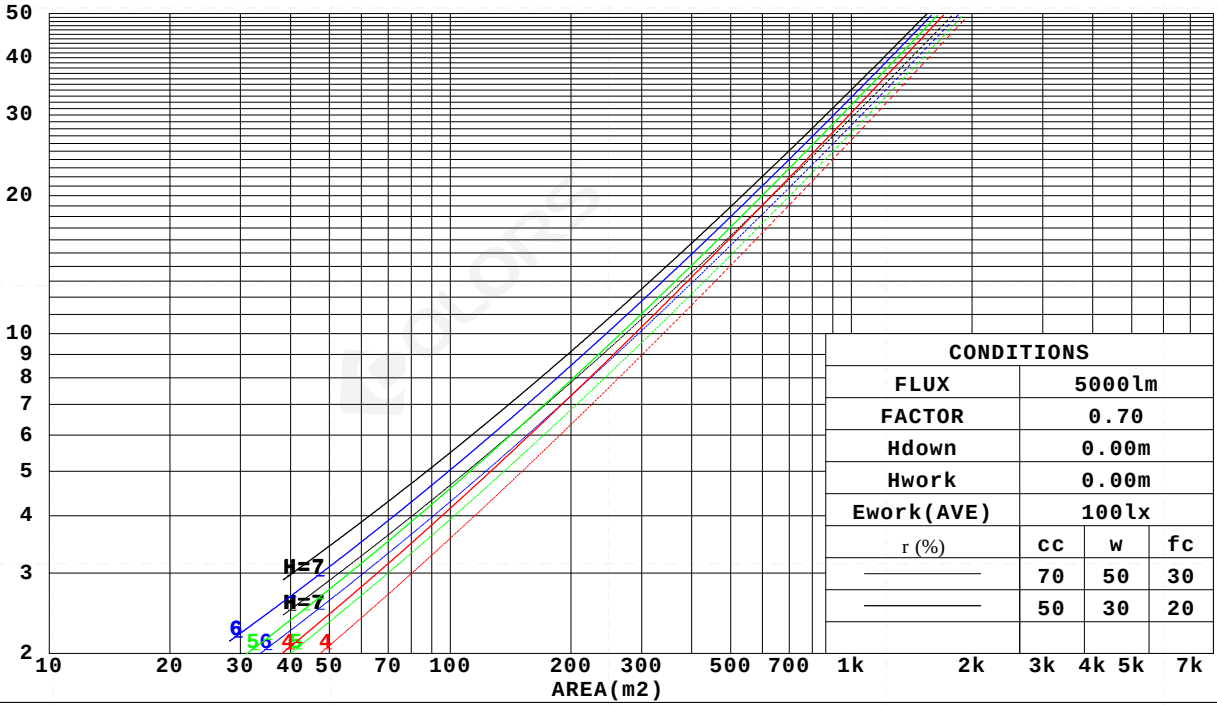

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.0V I:0.1650A P:35.00W PF:0.9660 Freq:50.00Hz Lamp Flux:1999.46x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:ᴛLS-S60HPXWS1200(N)-T34WWW8D-DC-WW	DIM.: 1200*45mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*45mm	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Wall Exitance Coeffcients(WEC)												
0.0																
1.0	.239	.136	.043	.231	.132	.042	.218	.125	.040	.205	.118	.038	.194	.112	.036	
2.0	.228	.125	.038	.221	.122	.038	.210	.117	.036	.199	.112	.035	.189	.107	.034	
3.0	.214	.114	.034	.209	.112	.034	.198	.108	.033	.189	.104	.032	.180	.100	.031	
4.0	.201	.104	.031	.196	.103	.030	.187	.099	.030	.179	.096	.029	.171	.093	.028	
5.0	.189	.096	.028	.184	.095	.028	.176	.092	.027	.169	.089	.027	.162	.087	.026	
6.0	.177	.089	.025	.173	.088	.025	.166	.085	.025	.160	.083	.024	.154	.081	.024	
7.0	.167	.083	.023	.164	.082	.023	.157	.080	.023	.151	.078	.023	.146	.076	.022	
8.0	.158	.077	.022	.155	.076	.022	.149	.074	.021	.144	.073	.021	.139	.071	.021	
9.0	.149	.072	.020	.147	.071	.020	.141	.070	.020	.137	.068	.020	.132	.067	.019	
10.0	.142	.068	.019	.139	.067	.019	.135	.066	.019	.130	.065	.018	.126	.063	.018	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.199	.199	.199	.170	.170	.170	.116	.116	.116	.067	.067	.067	.021	.021	.021	
1.0	.184	.166	.149	.158	.142	.128	.108	.098	.089	.062	.057	.052	.020	.018	.017	
2.0	.173	.141	.115	.148	.122	.099	.101	.084	.069	.058	.049	.041	.019	.016	.013	
3.0	.163	.123	.091	.140	.106	.079	.096	.074	.056	.055	.043	.033	.018	.014	.011	
4.0	.154	.109	.075	.132	.094	.065	.091	.066	.046	.053	.038	.027	.017	.013	.009	
5.0	.146	.098	.063	.126	.085	.054	.087	.059	.038	.050	.035	.023	.016	.011	.008	
6.0	.139	.089	.054	.120	.077	.047	.083	.054	.033	.048	.032	.020	.015	.010	.006	
7.0	.133	.082	.047	.114	.071	.041	.079	.050	.029	.046	.029	.017	.015	.010	.006	
8.0	.127	.076	.042	.109	.066	.036	.075	.046	.026	.044	.027	.015	.014	.009	.005	
9.0	.121	.071	.037	.104	.062	.033	.072	.043	.023	.042	.026	.014	.014	.008	.005	
10.0	.116	.067	.034	.100	.058	.030	.069	.041	.021	.041	.024	.013	.013	.008	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.0V I:0.1650A P:35.00W PF:0.9660 Freq:50.00Hz Lamp Flux:1999.46x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:TLS-S60HPXWS1200(N)-T34WWW8D-DC-WW	DIM.: 1200*45mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*45mm	Shielding Angle:

ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	14.8	16.0	15.1	16.2	16.4	15.8	17.0	16.1	17.2	17.4
	3H	15.6	16.7	15.9	16.9	17.2	16.5	17.7	16.8	17.9	18.1
	4H	15.9	16.9	16.2	17.2	17.4	16.8	17.9	17.2	18.2	18.4
	6H	16.0	17.0	16.4	17.3	17.6	17.1	18.1	17.4	18.4	18.6
	8H	16.1	17.0	16.4	17.3	17.6	17.1	18.1	17.5	18.4	18.7
	12H	16.0	17.0	16.4	17.3	17.6	17.2	18.1	17.5	18.4	18.7
4H	2H	15.2	16.2	15.5	16.5	16.7	16.0	17.1	16.3	17.3	17.6
	3H	16.1	17.0	16.5	17.4	17.7	16.9	17.9	17.3	18.2	18.5
	4H	16.5	17.4	16.9	17.7	18.0	17.4	18.2	17.8	18.5	18.9
	6H	16.8	17.5	17.2	17.9	18.3	17.7	18.5	18.1	18.8	19.2
	8H	16.9	17.5	17.3	17.9	18.3	17.8	18.5	18.2	18.9	19.3
	12H	16.9	17.5	17.3	17.9	18.3	17.9	18.5	18.3	18.9	19.3
8H	4H	16.7	17.4	17.1	17.8	18.2	17.5	18.2	17.9	18.5	18.9
	6H	17.1	17.6	17.5	18.1	18.5	17.9	18.5	18.4	18.9	19.3
	8H	17.2	17.7	17.7	18.1	18.6	18.1	18.6	18.6	19.0	19.5
	12H	17.2	17.6	17.7	18.1	18.6	18.2	18.6	18.7	19.1	19.6
12H	4H	16.7	17.3	17.1	17.7	18.1	17.5	18.1	17.9	18.5	18.9
	6H	17.1	17.6	17.6	18.0	18.5	17.9	18.4	18.4	18.9	19.3
	8H	17.2	17.7	17.7	18.1	18.6	18.1	18.5	18.6	19.0	19.5
Variations with the observer position at spacings:											
S = 1.0H		+ 0.5 / - 0.6					+ 0.5 / - 0.6				
1.5H		+ 0.3 / - 0.5					+ 0.7 / - 0.4				
2.0H		+ 0.9 / - 0.9					+ 1.2 / - 0.7				

CIE Pub.117, 1999 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.4)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.0V I:0.1650A P:35.00W PF:0.9660 Freq:50.00Hz Lamp Flux:1999.46x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:TLS-S60HPXWS1200(N)-T34WWW8D-DC-WW	DIM.: 1200*45mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*45mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	71	62	56	70	61	56	69	61	56	51
0.80	80	71	65	79	71	65	77	70	65	59
1.00	87	78	73	86	78	73	84	78	72	66
1.25	93	85	79	91	84	79	89	83	78	72
1.50	97	89	84	95	88	84	92	87	82	76
2.00	102	95	90	100	94	90	97	92	88	81
2.50	104	99	94	102	97	93	99	94	91	84
3.00	107	102	98	105	100	96	101	97	94	86
4.00	110	106	102	107	104	101	103	100	98	89
5.00	112	108	105	109	106	103	105	102	100	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.0V I:0.1650A P:35.00W PF:0.9660 Freq:50.00Hz Lamp Flux:1999.46x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:TLS-S60HPXWS1200(N)-T34WWW8D-DC-WW	DIM.: 1200*45mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*45mm	Shielding Angle:

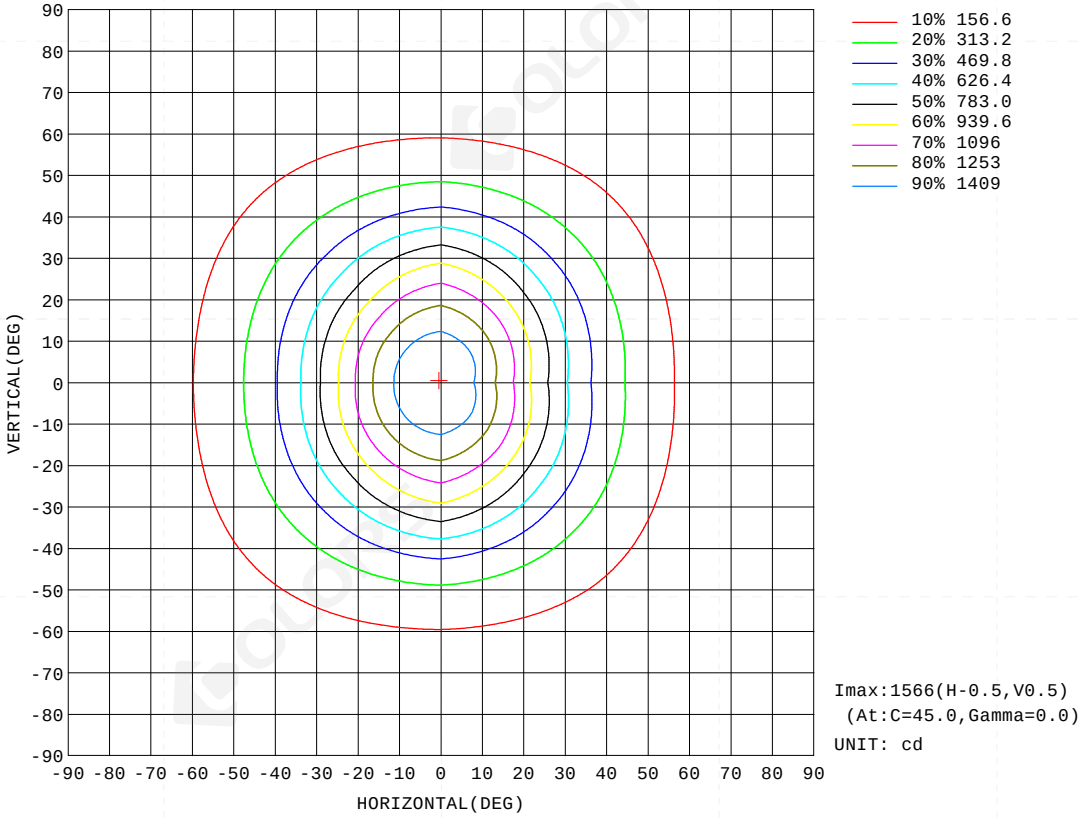


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.0V I:0.1650A P:35.00W PF:0.9660 Freq:50.00Hz Lamp Flux:1999.46x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:TLS-S60HPXWS1200(N)-T34WWW8D-DC-WW	DIM.: 1200*45mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*45mm	Shielding Angle:

Flux out:857.8 lm

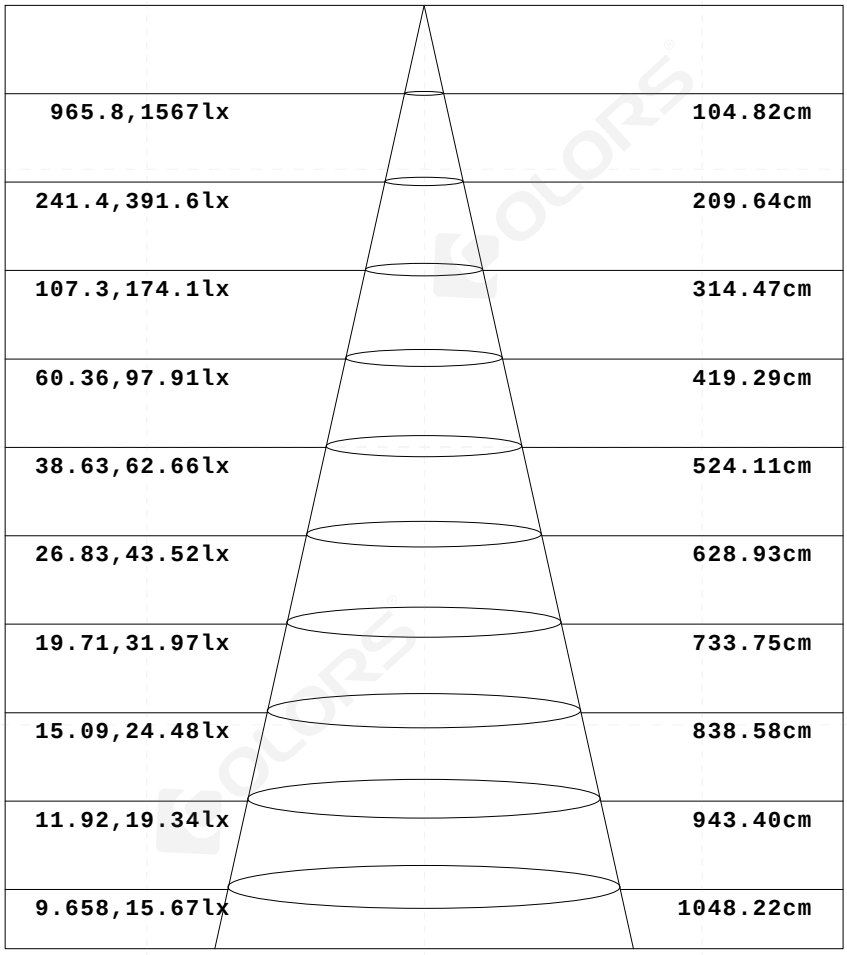


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.0V I:0.1650A P:35.00W PF:0.9660 Freq:50.00Hz Lamp Flux:1999.46x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:TLS-S60HPXWS1200(N)-T34WWW8D-DC-WW	DIM.: 1200*45mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*45mm	Shielding Angle:

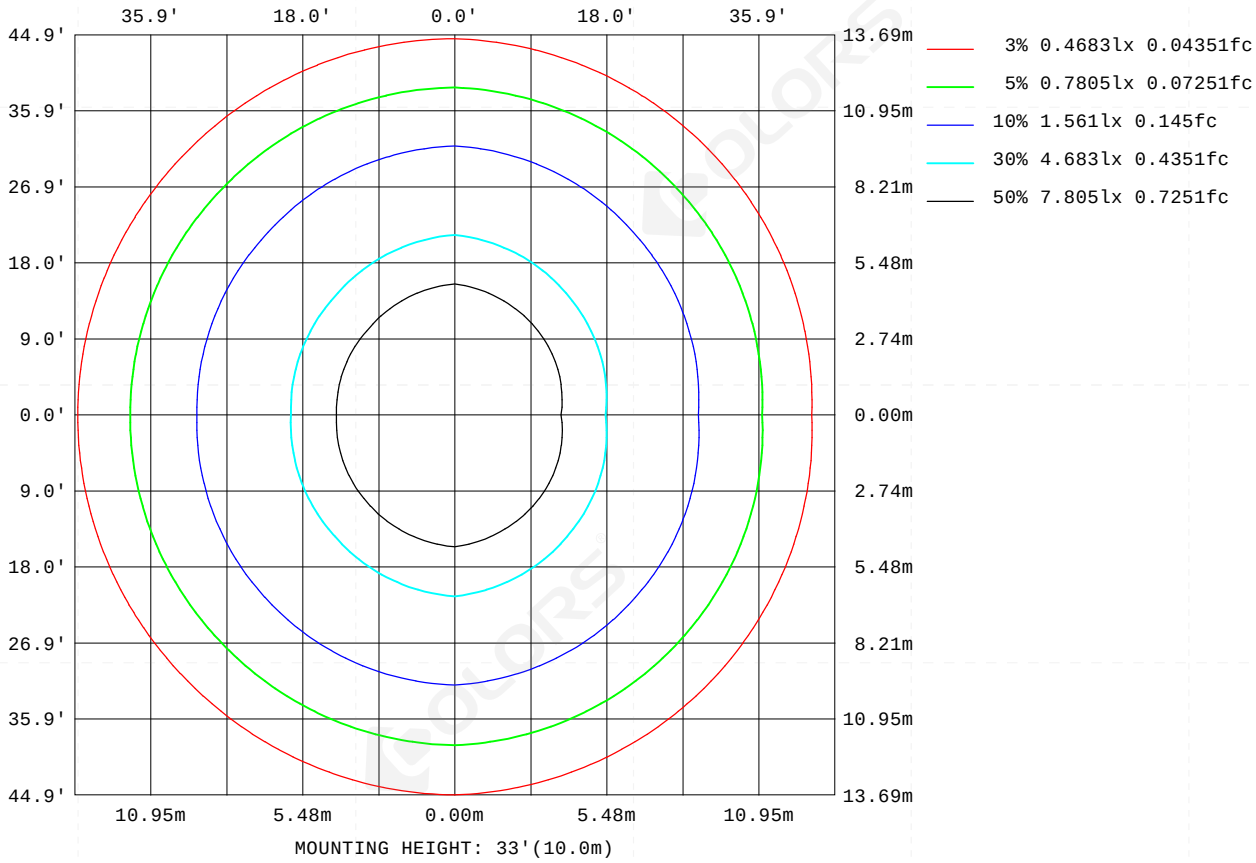

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.0V I:0.1650A P:35.00W PF:0.9660 Freq:50.00Hz Lamp Flux:1999.46x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.TLS-S60HPXWS1200(N)-T34WWW8D-DC-WW	DIM.: 1200*45mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*45mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	4628
L_0~180(75)av	3820
L_0~180(85)av	2618
L_90~270(65)av	4879
L_90~270(75)av	3968
L_90~270(85)av	2683
L_45(65)av	4810
L_45(75)av	3915
L_45(85)av	2654

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

Planar Illuminance Curve

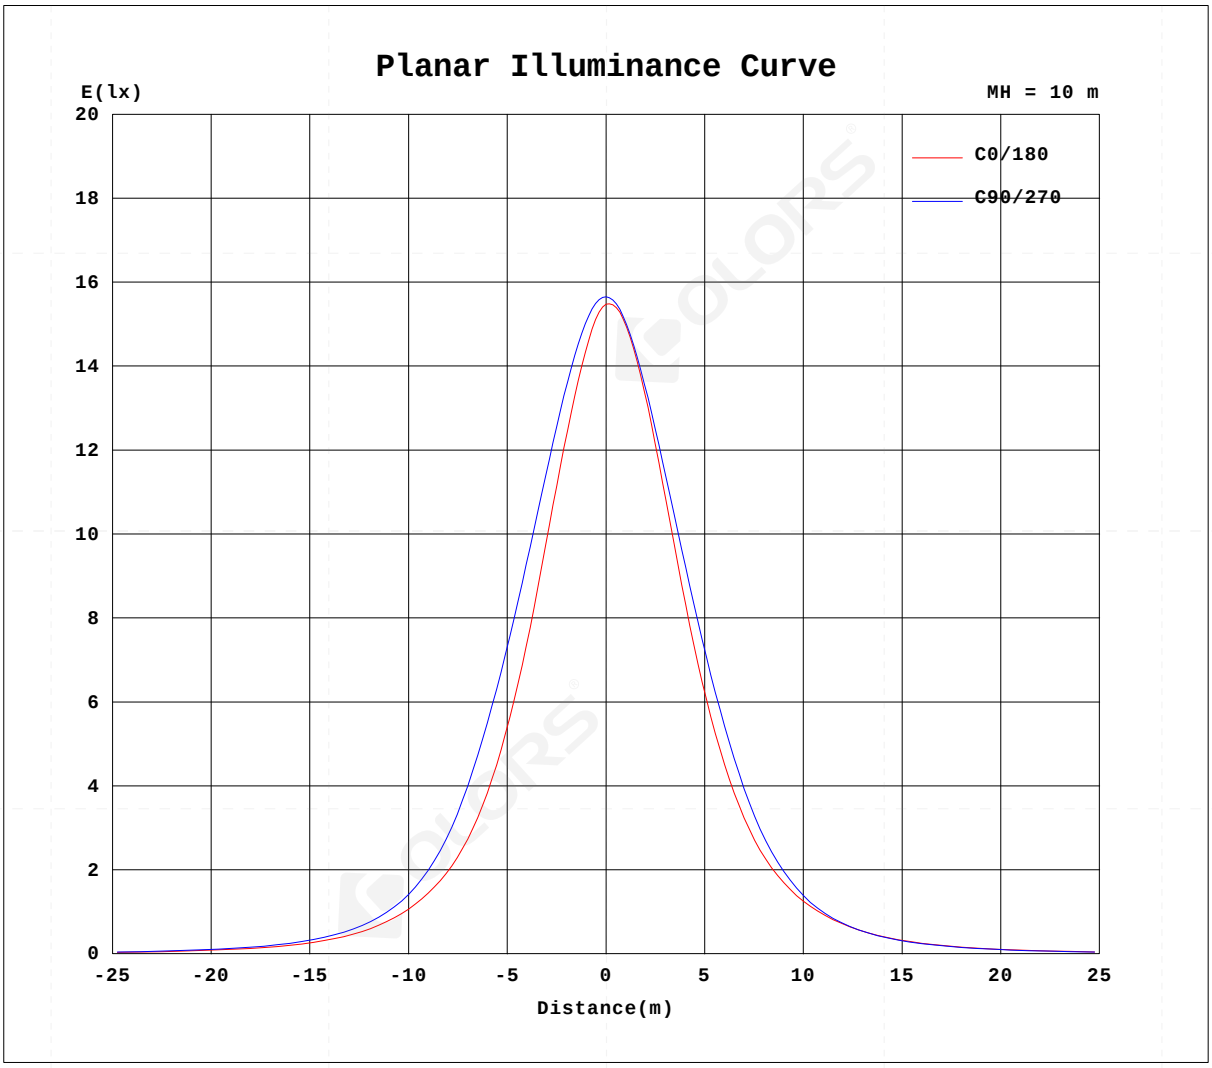

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.0V I:0.1650A P:35.00W PF:0.9660 Freq:50.00Hz Lamp Flux:1999.46x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:TLS-S60HPXWS1200(N)-T34WWW8D-DC-WW	DIM.: 1200*45mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*45mm	Shielding Angle:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	45	90	135	180	225	270	315											
0	1548	1567	1565	1564	1548	1567	1565	1564											
5	1480	1526	1539	1539	1531	1537	1537	1520											
10	1350	1421	1462	1453	1443	1446	1457	1413											
15	1187	1281	1352	1326	1299	1313	1346	1273											
20	995	1121	1221	1169	1120	1150	1213	1110											
25	811	936	1072	990	929	969	1063	930											
30	641	758	909	812	751	792	898	752											
35	499	595	729	643	590	625	717	589											
40	390	458	549	495	458	482	542	451											
45	304	345	403	373	356	366	395	341											
50	230	259	292	279	276	275	282	253											
55	170	192	212	207	207	204	203	186											
60	126	142	152	153	154	149	147	137											
65	95.6	107	113	116	116	113	109	104											
70	69.1	77.9	82.9	85.2	86.9	82.9	79.9	75.4											
75	45.3	52.4	56.6	58.7	61.5	57.1	54.4	50.6											
80	24.2	29.8	33.3	35.4	38.7	34.4	31.7	28.6											
85	6.15	10.6	13.2	15.2	18.5	14.5	12.1	9.69											
90	0.42	0.65	0.89	0.75	1.90	0.29	0.17	0.27											
95	0.55	0.68	0.80	0.62	0.27	0.29	0.33	0.32											
100	0.76	0.80	0.81	0.72	0.49	0.49	0.56	0.54											
105	1.05	1.00	1.02	0.86	0.73	0.66	0.89	0.79											
110	1.36	1.32	1.38	1.09	1.00	0.93	1.29	1.06											
115	1.76	1.70	1.87	1.37	1.30	1.18	1.73	1.43											
120	2.30	2.21	2.45	1.73	1.64	1.57	2.24	1.88											
125	2.97	2.91	3.15	2.26	2.11	2.04	2.91	2.46											
130	3.80	3.73	4.09	2.91	2.69	2.70	3.73	3.16											
135	4.79	4.68	5.21	3.75	3.42	3.51	4.79	4.03											
140	6.05	5.72	6.53	4.78	4.29	4.59	6.06	5.11											
145	7.61	6.91	8.06	6.09	5.37	5.95	7.61	6.32											
150	9.35	8.24	9.91	7.72	6.66	7.65	9.57	7.65											
155	11.4	9.73	12.2	9.68	8.22	9.69	11.8	9.28											
160	13.6	11.5	14.5	12.0	10.0	12.1	14.1	11.4											
165	16.0	14.0	16.7	14.8	12.0	14.7	16.3	14.3											
170	18.2	17.1	18.7	17.7	14.3	17.6	18.5	17.4											
175	19.1	19.6	20.4	20.3	15.7	20.3	20.3	19.9											
180	18.2	21.2	21.4	21.2	18.2	21.2	21.5	21.3											

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks: