
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.0V I:0.1240A P:26.60W PF:0.9770 Freq:50.00Hz Lamp Flux:3192.42x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:TLS-S60LAXWS1200(N)-T28WWW8D-DC-WW	DIM.: 1200*20*23mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*20mm	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA Eff: 120.02 lm/W			
MODEL		Imax(cd)	2045	S/MH(C0/180)	0.49
NOMINAL POWER(W)	28	LOR(%)	100.0	S/MH(C90/270)	1.21
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	3192.4	h UP,DN(C0-180)	0.8,45.5
NOMINAL FLUX(lm)	3192.42	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.6,53.1
LAMPS INSIDE	1	h up(%)	1.4	CIBSE SHR NOM	1.00
TEST VOLTAGE(V)	220	h down(%)	98.6	CIBSE SHR MAX	1.00

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

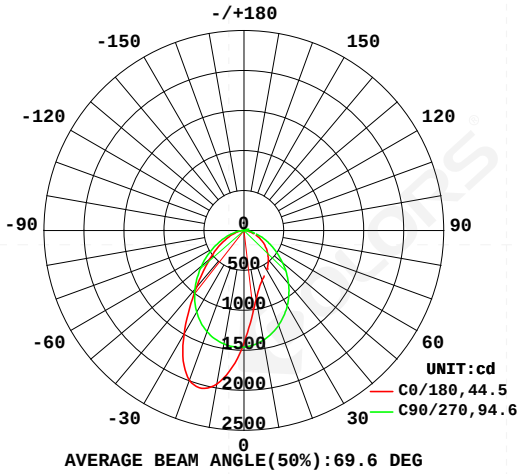

AVERAGE BEAM ANGLE(50%):69.6 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

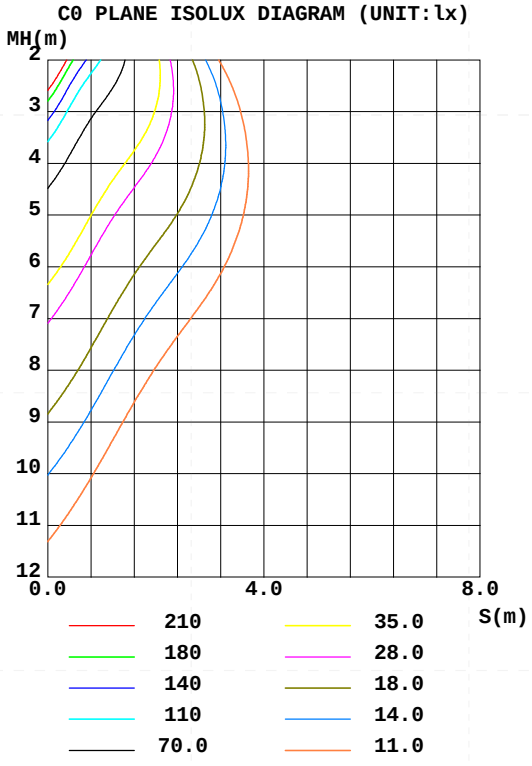

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	877.6	1007	1394	1797	1947	1844	1441	1010	0- 10	136.2	136.2	4.26,4.26
20	666.5	733.9	1265	1892	1994	1932	1349	741.4	10- 20	388.8	524.9	16.4,16.4
30	571.7	591.9	1086	1697	1503	1702	1183	595.3	20- 30	565.3	1090	34.2,34.2
40	476.9	483.1	869.6	1323	925.2	1286	954.5	484.2	30- 40	614.9	1705	53.4,53.4
50	371.1	371.2	635.1	901.2	564.4	842.4	697.7	372.6	40- 50	554.8	2260	70.8,70.8
60	262.3	260.3	411.6	543.8	328.7	501.8	451.0	264.7	50- 60	431.1	2691	84.3,84.3
70	144.4	152.3	227.9	278.7	162.7	256.1	238.6	156.1	60- 70	283.6	2975	93.2,93.2
80	49.17	55.70	83.08	93.80	61.07	81.23	87.56	55.21	70- 80	139.2	3114	97.5,97.5
90	0.9837	3.571	7.032	4.191	0.6181	3.152	5.117	3.627	80- 90	33.35	3147	98.6,98.6
100	1.634	4.164	6.760	3.521	1.036	3.478	6.403	4.656	90-100	4.014	3151	98.7,98.7
110	3.131	5.975	3.922	3.948	2.114	3.833	3.187	6.375	100-110	3.904	3155	98.8,98.8
120	5.303	8.759	6.325	4.610	3.049	4.428	5.265	8.776	110-120	4.869	3160	99,99
130	8.475	10.98	8.736	5.333	3.995	5.123	7.459	11.02	120-130	6.024	3166	99.2,99.2
140	13.16	14.46	10.93	6.206	4.958	6.156	9.585	13.43	130-140	6.749	3173	99.4,99.4
150	19.22	17.13	13.06	7.551	5.952	7.566	12.05	15.76	140-150	6.908	3180	99.6,99.6
160	23.59	18.95	16.13	9.922	7.617	9.929	15.17	19.06	150-160	6.277	3186	99.8,99.8
170	23.86	21.62	18.51	14.47	11.26	14.20	17.98	21.86	160-170	4.630	3191	99.9,99.9
180	17.42	20.06	20.10	20.29	17.40	20.06	20.06	20.31	170-180	1.774	3192	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03


g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.0V I:0.1240A P:26.60W PF:0.9770 Freq:50.00Hz Lamp Flux:3192.42x1 lm		
NAME: LLS-M60LAXWS1200(N)	TYPE:	WEIGHT:
SPEC.:LLS-M60LAXWS1200(N)-T28WWW8D-DC-WW	DIM.: 1200*20*23mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*20mm	Shielding Angle:

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

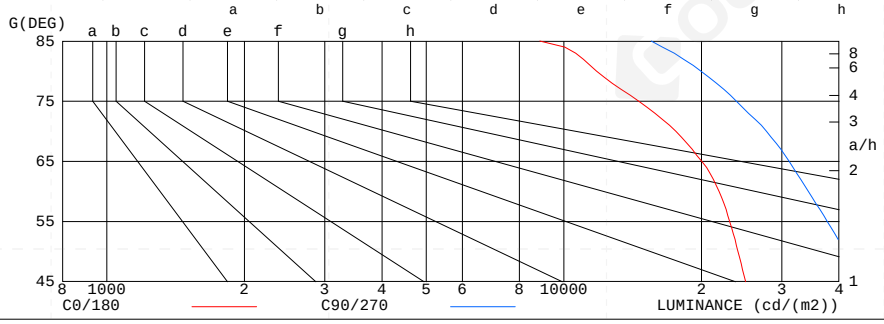

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	8869	15524
80	11799	19935
75	14599	23843
70	17594	27764
65	20048	31114
60	21856	34298
55	23067	37742
50	24056	41168
45	25009	44393


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.0V I:0.1240A P:26.60W PF:0.9770 Freq:50.00Hz Lamp Flux:3192.42x1 lm		
NAME: LLS-M60LAXWS1200(N)	TYPE:	WEIGHT:
SPEC.:LLS-M60LAXWS1200(N)-T28WWW8D-DC-WW	DIM.: 1200*20*23mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*20mm	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.05	1.02	.98	1.03	.00	.97	.99	.96	.93	.95	.92	.90	.91	.89	.87	.85
2.0	.93	.87	.82	.91	.86	.81	.88	.83	.79	.84	.80	.77	.81	.78	.75	.73
3.0	.83	.76	.70	.81	.75	.69	.78	.72	.68	.75	.70	.66	.73	.69	.65	.63
4.0	.74	.66	.60	.73	.65	.60	.70	.64	.59	.68	.62	.58	.66	.61	.57	.55
5.0	.67	.59	.53	.66	.58	.52	.64	.57	.52	.62	.56	.51	.60	.54	.50	.48
6.0	.61	.53	.47	.60	.52	.46	.58	.51	.46	.56	.50	.45	.55	.49	.45	.43
7.0	.56	.47	.42	.55	.47	.41	.53	.46	.41	.52	.45	.41	.50	.45	.40	.38
8.0	.51	.43	.37	.50	.43	.37	.49	.42	.37	.48	.41	.37	.46	.41	.36	.35
9.0	.47	.39	.34	.46	.39	.34	.45	.38	.34	.44	.38	.33	.43	.37	.33	.31
10.0	.44	.36	.31	.43	.36	.31	.42	.35	.31	.41	.35	.31	.40	.34	.30	.29

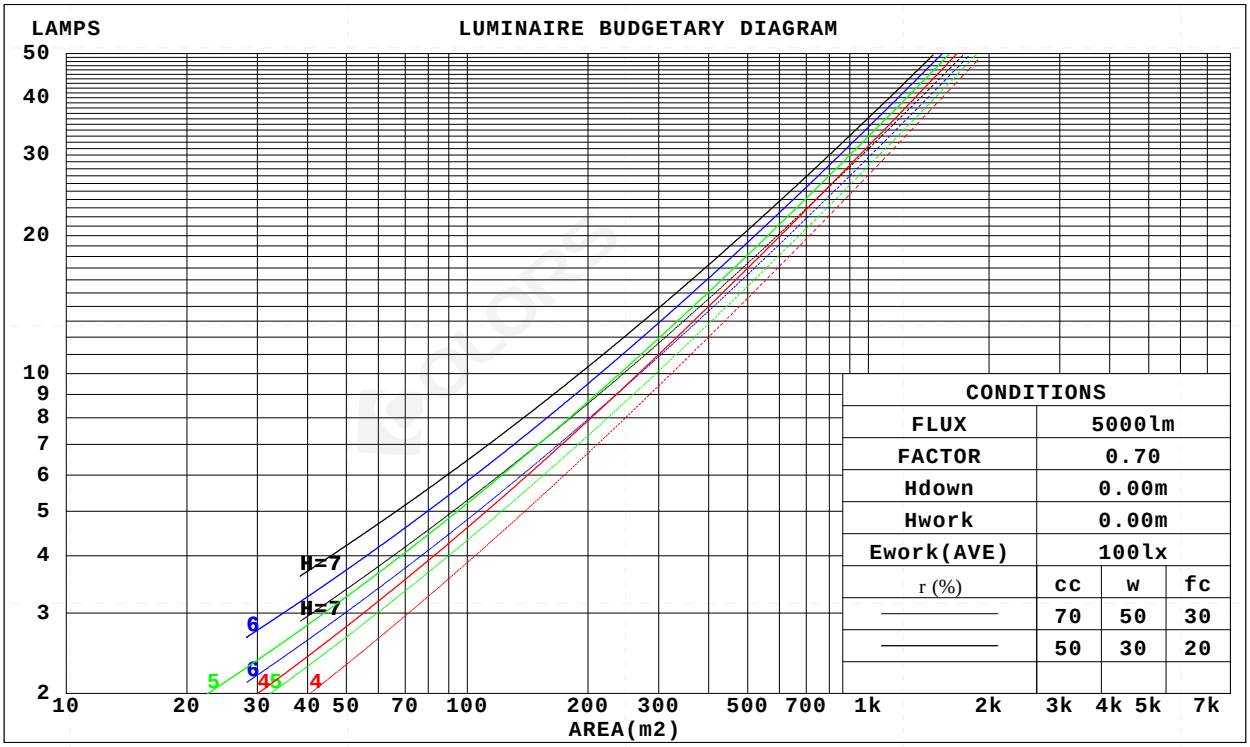

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.0V I:0.1240A P:26.60W PF:0.9770 Freq:50.00Hz Lamp Flux:3192.42x1 lm		
NAME: LLS-M60LAXWS1200(N)	TYPE:	WEIGHT:
SPEC.:LLS-M60LAXWS1200(N)-T28WWW8D-DC-WW	DIM.: 1200*20*23mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*20mm	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Wall Exitance Coeffcients(WEC)												
0.0																
1.0	.273	.155	.049	.266	.151	.048	.252	.144	.046	.239	.138	.044	.227	.132	.042	
2.0	.261	.143	.044	.254	.140	.043	.242	.135	.042	.231	.129	.041	.220	.125	.039	
3.0	.244	.130	.039	.238	.128	.038	.228	.123	.037	.218	.119	.037	.209	.115	.036	
4.0	.228	.118	.035	.223	.116	.034	.213	.113	.034	.204	.110	.033	.196	.107	.032	
5.0	.212	.108	.031	.208	.107	.031	.199	.104	.031	.191	.101	.030	.184	.098	.030	
6.0	.198	.099	.028	.194	.098	.028	.187	.096	.028	.180	.093	.027	.173	.091	.027	
7.0	.186	.092	.026	.182	.091	.026	.175	.089	.026	.169	.087	.025	.163	.085	.025	
8.0	.174	.085	.024	.171	.084	.024	.165	.083	.024	.159	.081	.023	.154	.079	.023	
9.0	.164	.079	.022	.161	.079	.022	.156	.077	.022	.151	.076	.022	.146	.074	.021	
10.0	.155	.074	.021	.153	.074	.021	.148	.072	.020	.143	.071	.020	.138	.070	.020	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.201	.201	.201	.172	.172	.172	.117	.117	.117	.067	.067	.067	.022	.022	.022	
1.0	.189	.167	.148	.161	.144	.128	.110	.099	.088	.064	.057	.051	.020	.018	.017	
2.0	.179	.143	.113	.153	.123	.097	.105	.085	.068	.061	.050	.040	.019	.016	.013	
3.0	.170	.125	.089	.146	.108	.077	.100	.075	.054	.058	.044	.032	.019	.014	.010	
4.0	.163	.112	.073	.140	.096	.063	.096	.067	.044	.055	.039	.026	.018	.013	.009	
5.0	.155	.101	.061	.133	.087	.053	.092	.061	.037	.053	.036	.022	.017	.012	.007	
6.0	.148	.092	.052	.127	.080	.046	.088	.056	.032	.051	.033	.019	.016	.011	.006	
7.0	.142	.085	.046	.122	.074	.040	.084	.052	.028	.049	.031	.017	.016	.010	.006	
8.0	.136	.080	.041	.117	.069	.036	.081	.049	.026	.047	.029	.015	.015	.009	.005	
9.0	.130	.075	.038	.112	.065	.033	.077	.046	.023	.045	.027	.014	.015	.009	.005	
10.0	.124	.070	.035	.107	.061	.030	.074	.043	.021	.043	.025	.013	.014	.008	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.0V I:0.1240A P:26.60W PF:0.9770 Freq:50.00Hz Lamp Flux:3192.42x1 lm		
NAME: LLS-M60LAXWS1200(N)	TYPE:	WEIGHT:
SPEC.:LLS-M60LAXWS1200(N)-T28WWW8D-DC-WW	DIM.: 1200*20*23mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*20mm	Shielding Angle:

ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	17.7	19.0	17.9	19.3	19.5	19.9	21.3	20.2	21.5	21.7
	3H	18.9	20.2	19.2	20.4	20.7	21.2	22.5	21.5	22.7	23.0
	4H	19.3	20.5	19.6	20.8	21.1	21.7	22.9	22.0	23.2	23.4
	6H	19.5	20.7	19.9	21.0	21.3	22.0	23.1	22.4	23.4	23.7
	8H	19.6	20.7	20.0	21.0	21.3	22.1	23.2	22.5	23.5	23.8
	12H	19.6	20.7	20.0	21.0	21.3	22.1	23.2	22.5	23.5	23.8
4H	2H	18.3	19.5	18.6	19.7	20.0	20.1	21.3	20.4	21.6	21.8
	3H	19.7	20.7	20.0	21.0	21.4	21.6	22.6	22.0	23.0	23.3
	4H	20.2	21.1	20.6	21.5	21.8	22.2	23.2	22.6	23.5	23.8
	6H	20.5	21.3	20.9	21.7	22.1	22.6	23.5	23.0	23.8	24.2
	8H	20.6	21.4	21.0	21.8	22.2	22.8	23.6	23.2	23.9	24.4
	12H	20.7	21.4	21.1	21.8	22.2	22.9	23.6	23.3	24.0	24.4
8H	4H	20.4	21.2	20.8	21.6	22.0	22.3	23.0	22.7	23.4	23.8
	6H	20.9	21.5	21.3	21.9	22.4	22.8	23.4	23.3	23.9	24.3
	8H	21.0	21.6	21.5	22.0	22.5	23.0	23.6	23.5	24.0	24.5
	12H	21.1	21.6	21.6	22.1	22.6	23.1	23.6	23.6	24.1	24.6
12H	4H	20.4	21.1	20.9	21.5	22.0	22.2	23.0	22.7	23.4	23.8
	6H	20.9	21.5	21.4	21.9	22.4	22.8	23.4	23.3	23.8	24.3
	8H	21.1	21.6	21.6	22.0	22.5	23.0	23.5	23.5	24.0	24.5
Variations with the observer position at spacings:											
S = 1.0H		+ 0.2 / - 0.3					+ 0.2 / - 0.2				
1.5H		+ 0.1 / - 0.3					+ 0.4 / - 0.5				
2.0H		+ 0.3 / - 0.3					+ 0.9 / - 0.1.0				

CIE Pub.117, 3192 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 4.0)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.0V I:0.1240A P:26.60W PF:0.9770 Freq:50.00Hz Lamp Flux:3192.42x1 lm		
NAME: LLS-M60LAXWS1200(N)	TYPE:	WEIGHT:
SPEC.:LLS-M60LAXWS1200(N)-T28WWW8D-DC-WW	DIM.: 1200*20*23mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*20mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	63	52	46	62	52	45	61	51	45	39
0.80	72	62	55	71	62	55	70	61	55	48
1.00	81	71	64	79	70	64	77	71	63	57
1.25	87	78	71	86	77	71	83	76	70	63
1.50	92	83	77	90	82	76	87	80	75	68
2.00	98	90	85	96	89	84	93	87	82	75
2.50	101	94	89	99	93	88	95	90	86	78
3.00	104	98	93	102	97	92	98	94	90	81
4.00	108	103	99	105	101	97	101	97	94	85
5.00	110	106	102	107	104	100	103	100	97	88
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.0V I:0.1240A P:26.60W PF:0.9770 Freq:50.00Hz Lamp Flux:3192.42x1 lm		
NAME: LLS-M60LAXWS1200(N)	TYPE:	WEIGHT:
SPEC.:LLS-M60LAXWS1200(N)-T28WWW8D-DC-WW	DIM.: 1200*20*23mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*20mm	Shielding Angle:

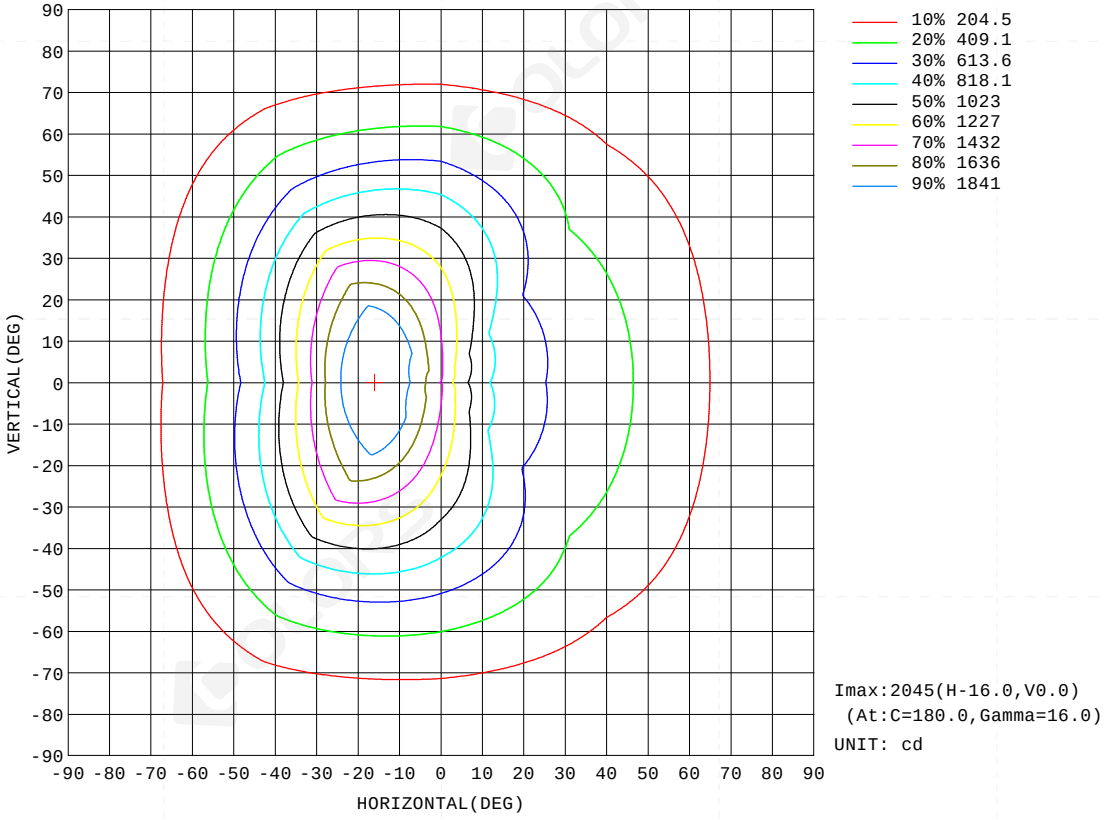


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.0V I:0.1240A P:26.60W PF:0.9770 Freq:50.00Hz Lamp Flux:3192.42x1 lm		
NAME: LLS-M60LAXWS1200(N)	TYPE:	WEIGHT:
SPEC.:LLS-M60LAXWS1200(N)-T28WWW8D-DC-WW	DIM.: 1200*20*23mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*20mm	Shielding Angle:

Flux out:1399 lm

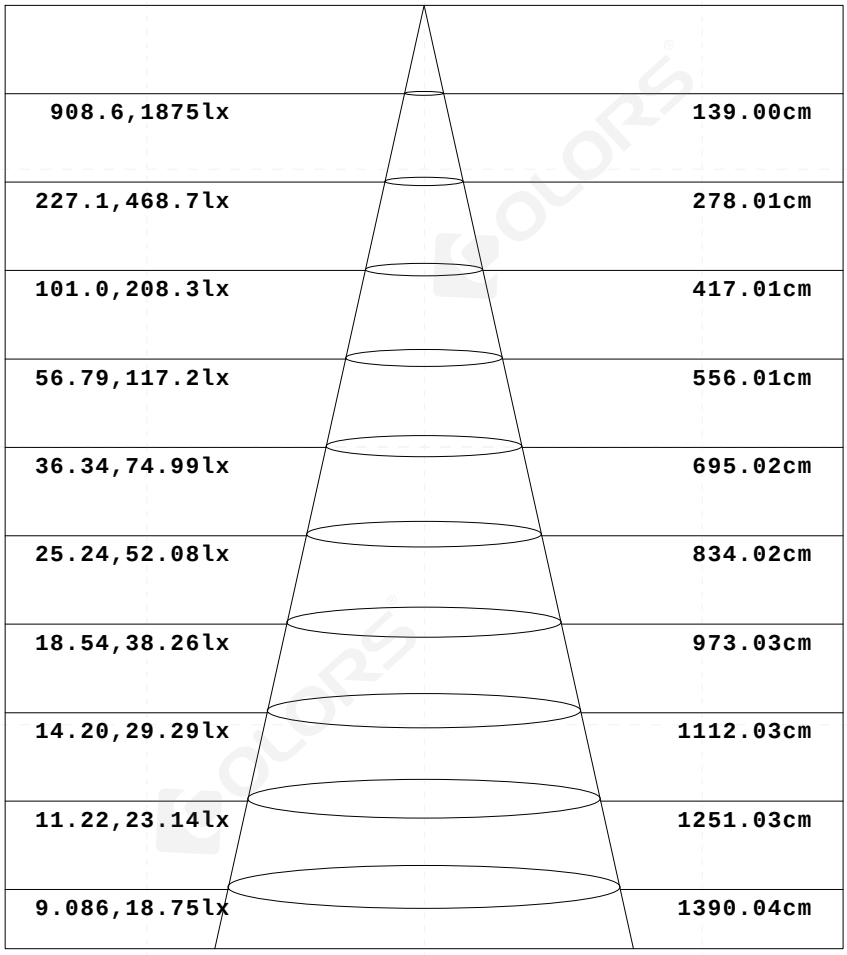


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.0V I:0.1240A P:26.60W PF:0.9770 Freq:50.00Hz Lamp Flux:3192.42x1 lm		
NAME: LLS-M60LAXWS1200(N)	TYPE:	WEIGHT:
SPEC.:LLS-M60LAXWS1200(N)-T28WWW8D-DC-WW	DIM.: 1200*20*23mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*20mm	Shielding Angle:

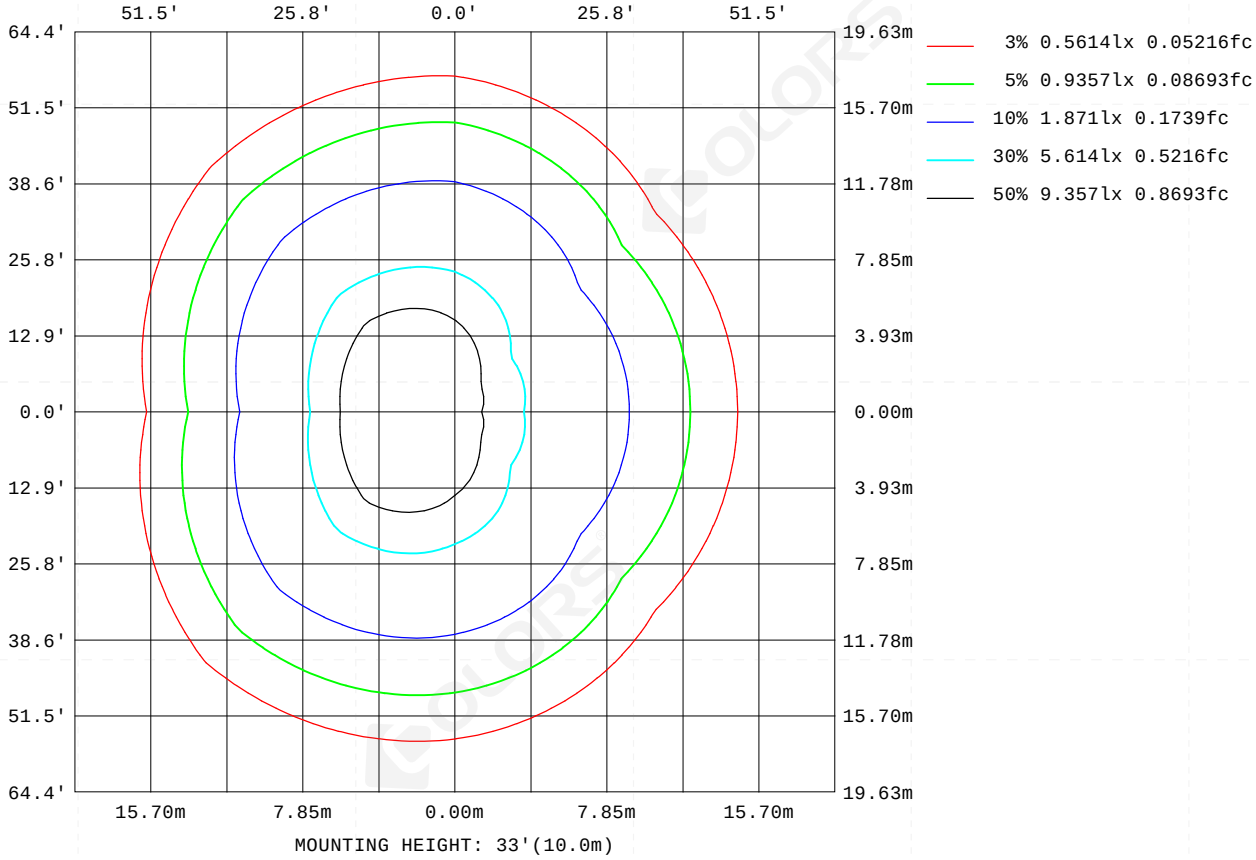

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.0V I:0.1240A P:26.60W PF:0.9770 Freq:50.00Hz Lamp Flux:3192.42x1 lm		
NAME: LLS-M60LAXWS1200(N)	TYPE:	WEIGHT:
SPEC.:LLS-M60LAXWS1200(N)-T28WWW8D-DC-WW	DIM.: 1200*20*23mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*20mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	21813
L_0~180(75)av	15635
L_0~180(85)av	11077
L_90~270(65)av	32126
L_90~270(75)av	24387
L_90~270(85)av	15522
L_45(65)av	29297
L_45(75)av	21760
L_45(85)av	13350

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

Planar Illuminance Curve

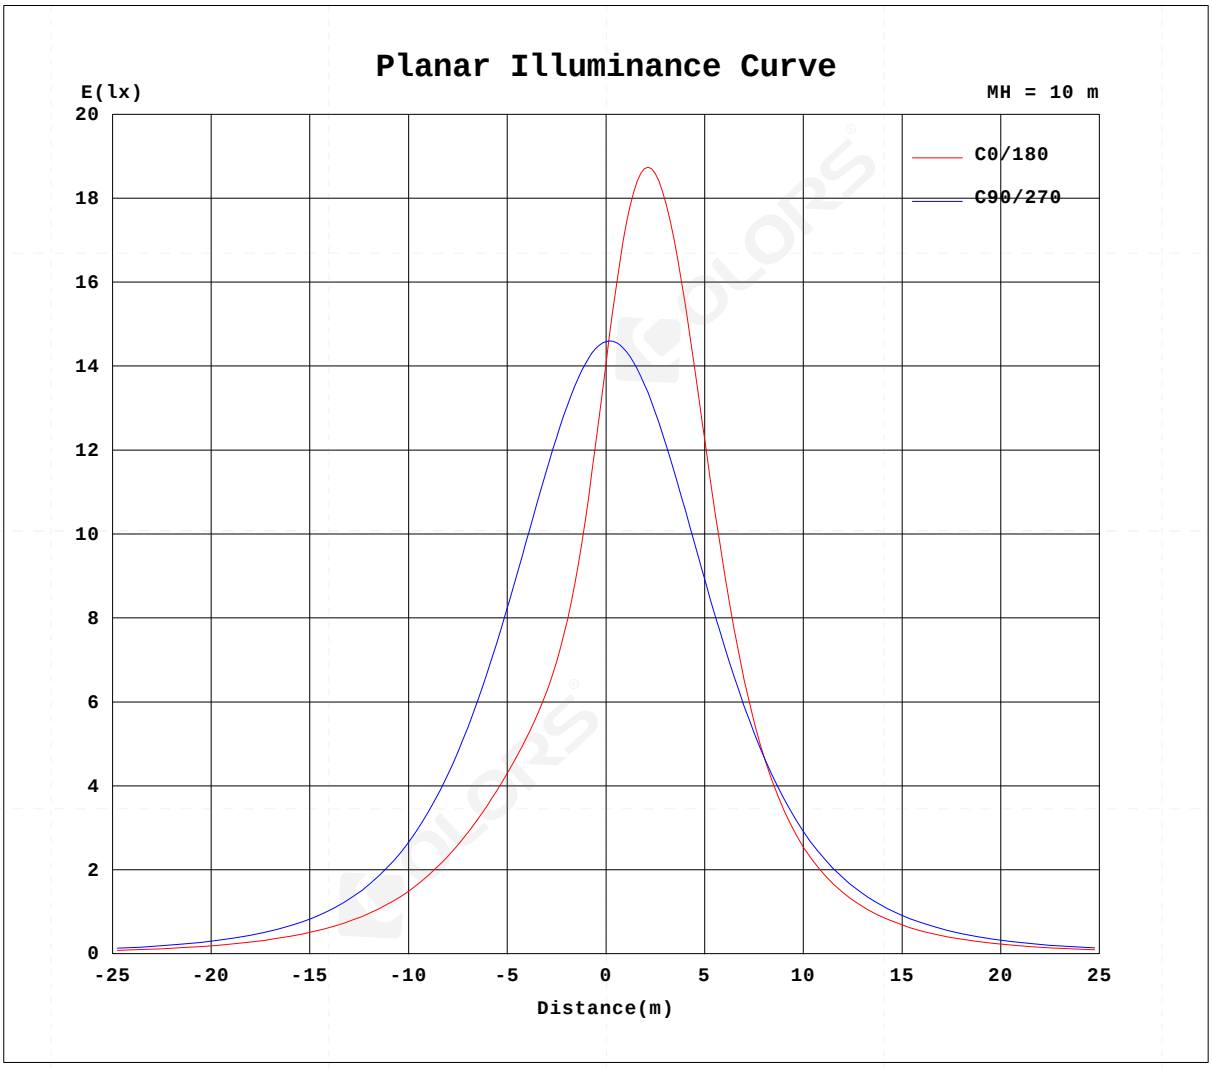

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.0V I:0.1240A P:26.60W PF:0.9770 Freq:50.00Hz Lamp Flux:3192.42x1 lm		
NAME: LLS-M60LAXWS1200(N)	TYPE:	WEIGHT:
SPEC.:LLS-M60LAXWS1200(N)-T28WWW8D-DC-WW	DIM.: 1200*20*23mm	SERIAL No.:
MFR.: COLORS	SUR.:1200*20mm	Shielding Angle:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	45	90	135	180	225	270	315
0	1408	1453	1459	1429	1408	1453	1459	1429
5	1103	1216	1437	1637	1718	1676	1461	1208
10	878	1007	1394	1797	1947	1844	1441	1010
15	743	847	1336	1885	2044	1932	1405	855
20	667	734	1265	1892	1994	1932	1349	741
25	616	654	1181	1824	1800	1849	1276	659
30	572	592	1086	1697	1503	1702	1183	595
35	526	537	981	1524	1190	1508	1075	539
40	477	483	870	1323	925	1286	954	484
45	424	429	753	1110	722	1057	827	428
50	371	371	635	901	564	842	698	373
55	318	316	520	710	437	656	573	317
60	262	260	412	544	329	502	451	265
65	203	206	316	400	239	371	336	212
70	144	152	228	279	163	256	239	156
75	90.7	102	148	177	104	158	155	103
80	49.2	55.7	83.1	93.8	61.1	81.2	87.6	55.2
85	18.6	23.9	32.5	35.8	27.8	29.5	32.5	22.5
90	0.98	3.57	7.03	4.19	0.62	3.15	5.12	3.63
95	1.19	3.62	6.77	3.58	0.62	3.15	6.37	3.85
100	1.63	4.16	6.76	3.52	1.04	3.48	6.40	4.66
105	2.26	4.99	3.22	3.70	1.56	3.70	2.25	5.47
110	3.13	5.98	3.92	3.95	2.11	3.83	3.19	6.37
115	4.15	7.24	5.13	4.26	2.62	4.13	4.21	7.50
120	5.30	8.76	6.32	4.61	3.05	4.43	5.27	8.78
125	6.74	10.1	7.49	4.98	3.51	4.80	6.35	9.91
130	8.48	11.0	8.74	5.33	3.99	5.12	7.46	11.0
135	10.6	12.8	9.89	5.75	4.50	5.63	8.55	12.3
140	13.2	14.5	10.9	6.21	4.96	6.16	9.59	13.4
145	16.2	15.9	11.9	6.80	5.43	6.75	10.7	14.6
150	19.2	17.1	13.1	7.55	5.95	7.57	12.0	15.8
155	21.9	18.0	14.6	8.53	6.65	8.60	13.6	17.2
160	23.6	19.0	16.1	9.92	7.62	9.93	15.2	19.1
165	24.2	20.4	17.4	11.9	9.05	11.6	16.6	20.7
170	23.9	21.6	18.5	14.5	11.3	14.2	18.0	21.9
175	20.7	21.2	19.5	17.4	13.6	17.3	19.2	21.7
180	17.4	20.1	20.1	20.3	17.4	20.1	20.1	20.3

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2022-08-03

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks: