
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.0V I:0.0310A P:6.200W PF:0.5000 Freq:50.00Hz Lamp Flux:279.979x1 lm		
NAME: TLS-S60SGXWS35RB(N)-T06NW9D-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:38*170mm	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA		Eff: 45.16 lm/W	
MODEL		Imax(cd)	904.6	S/MH(C0/180)	0.50
NOMINAL POWER(W)	6.2	LOR(%)	100.0	S/MH(C90/270)	0.51
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	279.98	h UP,DN(C0-180)	0.0,50.0
NOMINAL FLUX(lm)	279.979	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.0,50.0
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	220	h down(%)	100.0	CIBSE SHR MAX	0.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

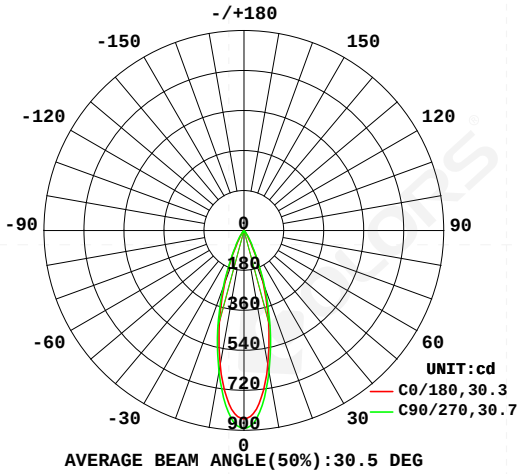

AVERAGE BEAM ANGLE(50%):30.5 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

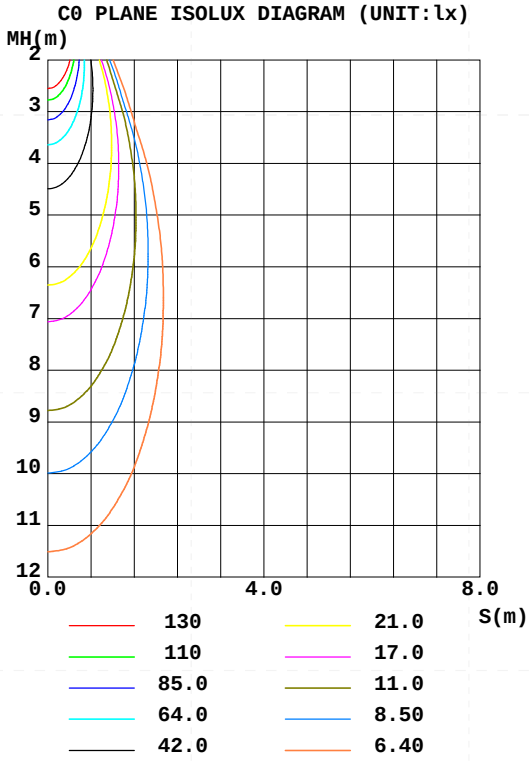

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-03-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	617.9	653.8	648.4	653.8	617.9	653.8	648.4	653.8	0- 10	72.25	72.25	25.8,25.8
20	260.4	270.3	276.4	270.3	260.4	270.3	276.4	270.3	10- 20	122.1	194.3	69.4,69.4
30	50.36	60.88	63.80	60.88	50.36	60.88	63.80	60.88	20- 30	63.23	257.5	92,92
40	9.133	11.42	12.38	11.42	9.133	11.42	12.38	11.42	30- 40	17.60	275.1	98.3,98.3
50	1.418	1.829	2.171	1.829	1.418	1.829	2.171	1.829	40- 50	3.860	279.0	99.6,99.6
60	0.2574	0.3459	0.3941	0.3459	0.2574	0.3459	0.3941	0.3459	50- 60	0.7210	279.7	99.9,99.9
70	0.1066	0.1004	0.1236	0.1004	0.1066	0.1004	0.1236	0.1004	60- 70	0.2076	279.9	100,100
80	0.0134	0.0217	0.0000	0.0217	0.0134	0.0217	0.0000	0.0217	70- 80	0.0510	280.0	100,100
90	0	0	0	0	0	0	0	0	80- 90	0.0044	280.0	100,100
100	0	0	0	0	0	0	0	0	90-100	0	280.0	100,100
110	0	0	0	0	0	0	0	0	100-110	0	280.0	100,100
120	0	0	0	0	0	0	0	0	110-120	0	280.0	100,100
130	0	0	0	0	0	0	0	0	120-130	0	280.0	100,100
140	0	0	0	0	0	0	0	0	130-140	0	280.0	100,100
150	0	0	0	0	0	0	0	0	140-150	0	280.0	100,100
160	0	0	0	0	0	0	0	0	150-160	0	280.0	100,100
170	0	0	0	0	0	0	0	0	160-170	0	280.0	100,100
180	0	0	0	0	0	0	0	0	170-180	0	280.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-03-09


g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.0V I:0.0310A P:6.200W PF:0.5000 Freq:50.00Hz Lamp Flux:279.979x1 lm		
NAME: TLS-S60SGXWS35RB(N)-T06NW9D-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:38*170mm	Shielding Angle:

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

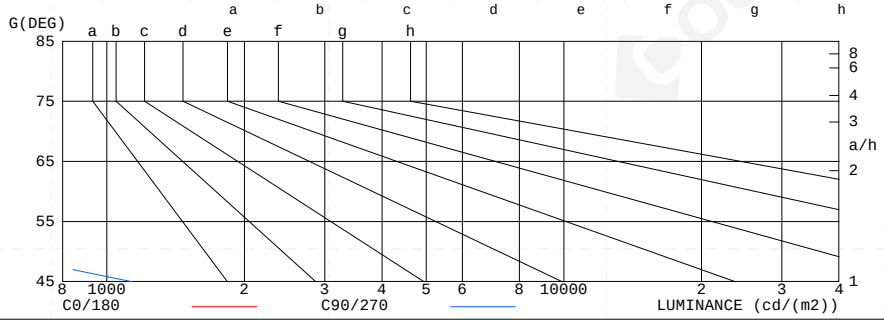

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	0	0
80	12	0
75	16	36
70	49	56
65	64	88
60	80	123
55	159	208
50	345	528
45	774	1137

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-03-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:


CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.0V I:0.0310A P:6.200W PF:0.5000 Freq:50.00Hz Lamp Flux:279.979x1 lm		
NAME: TLS-S60SGXWS35RB(N)-T06NW9D-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:38*170mm	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.09	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.01	1.00	.99	.98	.98	.96
2.0	1.07	1.03	1.01	1.05	1.02	.99	1.02	.99	.97	.99	.97	.95	.96	.95	.93	.92
3.0	1.01	.97	.94	1.00	.96	.94	.98	.95	.92	.95	.93	.91	.93	.91	.89	.88
4.0	.97	.92	.89	.96	.92	.89	.94	.90	.88	.92	.89	.87	.90	.88	.86	.84
5.0	.93	.88	.85	.92	.88	.84	.90	.86	.84	.89	.85	.83	.87	.84	.82	.81
6.0	.89	.84	.81	.88	.84	.81	.87	.83	.80	.85	.82	.80	.84	.81	.79	.78
7.0	.85	.81	.77	.85	.80	.77	.84	.80	.77	.83	.79	.77	.82	.78	.76	.75
8.0	.82	.78	.74	.82	.77	.74	.81	.77	.74	.80	.76	.74	.79	.76	.73	.72
9.0	.79	.75	.72	.79	.74	.71	.78	.74	.71	.77	.74	.71	.76	.73	.71	.70
10.0	.76	.72	.69	.76	.72	.69	.75	.71	.69	.75	.71	.69	.74	.71	.68	.67

LAMPS

LUMINAIRE BUDGETARY DIAGRAM

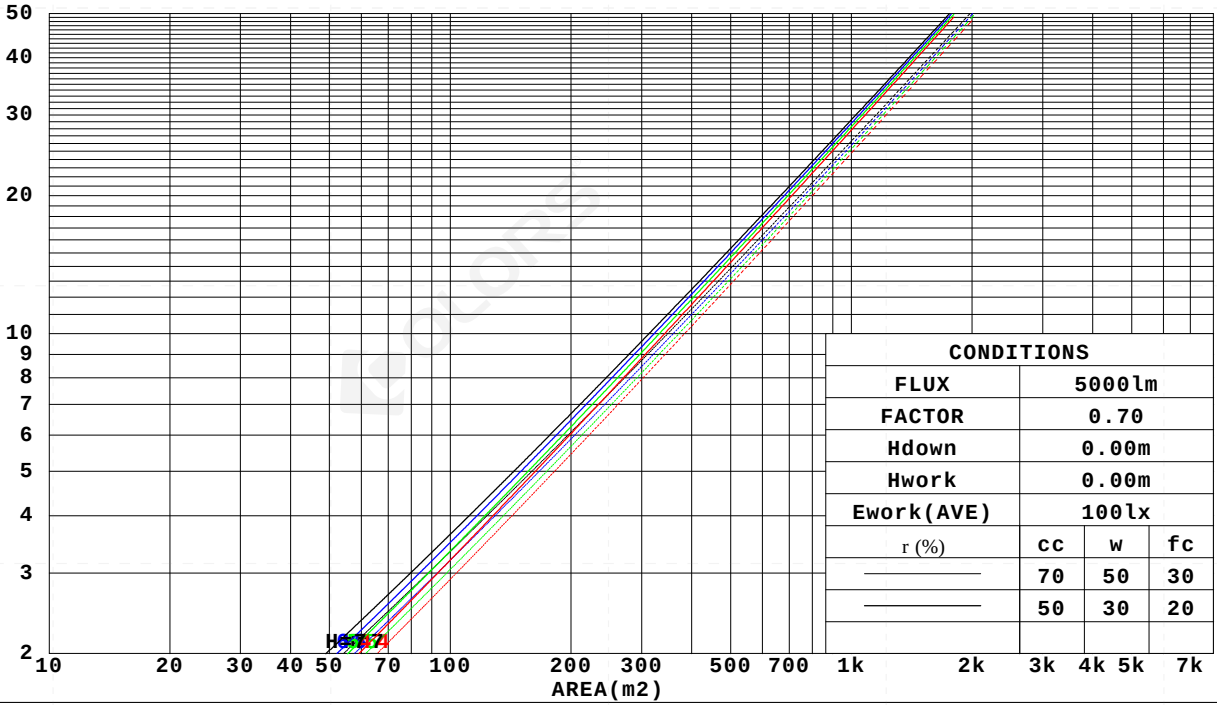

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-03-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:220.0V I:0.0310A P:6.200W PF:0.5000 Freq:50.00Hz Lamp Flux:279.979x1 lm		
NAME: TLS-S60SGXWS35RB(N)-T06NW9D-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:38*170mm	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.147	.083	.026	.140	.080	.025	.128	.073	.023	.116	.067	.021	.106	.061	.020	
2.0	.137	.075	.023	.132	.073	.022	.121	.068	.021	.112	.063	.020	.103	.058	.018	
3.0	.129	.069	.021	.124	.067	.020	.116	.063	.019	.108	.059	.018	.100	.055	.017	
4.0	.122	.063	.019	.118	.062	.018	.110	.059	.017	.104	.056	.017	.097	.053	.016	
5.0	.115	.059	.017	.112	.057	.017	.106	.055	.016	.100	.053	.016	.094	.050	.015	
6.0	.109	.055	.016	.107	.054	.015	.101	.052	.015	.096	.050	.015	.091	.048	.014	
7.0	.104	.052	.015	.102	.051	.014	.097	.049	.014	.093	.047	.014	.088	.046	.014	
8.0	.100	.049	.014	.098	.048	.014	.093	.047	.013	.089	.045	.013	.086	.044	.013	
9.0	.096	.046	.013	.094	.046	.013	.090	.044	.013	.086	.043	.012	.083	.042	.012	
10.0	.092	.044	.012	.090	.044	.012	.087	.043	.012	.084	.042	.012	.081	.041	.012	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.016	
2.0	.152	.133	.117	.130	.114	.101	.089	.079	.070	.051	.046	.041	.016	.015	.013	
3.0	.137	.113	.094	.118	.098	.082	.081	.068	.057	.047	.040	.034	.015	.013	.011	
4.0	.125	.098	.077	.108	.085	.067	.074	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.115	.086	.064	.099	.074	.056	.068	.052	.039	.040	.031	.023	.013	.010	.008	
6.0	.107	.076	.054	.092	.066	.047	.063	.046	.033	.037	.027	.020	.012	.009	.007	
7.0	.100	.068	.046	.086	.059	.040	.059	.041	.028	.034	.024	.017	.011	.008	.006	
8.0	.094	.062	.040	.081	.053	.035	.056	.038	.025	.032	.022	.015	.010	.007	.005	
9.0	.088	.056	.034	.076	.049	.030	.053	.034	.021	.031	.020	.013	.010	.007	.004	
10.0	.083	.051	.030	.072	.045	.026	.050	.031	.019	.029	.019	.011	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-03-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.0V I:0.0310A P:6.200W PF:0.5000 Freq:50.00Hz Lamp Flux:279.979x1 lm		
NAME: TLS-S60SGXWS35RB(N)-T06NW9D-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:38*170mm	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.7	9.4	8.9	9.6	9.7	9.9	10.6	10.1	10.8	10.9
3H	8.6	9.2	8.8	9.4	9.6	9.8	10.4	10.0	10.6	10.8
4H	8.5	9.1	8.7	9.3	9.5	9.7	10.3	9.9	10.5	10.7
6H	8.4	9.0	8.7	9.2	9.5	9.6	10.2	9.9	10.4	10.7
8H	8.4	8.9	8.7	9.2	9.4	9.5	10.1	9.8	10.4	10.6
12H	8.3	8.9	8.6	9.1	9.4	9.5	10.1	9.8	10.3	10.6
4H 2H	8.5	9.1	8.8	9.3	9.5	9.7	10.3	9.9	10.5	10.7
3H	8.3	8.9	8.6	9.1	9.4	9.5	10.1	9.8	10.3	10.6
4H	8.2	8.7	8.6	9.0	9.3	9.4	9.9	9.7	10.2	10.5
6H	8.1	8.6	8.5	8.9	9.2	9.3	9.8	9.7	10.1	10.4
8H	8.1	8.5	8.5	8.8	9.2	9.3	9.7	9.6	10.0	10.4
12H	8.0	8.4	8.4	8.8	9.2	9.2	9.6	9.6	10.0	10.3
8H 4H	8.1	8.5	8.5	8.8	9.2	9.3	9.7	9.6	10.0	10.4
6H	8.0	8.3	8.4	8.7	9.1	9.1	9.5	9.6	9.9	10.3
8H	7.9	8.2	8.4	8.6	9.1	9.1	9.4	9.5	9.8	10.2
12H	7.8	8.1	8.3	8.5	9.0	9.0	9.3	9.5	9.7	10.2
12H 4H	8.0	8.4	8.4	8.8	9.2	9.2	9.6	9.6	10.0	10.3
6H	7.9	8.2	8.4	8.6	9.1	9.1	9.4	9.5	9.8	10.2
8H	7.8	8.1	8.3	8.5	9.0	9.0	9.3	9.5	9.7	10.2
Variations with the observer position at spacings:										
S = 1.0H	+ 3.1 / -13.5					+ 3.7 / -13.0				
1.5H	+ 5.3 / -10.6					+ 5.9 / -11.3				
2.0H	+ 5.9 / - 8.0					+ 6.8 / - 8.0				

CIE Pub.117, 280.0 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.4)

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-03-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.0V I:0.0310A P:6.200W PF:0.5000 Freq:50.00Hz Lamp Flux:279.979x1 lm		
NAME: TLS-S60SGXWS35RB(N)-T06NW9D-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:38*170mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	91	85	81	90	85	81	89	84	81	78
0.80	98	92	89	97	92	89	96	91	88	85
1.00	101	96	93	101	96	93	99	96	92	89
1.25	105	100	97	104	100	97	102	99	96	92
1.50	107	103	100	106	102	100	104	101	99	94
2.00	110	106	103	108	105	102	106	103	101	96
2.50	111	108	105	110	106	104	107	104	102	96
3.00	113	109	107	111	108	106	107	105	104	97
4.00	114	112	110	112	110	109	109	107	106	99
5.00	116	114	112	114	112	110	110	108	107	100
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-03-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.0V I:0.0310A P:6.200W PF:0.5000 Freq:50.00Hz Lamp Flux:279.979x1 lm		
NAME: TLS-S60SGXWS35RB(N)-T06NW9D-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:38*170mm	Shielding Angle:

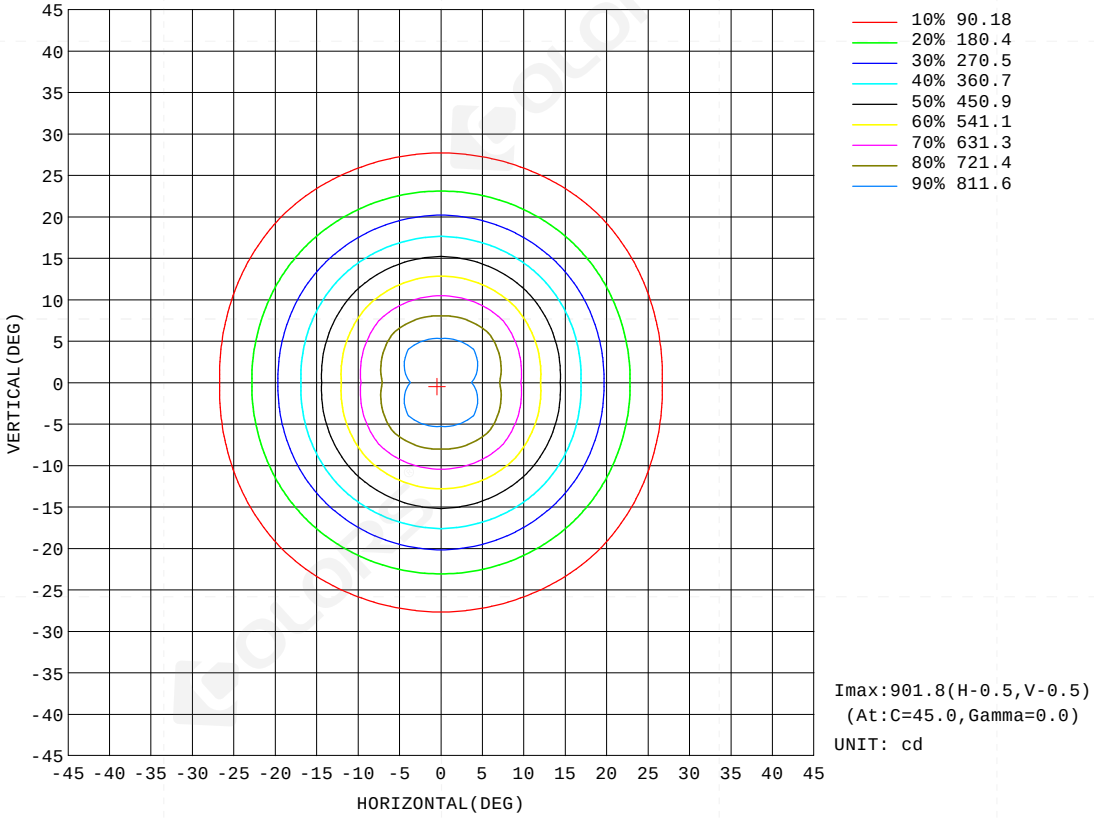


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-03-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.0V I:0.0310A P:6.200W PF:0.5000 Freq:50.00Hz Lamp Flux:279.979x1 lm		
NAME: TLS-S60SGXWS35RB(N)-T06NW9D-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:38*170mm	Shielding Angle:

Flux out:136.2 lm

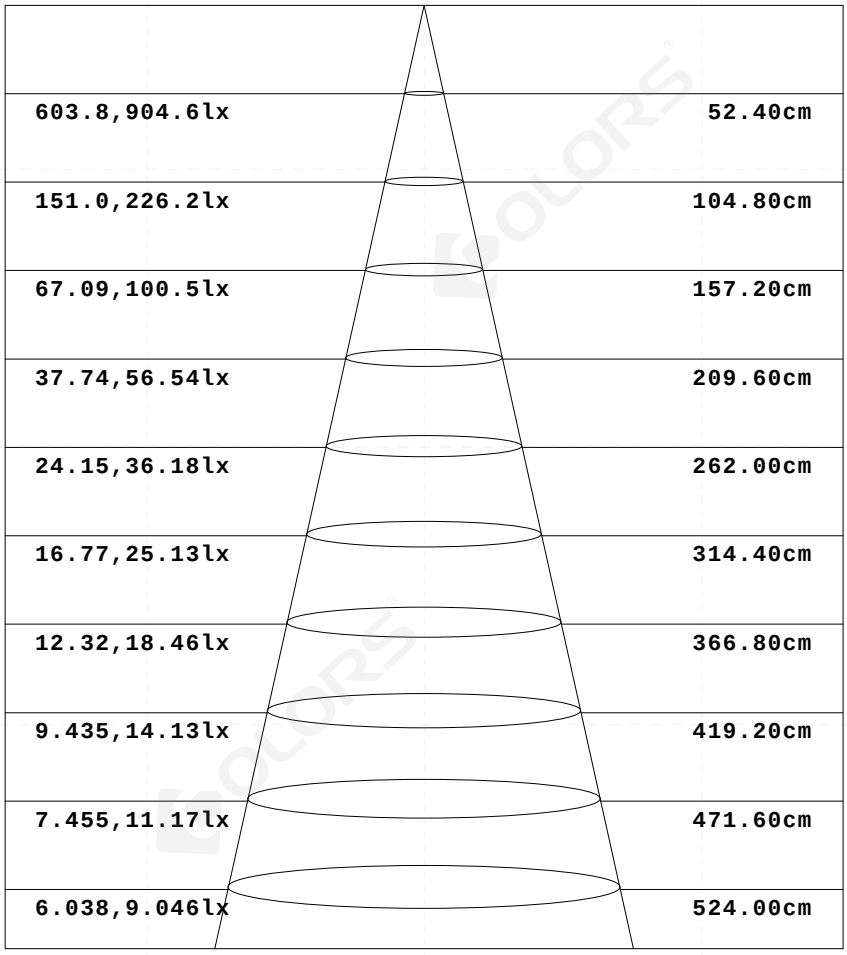

Height Eavg,Emax Angle:29.36deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-03-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.0V I:0.0310A P:6.200W PF:0.5000 Freq:50.00Hz Lamp Flux:279.979x1 lm		
NAME: TLS-S60SGXWS35RB(N)-T06NW9D-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:38*170mm	Shielding Angle:

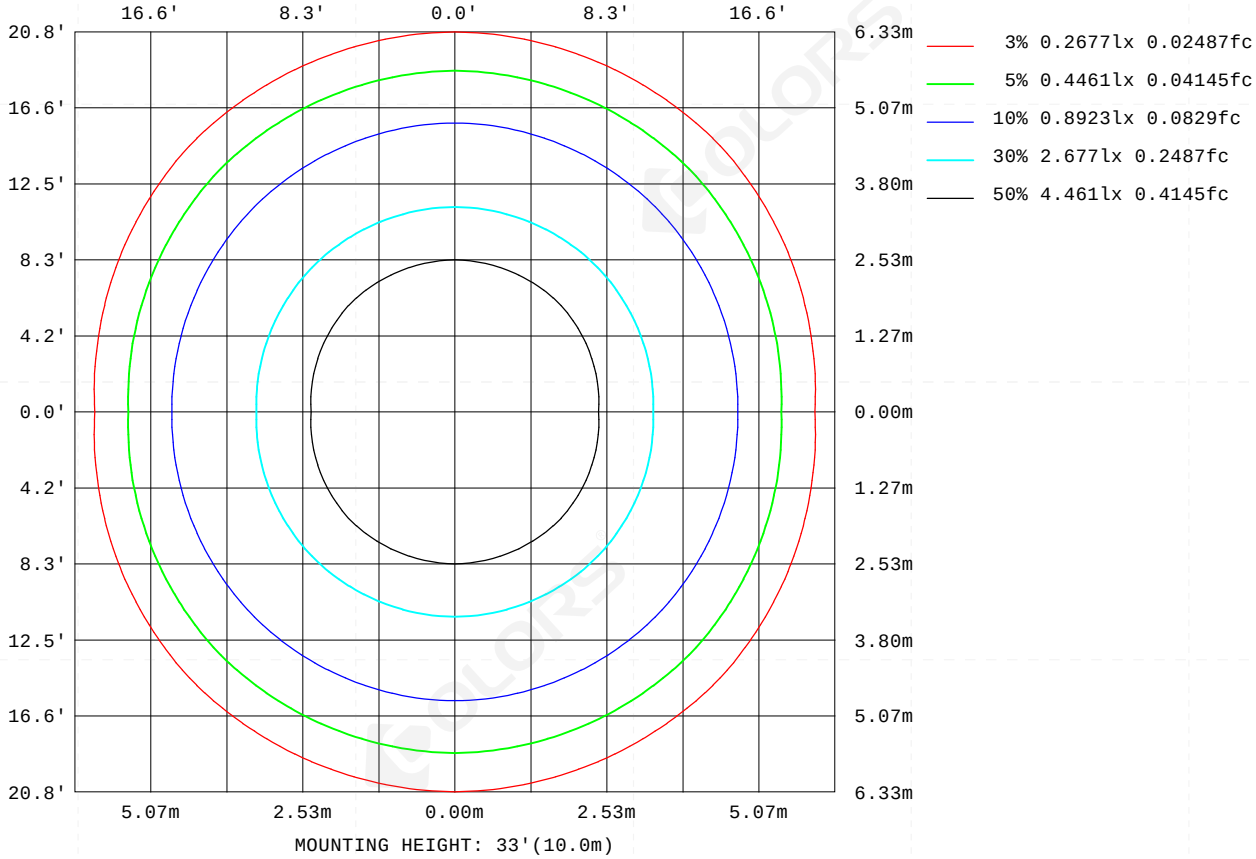

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-03-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:220.0V I:0.0310A P:6.200W PF:0.5000 Freq:50.00Hz Lamp Flux:279.979x1 lm		
NAME: TLS-S60SGXWS35RB(N)-T06NW9D-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:38*170mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	64
L_0~180(75)av	16
L_0~180(85)av	0
L_90~270(65)av	88
L_90~270(75)av	36
L_90~270(85)av	0
L_45(65)av	76
L_45(75)av	28
L_45(85)av	9

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-03-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

Planar Illuminance Curve

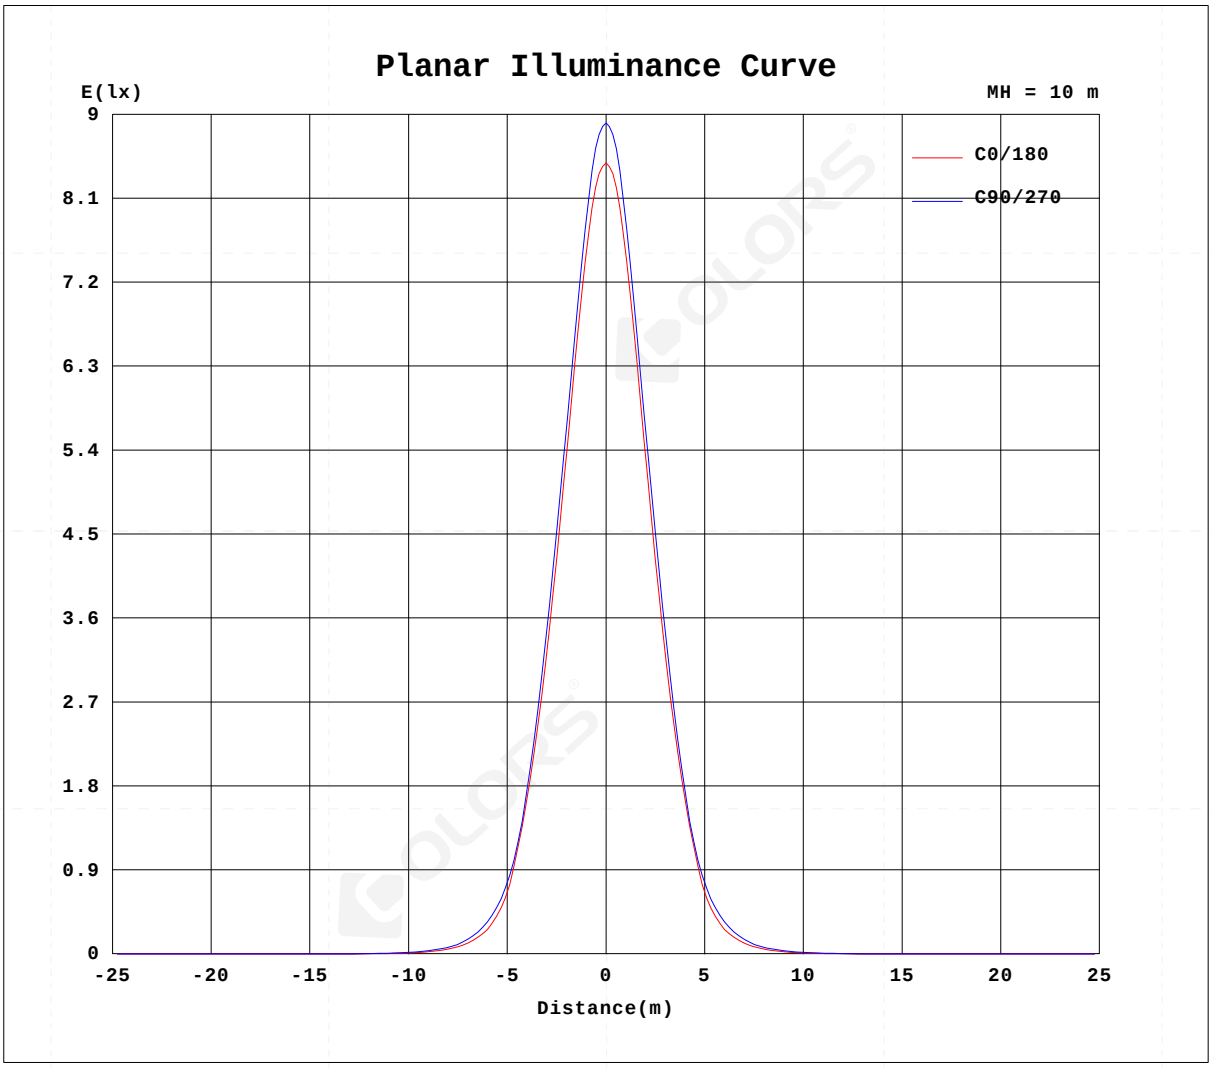

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-03-09

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.0V I:0.0310A P:6.200W PF:0.5000 Freq:50.00Hz Lamp Flux:279.979x1 lm		
NAME: TLS-S60SGXWS35RB(N)-T06NW9D-DC	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: COLORS	SUR.:38*170mm	Shielding Angle:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	45	90	135	180	225	270	315
0	848	905	891	905	848	905	891	905
5	783	830	820	830	783	830	820	830
10	618	654	648	654	618	654	648	654
15	429	452	458	452	429	452	458	452
20	260	270	276	270	260	270	276	270
25	127	132	135	132	127	132	135	132
30	50.4	60.9	63.8	60.9	50.4	60.9	63.8	60.9
35	21.7	27.1	28.9	27.1	21.7	27.1	28.9	27.1
40	9.13	11.4	12.4	11.4	9.13	11.4	12.4	11.4
45	3.50	4.53	5.14	4.53	3.50	4.53	5.14	4.53
50	1.42	1.83	2.17	1.83	1.42	1.83	2.17	1.83
55	0.58	0.66	0.76	0.66	0.58	0.66	0.76	0.66
60	0.26	0.35	0.39	0.35	0.26	0.35	0.39	0.35
65	0.17	0.21	0.24	0.21	0.17	0.21	0.24	0.21
70	0.11	0.10	0.12	0.10	0.11	0.10	0.12	0.10
75	0.03	0.05	0.06	0.05	0.03	0.05	0.06	0.05
80	0.01	0.02	0.00	0.02	0.01	0.02	0.00	0.02
85	0.00	0.01	0.00	0.01	0.00	0.01	0.00	0.01
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:JYH
Test Date:2023-03-09

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:10.950m [K=1.0000]
Remarks: