
LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.23V I:0.1195A P:26.406W PF:0.9637 Freq:49.99Hz Lamp Flux:1992.98x1 lm		
NAME: HCP-81222128-28W 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA		Eff: 75.48 lm/W	
MODEL	HCP-81222128-28W 4000K	Imax(cd)	2170	S/MH(C0/180)	0.88
NOMINAL POWER(W)	28	LOR(%)	100.0	S/MH(C90/270)	0.88
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1993.0	η UP,DN(C0-180)	0.0,49.7
NOMINAL FLUX(lm)	1992.98	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.3
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	220	η down(%)	100.0	CIBSE SHR MAX	0.95

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

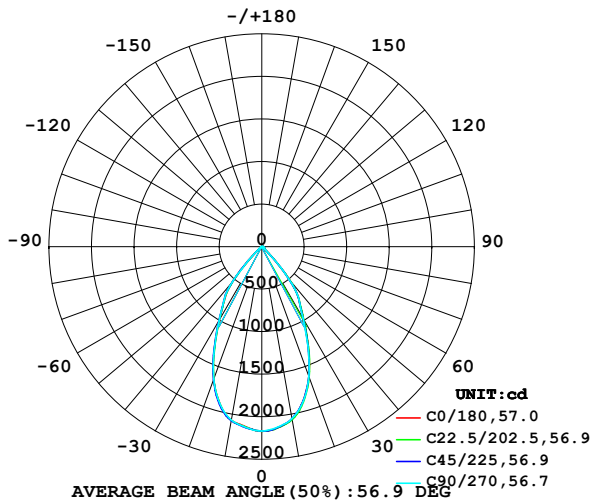

AVERAGE BEAM ANGLE(50%):56.9 DEG

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

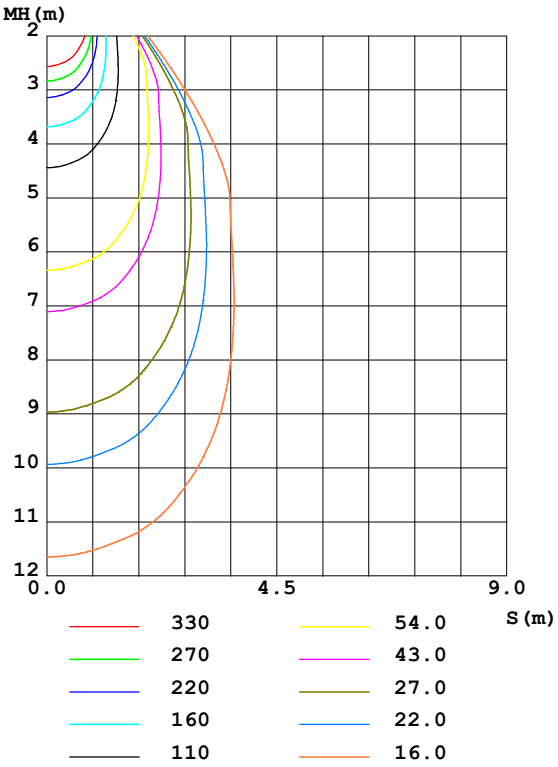

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-81222128-28W 4000K

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2058	2051	2052	2050	2071	2077	2069	2052	0- 10	201.3	201.3	10.1,10.1
20	1622	1617	1621	1631	1652	1662	1654	1632	10- 20	526.0	727.3	36.5,36.5
30	982.8	976.8	971.0	993.7	1010	1012	1005	1004	20- 30	597.3	1325	66.5,66.5
40	499.5	485.1	496.1	510.3	522.0	529.0	521.6	511.3	30- 40	475.0	1800	90.3,90.3
50	45.25	43.85	41.73	39.39	40.39	43.54	50.38	49.45	40- 50	152.6	1952	98,98
60	18.59	19.01	17.78	17.95	18.52	18.76	19.44	18.87	50- 60	25.32	1978	99.2,99.2
70	6.736	6.855	5.968	6.376	6.713	6.643	6.436	6.761	60- 70	11.91	1990	99.8,99.8
80	1.031	0.8485	0.6962	0.7615	0.8194	0.6588	0.6414	0.6412	70- 80	3.111	1993	100,100
90	0.0955	0.0825	0.0912	0.0825	0.1042	0.1042	0.0999	0.1042	80- 90	0.3254	1993	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-01


γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-81222128-28W 4000K

LUMINANCE LIMITATION CURVES

Test:U:229.23V I:0.1195A P:26.406W PF:0.9637 Freq:49.99Hz Lamp Flux:1992.98x1 lm		
NAME: HCP-81222128-28W 4000K	**TYPE:**	**WEIGHT:**
SPEC.:	**DIM.:**	**SERIAL No.:**
MFR.: ONIKE	**SUR.:**	**Shielding Angle:**

LUMINANCE LIMITATION CURVES

GLARE	CLASS	ILLUMINANCE (lx)							
1.15	A	2000	1000	500	<=300				
1.50	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.20	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

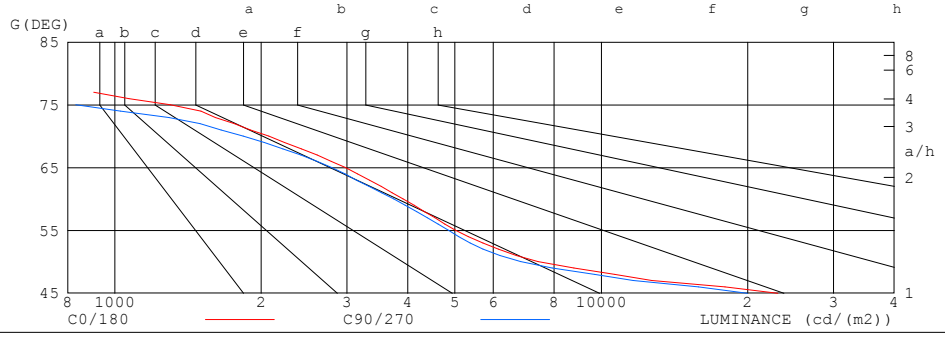

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	417	221
80	625	422
75	1300	832
70	2073	1837
65	2978	2790
60	3914	3743
55	5015	4851
50	7410	6834
45	23059	19959


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-81222128-28W 4000K

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:229.23V I:0.1195A P:26.406W PF:0.9637 Freq:49.99Hz Lamp Flux:1992.98x1 lm		
NAME: HCP-81222128-28W 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.98	.95	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.86
3.0	.95	.90	.86	.94	.89	.85	.91	.87	.84	.89	.86	.83	.87	.84	.82	.80
4.0	.89	.83	.79	.88	.82	.78	.86	.81	.77	.84	.80	.77	.82	.78	.76	.74
5.0	.83	.77	.73	.82	.76	.72	.80	.75	.72	.79	.74	.71	.77	.73	.70	.69
6.0	.78	.71	.67	.77	.71	.67	.75	.70	.66	.74	.69	.66	.73	.69	.65	.64
7.0	.73	.67	.62	.72	.66	.62	.71	.66	.62	.70	.65	.61	.68	.64	.61	.60
8.0	.68	.62	.58	.68	.62	.58	.67	.61	.58	.66	.61	.57	.65	.60	.57	.56
9.0	.64	.58	.54	.64	.58	.54	.63	.58	.54	.62	.57	.54	.61	.57	.54	.52
10.0	.61	.55	.51	.60	.55	.51	.60	.54	.51	.59	.54	.51	.58	.54	.50	.49

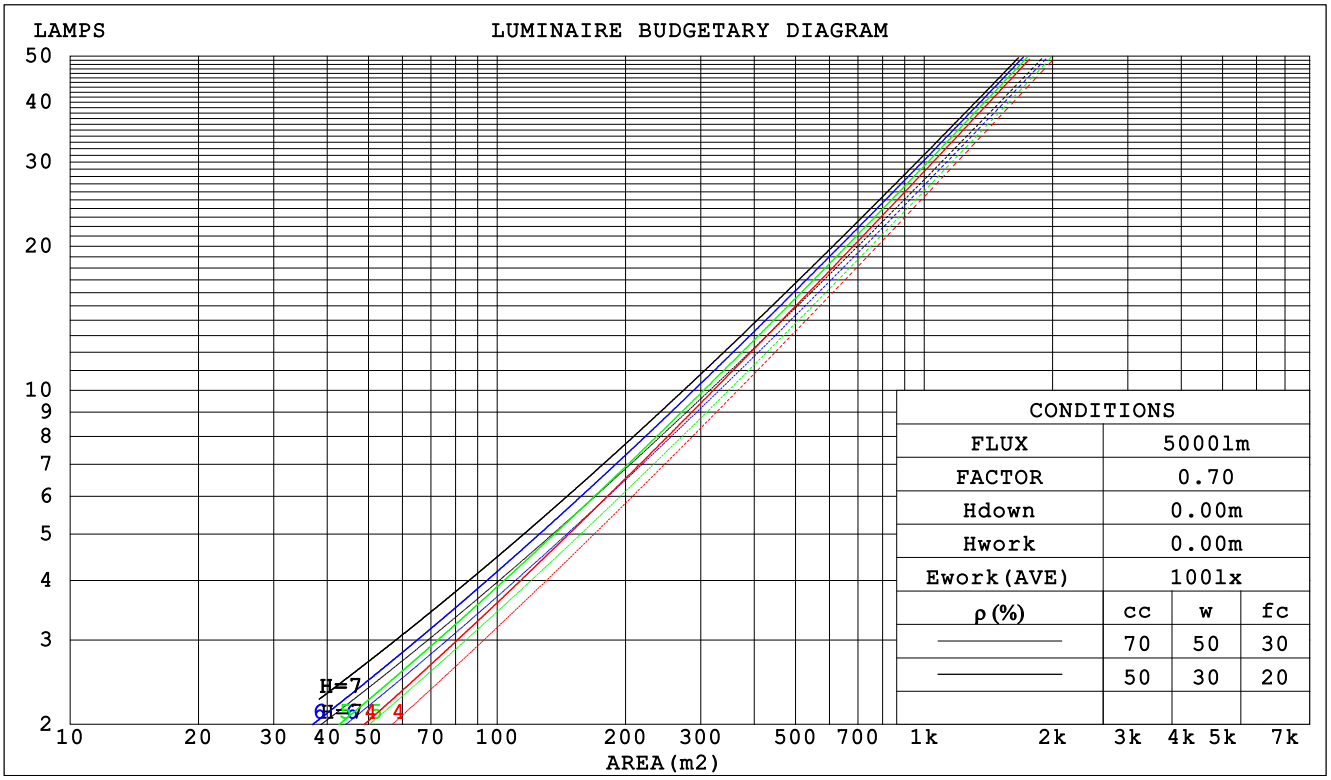

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-81222128-28W 4000K

WEC AND CCEC

Test:U:229.23V I:0.1195A P:26.406W PF:0.9637 Freq:49.99Hz Lamp Flux:1992.98x1 lm		
NAME: HCP-81222128-28W 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coeffcients(WEC)									
0.0																
1.0	.182	.104	.033	.175	.100	.032	.163	.093	.030	.151	.087	.028	.141	.081	.026	
2.0	.175	.096	.029	.170	.093	.029	.159	.088	.027	.149	.084	.026	.140	.079	.025	
3.0	.167	.089	.027	.163	.087	.026	.153	.083	.025	.145	.079	.024	.137	.076	.024	
4.0	.160	.083	.024	.156	.081	.024	.148	.078	.023	.140	.075	.023	.134	.073	.022	
5.0	.152	.078	.022	.149	.076	.022	.142	.074	.022	.135	.071	.021	.129	.069	.021	
6.0	.146	.073	.021	.142	.072	.021	.136	.070	.020	.131	.068	.020	.125	.066	.020	
7.0	.139	.069	.019	.136	.068	.019	.131	.066	.019	.126	.064	.019	.121	.063	.018	
8.0	.133	.065	.018	.131	.064	.018	.126	.063	.018	.121	.061	.018	.117	.060	.017	
9.0	.127	.062	.017	.125	.061	.017	.121	.060	.017	.117	.059	.017	.113	.057	.017	
10.0	.122	.059	.016	.120	.058	.016	.116	.057	.016	.113	.056	.016	.109	.055	.016	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.157	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.145	.114	.089	.124	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.135	.099	.072	.116	.086	.062	.080	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.126	.087	.059	.109	.076	.051	.075	.053	.036	.043	.031	.021	.014	.010	.007	
6.0	.119	.078	.049	.102	.068	.043	.071	.047	.030	.041	.028	.018	.013	.009	.006	
7.0	.113	.071	.041	.097	.061	.036	.067	.043	.026	.039	.025	.015	.013	.008	.005	
8.0	.107	.065	.035	.092	.056	.031	.064	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.102	.060	.031	.088	.052	.027	.061	.036	.019	.036	.021	.011	.012	.007	.004	
10.0	.098	.055	.027	.084	.048	.023	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-81222128-28W 4000K

UGR(Unified Glare Rating) Table

Test:U:229.23V I:0.1195A P:26.406W PF:0.9637 Freq:49.99Hz Lamp Flux:1992.98x1 lm		
NAME: HCP-81222128-28W 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.9	18.9	18.1	19.0	19.2	17.8	18.8	18.0	18.9	19.1
3H	17.7	18.6	18.0	18.8	19.0	17.6	18.5	17.9	18.7	18.9
4H	17.6	18.5	17.9	18.7	18.9	17.5	18.4	17.8	18.6	18.8
6H	17.6	18.4	17.9	18.6	18.9	17.4	18.2	17.7	18.5	18.7
8H	17.5	18.3	17.8	18.5	18.8	17.4	18.2	17.7	18.4	18.7
12H	17.5	18.2	17.8	18.5	18.8	17.4	18.1	17.7	18.4	18.6
4H 2H	17.6	18.5	17.9	18.7	18.9	17.5	18.4	17.8	18.6	18.8
3H	17.5	18.2	17.8	18.5	18.8	17.4	18.1	17.7	18.4	18.7
4H	17.4	18.1	17.8	18.4	18.7	17.3	18.0	17.6	18.3	18.6
6H	17.3	17.9	17.7	18.2	18.6	17.2	17.8	17.6	18.1	18.5
8H	17.3	17.8	17.7	18.2	18.5	17.2	17.7	17.6	18.0	18.4
12H	17.2	17.7	17.6	18.1	18.5	17.1	17.6	17.5	18.0	18.4
8H 4H	17.3	17.8	17.7	18.2	18.5	17.2	17.7	17.6	18.1	18.4
6H	17.2	17.6	17.6	18.0	18.4	17.1	17.5	17.5	17.9	18.3
8H	17.1	17.5	17.6	17.9	18.4	17.0	17.4	17.5	17.8	18.3
12H	17.1	17.4	17.5	17.8	18.3	17.0	17.3	17.4	17.7	18.2
12H 4H	17.2	17.7	17.6	18.1	18.5	17.1	17.6	17.5	18.0	18.4
6H	17.1	17.5	17.6	17.9	18.4	17.0	17.4	17.5	17.8	18.3
8H	17.1	17.4	17.5	17.8	18.3	17.0	17.3	17.4	17.7	18.2
Variations with the observer position at spacings:										
S = 1.0H	+ 2.9 / -11.1					+ 2.9 / -11.5				
1.5H	+ 5.4 / - 9.7					+ 5.4 / - 9.8				
2.0H	+ 6.7 / - 3.9					+ 6.2 / - 3.5				

CIE Pub.117, 1993 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 2.4)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-81222128-28W 4000K

UTILIZATION FACTORS TABLE

Test:U:229.23V I:0.1195A P:26.406W PF:0.9637 Freq:49.99Hz Lamp Flux:1992.98x1 lm		
NAME: HCP-81222128-28W 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	85	79	75	85	79	75	84	78	75	71
0.80	93	87	83	93	87	83	91	86	83	79
1.00	98	92	88	97	92	88	96	92	88	84
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	100	96	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	107	104	106	104	102	95
4.00	114	111	108	111	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended					SHRNOM = 1.25	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-81222128-28W 4000K

ISOCANDELA DIAGRAM

Test:U:229.23V I:0.1195A P:26.406W PF:0.9637 Freq:49.99Hz Lamp Flux:1992.98x1 lm		
NAME: HCP-81222128-28W 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:

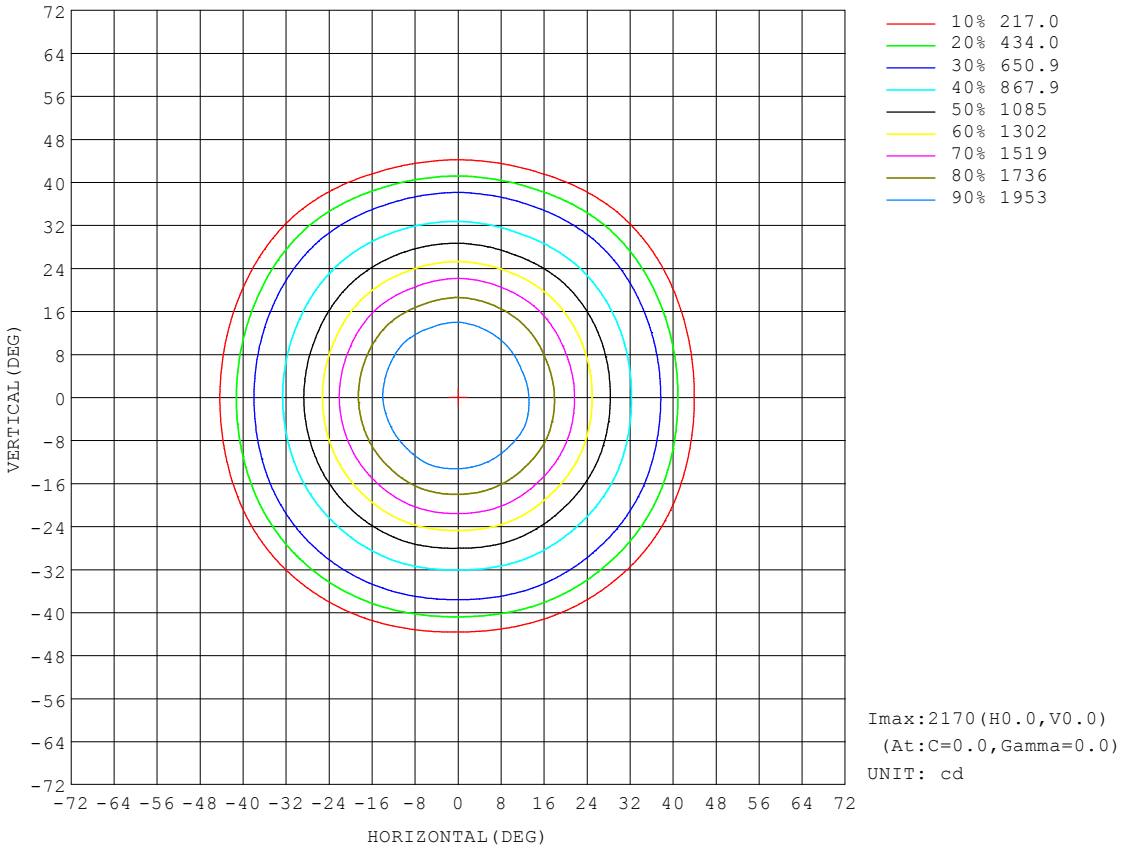


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-81222128-28W 4000K

AAI CURVES

Test:U:229.23V I:0.1195A P:26.406W PF:0.9637 Freq:49.99Hz Lamp Flux:1992.98x1 lm		
NAME: HCP-81222128-28W 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:

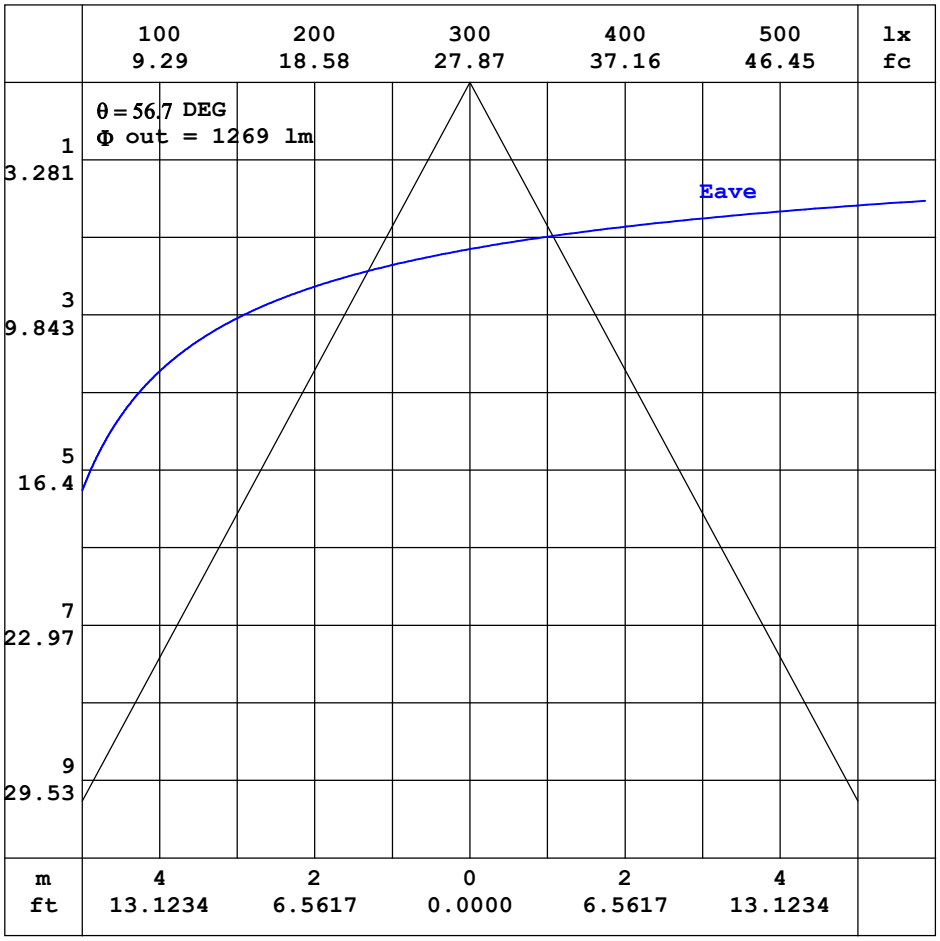


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-81222128-28W 4000K

ISOLUX DIAGRAM

Test:U:229.23V I:0.1195A P:26.406W PF:0.9637 Freq:49.99Hz Lamp Flux:1992.98x1 lm		
NAME: HCP-81222128-28W 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:

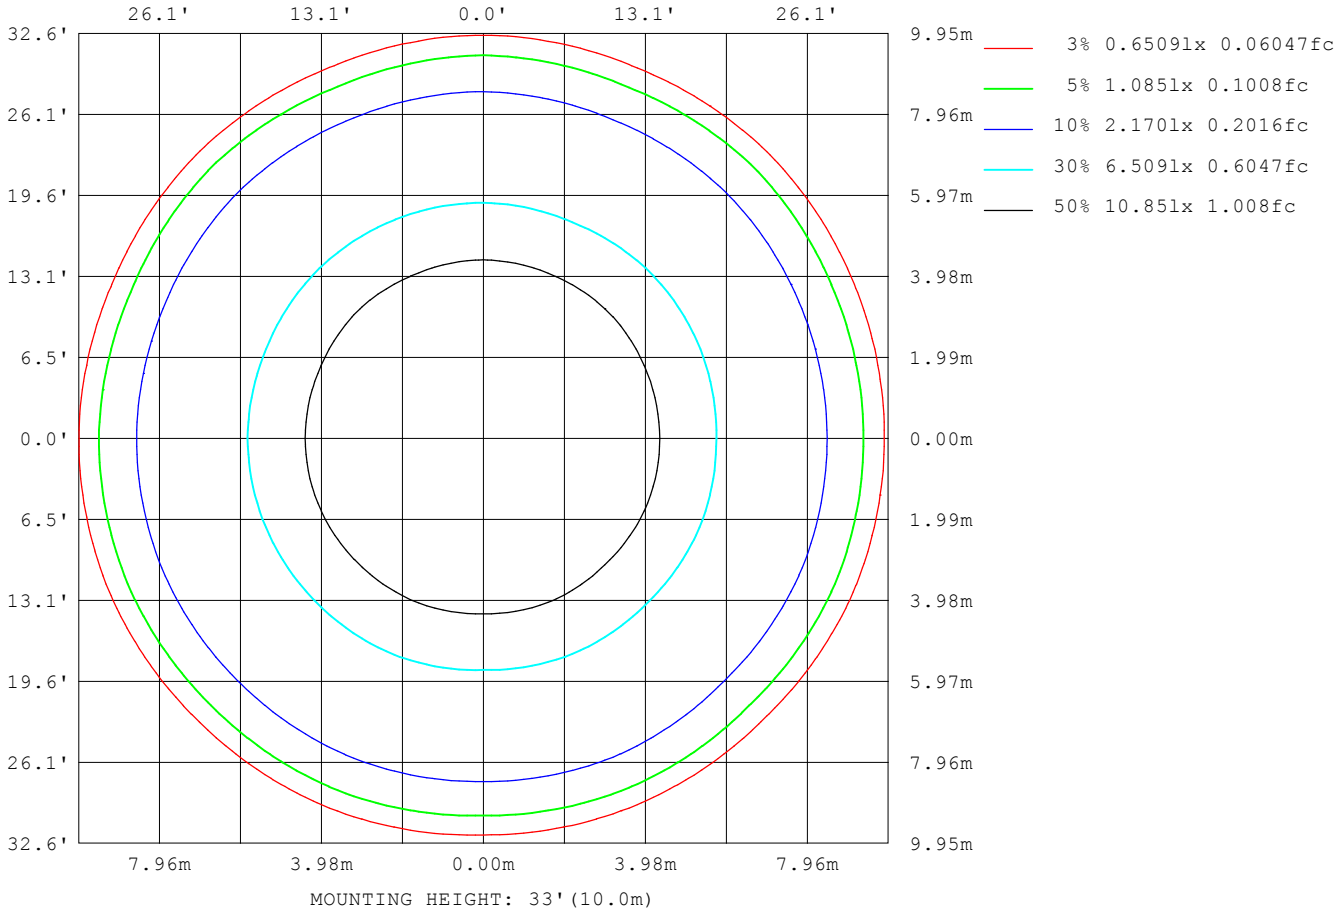

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-81222128-28W 4000K

LED Avg.L Report

Test:U:229.23V I:0.1195A P:26.406W PF:0.9637 Freq:49.99Hz Lamp Flux:1992.98x1 lm		
NAME: HCP-81222128-28W 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	2971
L_0~180(75)av	1220
L_0~180(85)av	350
L_90~270(65)av	2879
L_90~270(75)av	864
L_90~270(85)av	215
L_45(65)av	3011
L_45(75)av	1094
L_45(85)av	232

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-81222128-28W 4000K

Planar Illuminance Curve

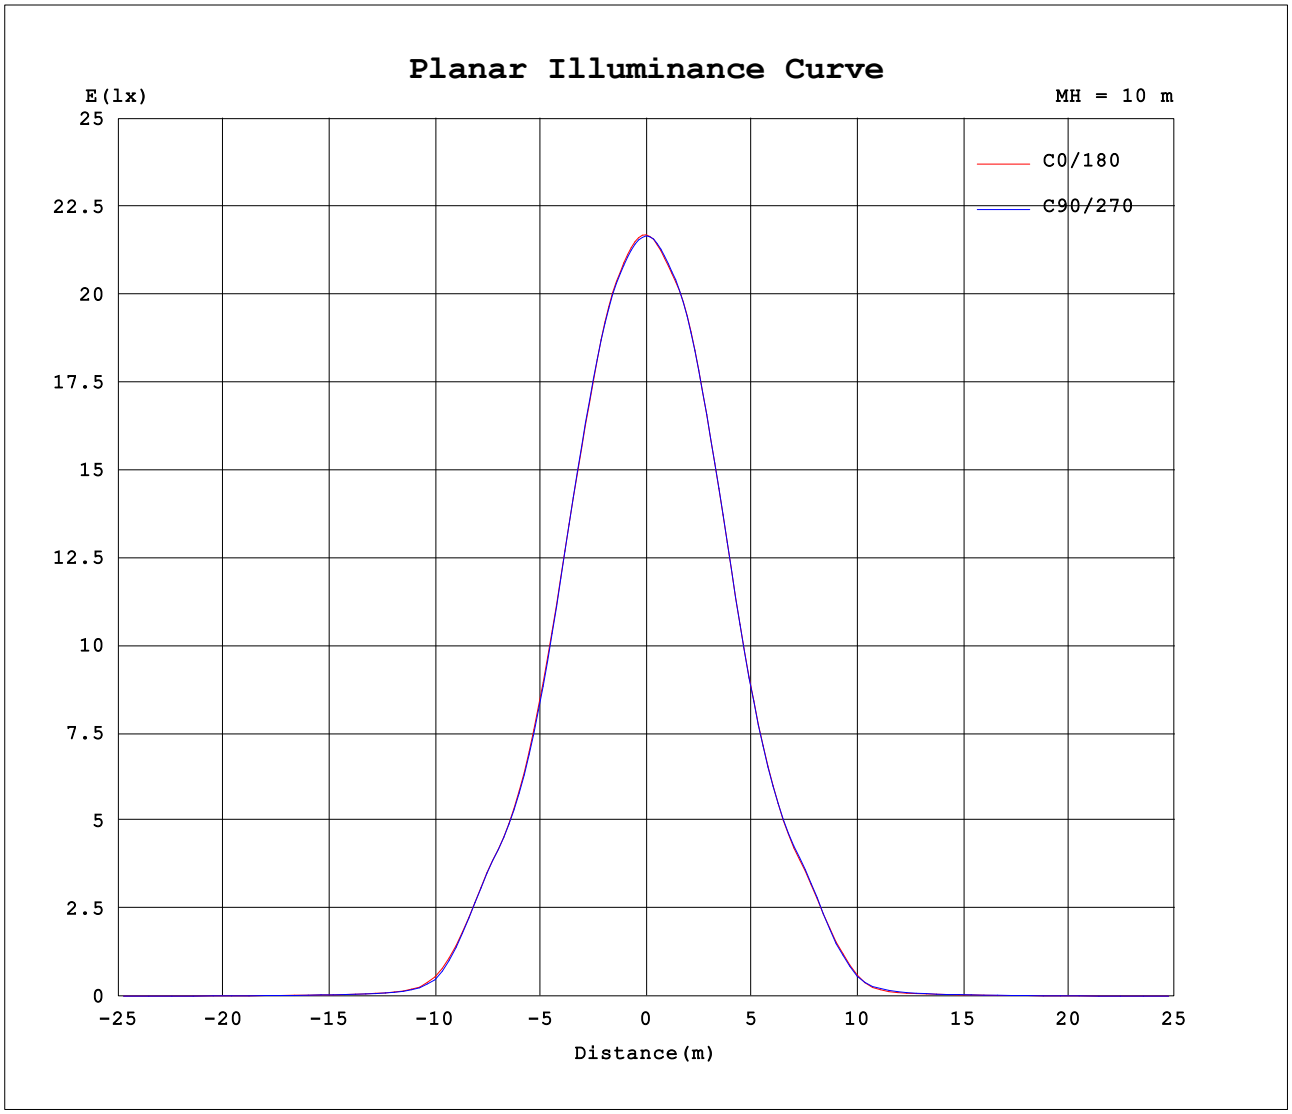

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-81222128-28W 4000K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:229.23V I:0.1195A P:26.406W PF:0.9637 Freq:49.99Hz Lamp Flux:1992.98x1 lm		
NAME: HCP-81222128-28W 4000K	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: ONIKE	SUR.:	Shielding Angle:

Table--1 UNIT: cd

γ (DEG) \ C(DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5
0	2170	2169	2168	2167	2167	2166	2165	2164	2170	2169	2168	2167	2167	2166	2165	2164
5	2138	2140	2136	2135	2130	2128	2122	2120	2127	2132	2136	2134	2134	2128	2128	2127
10	2058	2065	2051	2054	2052	2057	2050	2057	2071	2075	2077	2071	2069	2061	2052	2047
15	1877	1890	1877	1880	1884	1897	1893	1900	1910	1913	1922	1907	1910	1894	1878	1863
20	1622	1631	1617	1627	1621	1635	1631	1643	1652	1652	1662	1643	1654	1639	1632	1612
25	1298	1301	1283	1297	1283	1305	1306	1315	1319	1313	1326	1313	1317	1305	1314	1304
30	983	992	977	987	971	995	994	1003	1010	1001	1012	1009	1005	988	1004	998
35	763	768	761	766	762	763	764	770	770	772	781	777	779	767	771	762
40	499	503	485	504	496	512	510	523	522	515	529	515	522	500	511	501
45	155	153	135	137	134	151	156	169	170	159	164	156	162	155	162	158
50	45.3	45.6	43.8	43.6	41.7	41.1	39.4	39.8	40.4	40.8	43.5	45.0	50.4	49.6	49.5	47.0
55	27.3	27.7	27.8	27.6	26.4	26.0	26.0	26.3	26.3	25.9	27.0	27.1	28.9	28.8	28.8	28.0
60	18.6	19.0	19.0	18.6	17.8	17.7	17.9	18.3	18.5	18.1	18.8	18.7	19.4	19.0	18.9	18.5
65	12.0	12.2	12.4	12.0	11.2	11.4	11.5	11.9	11.9	11.7	12.2	11.9	11.9	11.9	12.2	11.9
70	6.74	6.89	6.85	6.33	5.97	5.96	6.38	6.55	6.71	6.38	6.64	6.23	6.44	6.24	6.76	6.77
75	3.20	3.36	2.88	2.29	2.04	2.11	2.48	2.80	2.80	2.45	2.47	2.18	2.20	2.08	2.93	3.16
80	1.03	0.94	0.85	0.72	0.70	0.67	0.76	0.81	0.82	0.77	0.66	0.65	0.64	0.67	0.64	1.00
85	0.35	0.25	0.21	0.16	0.18	0.15	0.21	0.20	0.23	0.23	0.18	0.19	0.17	0.19	0.17	0.31
90	0.10	0.09	0.08	0.08	0.09	0.09	0.08	0.08	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.11

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-01

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.366
Humidity:65.0%
Test Distance:8.003m [K=1.0000]
Remarks: HCP-81222128-28W 4000K