9W 5 COLOUR TRIMLESS MINI

9W Trimless Mini Recessed Downlight

Aluminium · White with gold insert
240V · TRIAC or DALI 2

9 W MAX WATTAGE	805 lm UP TO
90+ CRI	50° BEAM ANGLE
<19 UGR	IP44 FRONT OF FITTING

WARRANTY T&CS

WEBSITE

Havit Commercial

www.havitcommercial.com.au · 02 9381 8383
sales@havitcommercial.com.au
8/133 Beauchamp Road, Matraville, N.S.W., 2036

ALUMINIUM WHITE

Gold insert · TRIAC or DALI 2



TRIAC DIMMING · DALI · IP44 INDOOR/OUTDOOR WATER RESISTANT · IC-4 · 5 COLOUR By Havit

01 PRODUCT SPECIFICATIONS

MATERIAL	Aluminium + PC
COLOUR / FINISH	White with gold insert
INSTALLATION TYPE	Ceiling – Recessed
CUT OUT	Ø90mm
COLOUR TEMP	2700K · 3000K · 4000K · 5000K · 5700K
LUMENS	750lm · 760lm · 785lm · 800lm · 805lm
INPUT VOLTAGE	240V (supplied with flex & plug)
PROTECTION CLASS	Class 2 – no earth required
LAMP BASE	Built in LED
MAX WATTAGE	9W
DIMMING	TRIAC or DALI 2
CRI	90+
BEAM ANGLE	50°
IP RATING	IP44 (front of fitting only)
IK RATING	IK02
LAMP EXPECTANCY	>50,000hrs*
SDCM	<3
UGR	<19
IC RATING	IC-4
DIFFUSER TYPE	PC
TILT	30°
WARRANTY	5 years replacement*

02 PRODUCT ORDERING


	ORDER CODE	FINISH	LAMP	INPUT	BARCODE
	**HCP-81327909**	Aluminium White	9W built in LED · 5 colour	TRIAC dimmable	9350418060198
	**HCP-81347909**	Aluminium White	9W built in LED · 5 colour	DALI 2 dimmable	9350418060266

SELECTABLE COLOUR TEMP

2700K	3000K	4000K	5000K	5700K
750lm	760lm	785lm	800lm	805lm

03 DIMENSIONS


CUT OUT = Ø90MM

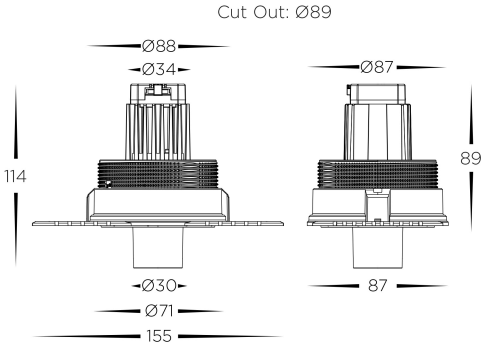

*See Warranty Terms & Conditions for more information.


04 FITTING ROTATION

ADJUSTABLE POSITIONING

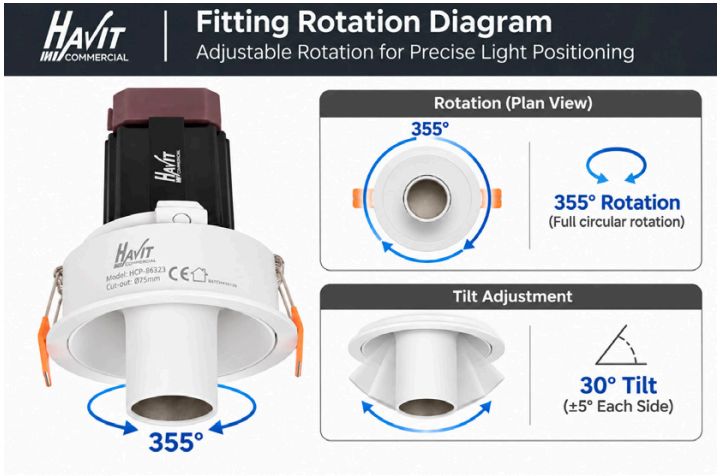

05 PHOTOMETRICS

AVG 50.6°

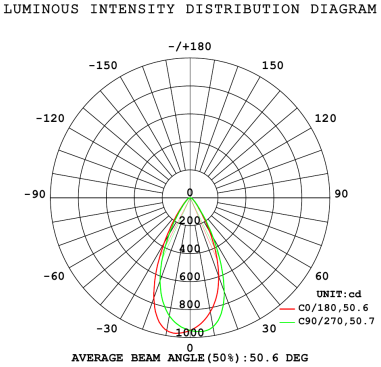


C0/180: 50.6° · C90/270: 50.7°

06 BEAM ANGLE


FLOOR LEVEL*

50°




2.4 m ceiling	**Ø2.24 m**
2.7 m ceiling	**Ø2.52 m**
3.0 m ceiling	**Ø2.80 m**

07 COLOUR TEMP SWITCH




Slide the switch on the back of the module to select the colour temperature.

08 INSTALLATION




01 ISOLATE POWER

Turn off the supply at the switchboard before installing or servicing.




02 CUT THE CEILING

Cut a Ø90mm hole. Check the ceiling void is clear of joists, pipes and cables.



03 SET COLOUR TEMP

Slide the switch on the back of the module to the required colour temperature.



04 CONNECT & INSERT

Plug the flex into the ceiling outlet and seat the fitting in the opening. Fix the trimless frame to the board, then set and finish flush. No clips.

09 ACCESSORIES

SOLD SEPARATELY



HCP-86526	HCP-86227	HCP-86228	HCP-86328
GOLD INNER INSERT	BLACK ROUND INSERT	BLACK OUTER INSERT	WHITE OUTER INSERT

10 INSTALLATION NOTES

01 Installation must be carried out by a licensed electrician in accordance with AS/NZS 3000.

02 Supplied with flex and plug for 240V mains connection. Class 2 – no earth required.

03 Allow a minimum 115mm clear ceiling void (fitting height 114mm).

04 IC-4 rated: building insulation rated for continuous exposure to 90°C may abut and cover the fitting.

05 IP44 applies to the front of the fitting only – the rear must sit in a dry ceiling space.

06 Dimming performance depends on the TRIAC or DALI 2 control used with the selected model.

07 Optional inserts are sold separately and change the finish of the lamp tube and surround.

08 Clean with a soft dry cloth only. Do not use solvents or abrasive cleaners.

*Beam diameters are calculated from the nominal beam angle (50% peak intensity) and are indicative only. See Warranty Terms & Conditions for more information.