Report No.: 001 Test Time: 2022-02-15 11:53

Luminaire Property

Luminaire Manufacturer:
Luminaire Category: Outdoor lighting
Luminaire Description: HCP-262430-3K
Lamp Catalog: SMD
Voltage: 240.3 V
Current: 0.094 A
Power: 21.63 W
Power Factor: 0.960


Photometric Results

CIE Class: Semi-Direct
Total Rated Lamp Lumens: 1404.7 lm
Measurement Flux: 1404.7 lm
Efficiency: 100%
Downward Ratio: 87%
Upward Ratio: 13%
Field Angle(C0/C180,C90/C270,C45/C225,C135/315): 200.1, 164.6, 264.5, 259.1
Beam Angle(C0/C180,C90/C270,C45/C225,C135/315): 139.5, 133.3, 136.6, 135.9
Luminaire Efficacy Rating (LER): 64.99
Central Intensity: 0.22 cd
Max. Intensity: 378.77 cd
Pos of Max. Intensity: H180 V54
S/MH(C0/C180): 17.14
S/MH(C90/C270): 4.60

Picture Of Luminaire





Luminous Intensity Distribution Curve

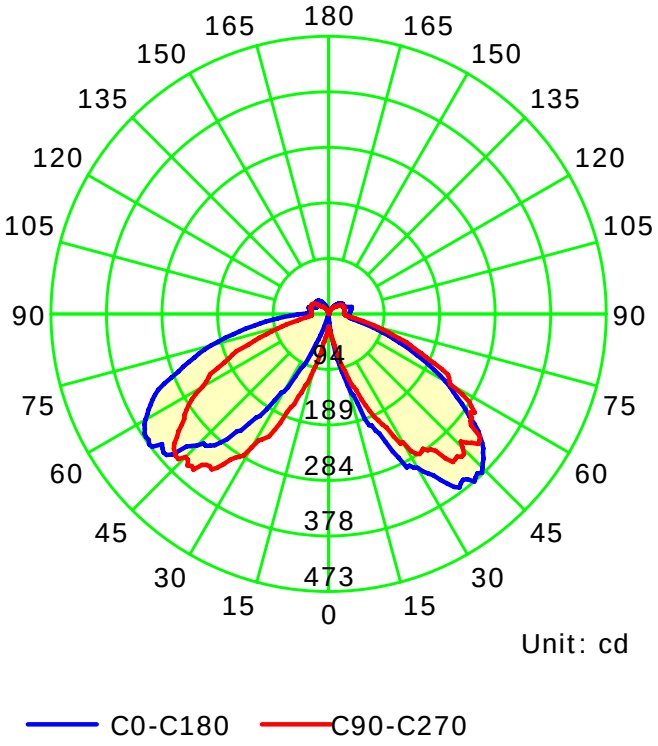

C Plane (°):0.0-360.0: 45.0
Gamma Plane (°):0.0-180.0:1.0
Test Lab: NINGBO LED LIGHTING
Test Device: GPM-1600L
Test Type: TYPE C
Distance: 6.583 m
Temperature: 25°C
Humidity:
Operator: DING LI
Inspector:

Luminous Intensity Distribution Curve

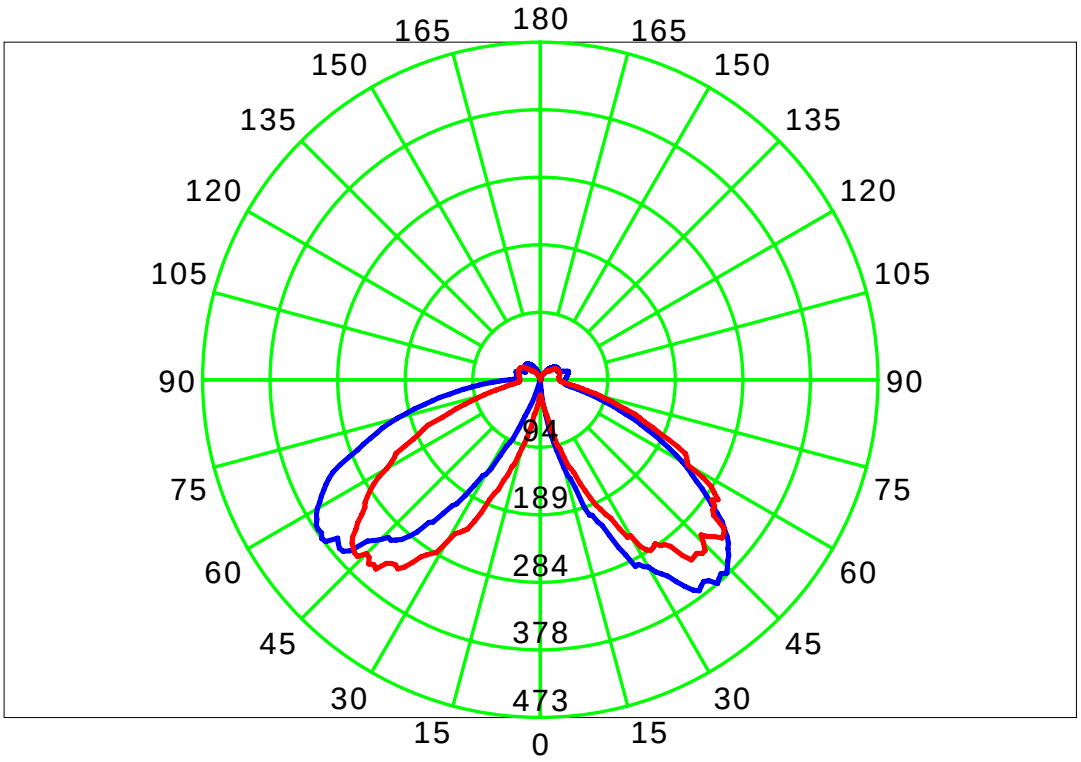


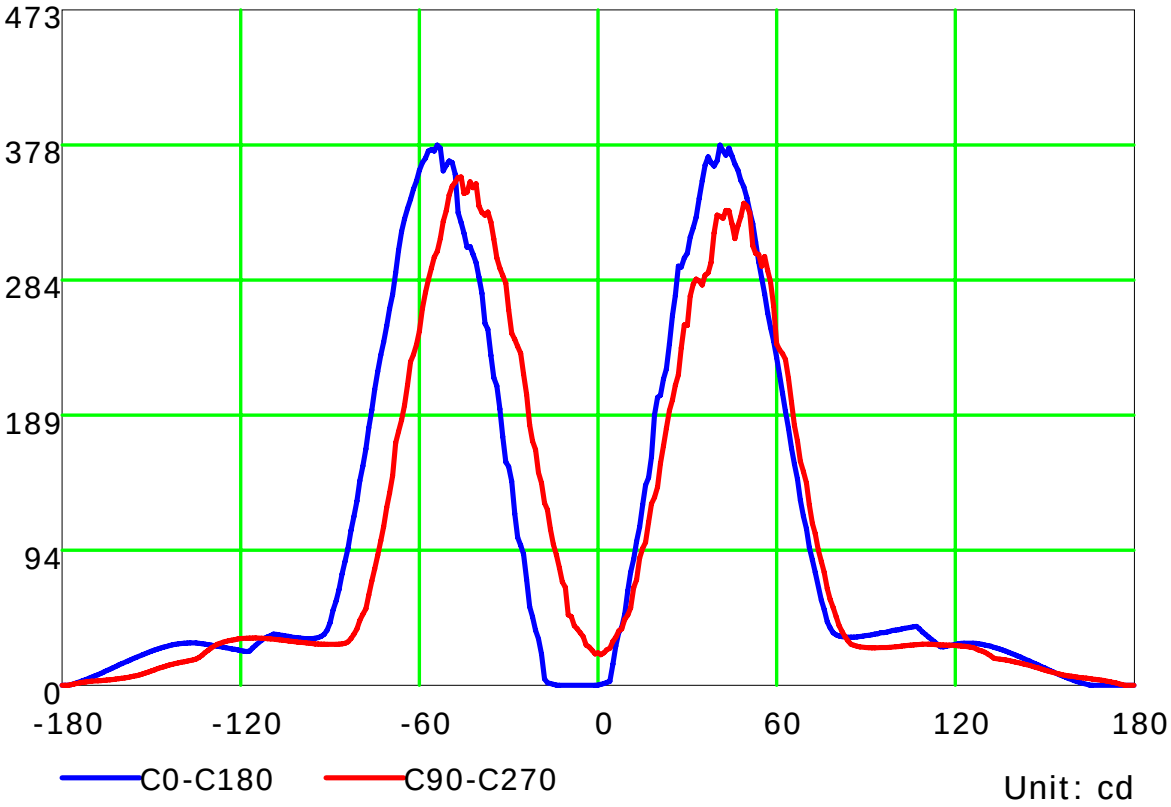

C Plane (°):0.0-360.0: 45.0
Test Lab: NINGBO LED LIGHTING
Test Type: TYPE C
Temperature: 25°C
Operator: DING LI

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.583 m
Humidity:
Inspector:

IsoLux Plot

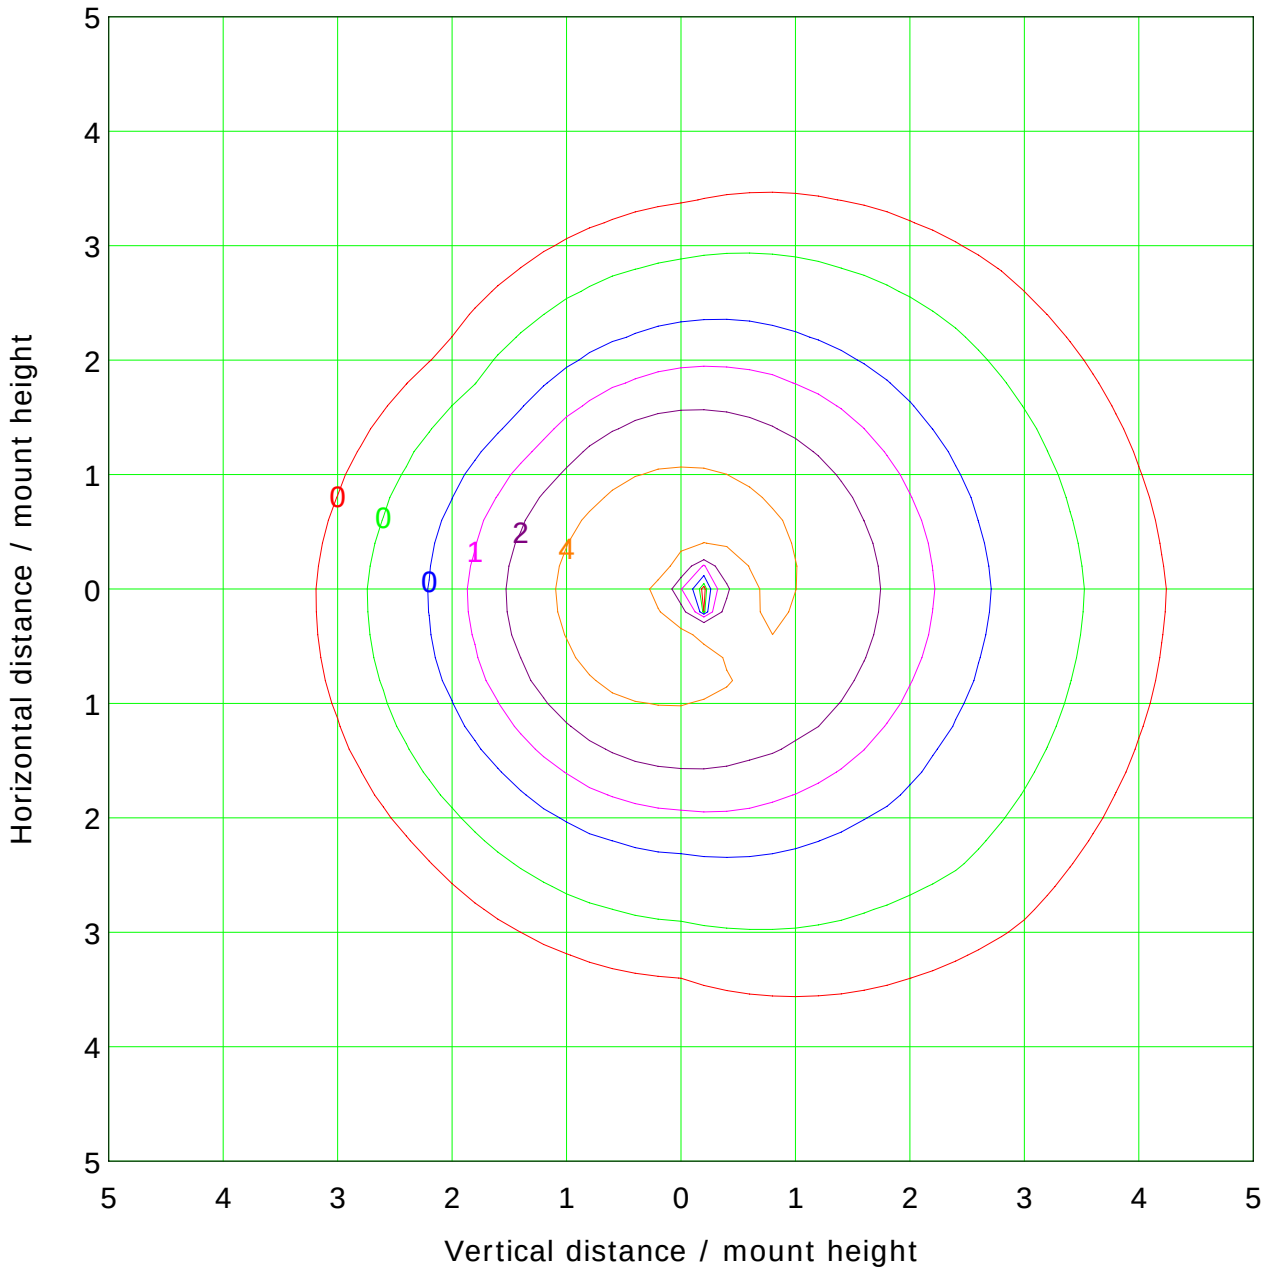


Mounting Height: 5.0m Max Lux(100%): 8.9 lx

(1%): 0.1 lx	(2%): 0.2 lx
(5%): 0.4 lx	(10%): 0.9 lx
(20%): 1.8 lx	(50%): 4.5 lx
(100%): 8.9 lx	

C Plane (°):0.0-360.0: 45.0
Test Lab: NINGBO LED LIGHTING
Test Type: TYPE C
Temperature: 25°C
Operator: DING LI

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.583 m
Humidity:
Inspector:

Illuminance at a Distance

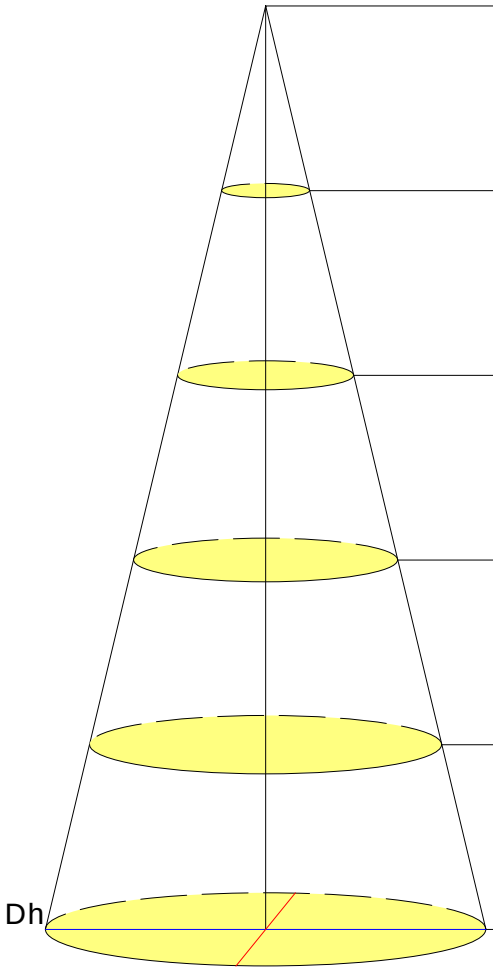

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	0.22	5.42/4.64	25.9	22.06
2.0	0.05	10.85/9.27	103.6	5.51
3.0	0.02	16.27/13.91	233.1	2.45
4.0	0.01	21.70/18.55	414.3	1.38
5.0	0.01	27.12/23.19	647.4	0.88

Beam Angle(B): H139.5 V133.3 Field Angle(F): H200.1 V164.6

C Plane (°):0.0-360.0: 45.0
Test Lab: NINGBO LED LIGHTING
Test Type: TYPE C
Temperature: 25°C
Operator: DING LI

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.583 m
Humidity:
Inspector:

UGR Table

Reflectance:										
Ceiling (cavity)	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
X=2H Y=2H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
3H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
4H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
6H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
8H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
12H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
X=4H Y=2H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
3H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
4H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
6H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
8H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
12H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
X=8H Y=4H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
6H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
8H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
12H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
X=12H Y=4H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
6H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
8H	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$	-1.$
Variations with the observer position at spacings:										
S=1.0H	-1.$/-1.$					-1.$/-1.$				
S=1.5H	-1.$/-1.$					-1.$/-1.$				
S=2.0H	-1.$/-1.$					-1.$/-1.$				

Calculate in accordance with CIE Pub.117. The table is revised with 1405lm (8log(F/F0) = 1.2).

C Plane (°):0.0-360.0: 45.0
Test Lab: NINGBO LED LIGHTING
Test Type: TYPE C
Temperature: 25°C
Operator: DING LI

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.583 m
Humidity:
Inspector:

Candlepower Table

Unit: cd

G\C	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0	C360.0	
G0.0	0.2	1.0	22.8	23.0	0.2	1.0	22.8	23.0	0.2	
G1.0	0.8	1.5	21.5	9.8	0.0	0.6	22.1	30.8	0.8	
G2.0	1.3	2.0	22.8	3.2	0.0	0.2	24.6	34.7	1.3	
G3.0	2.1	2.6	25.0	2.5	0.0	0.0	26.8	45.6	2.1	
G4.0	2.9	6.7	26.0	2.0	0.0	0.0	28.3	48.4	2.9	
G5.0	14.9	20.3	30.9	1.7	0.0	0.0	34.2	56.5	14.9	
G6.0	27.6	28.5	33.8	1.4	0.0	0.0	36.9	71.7	27.6	
G7.0	37.2	35.4	38.2	1.1	0.0	0.0	39.6	78.5	37.2	
G8.0	40.7	45.3	39.6	1.0	0.0	0.0	41.8	94.5	40.7	
G9.0	49.8	49.1	46.3	1.0	0.0	0.0	48.3	100.1	49.8	
G10.0	66.3	63.3	49.3	0.9	0.0	0.4	49.4	108.3	66.3	
G11.0	79.3	74.7	54.3	1.1	0.0	0.6	68.8	129.6	79.3	
G12.0	88.6	91.7	68.6	1.2	0.0	0.9	72.6	148.4	88.6	
G13.0	100.9	101.1	74.1	1.4	0.0	1.2	82.3	154.3	100.9	
G14.0	111.0	107.1	89.2	1.6	0.2	1.7	91.5	162.6	111.0	
G15.0	126.6	122.2	96.1	1.9	0.8	6.5	98.9	169.9	126.6	
G16.0	140.3	134.8	100.3	2.2	1.3	25.3	109.3	186.6	140.3	
G17.0	145.7	145.5	114.4	6.1	1.8	32.8	123.1	209.5	145.7	
G18.0	160.1	155.1	127.3	18.2	4.6	42.2	127.8	213.5	160.1	
G19.0	189.6	169.9	131.7	31.0	21.9	47.1	141.9	213.8	189.6	
G20.0	201.9	186.7	139.1	34.7	32.8	48.8	149.2	223.9	201.9	
G21.0	203.4	206.9	155.6	40.3	38.5	64.1	165.2	242.9	203.4	
G22.0	214.8	211.1	167.9	39.1	48.1	86.3	171.3	260.3	214.8	
G23.0	221.7	222.7	180.1	54.4	55.1	96.4	182.6	266.8	221.7	
G24.0	239.3	240.2	192.6	70.8	74.2	101.8	203.9	285.5	239.3	
G25.0	259.2	247.6	200.1	76.5	91.9	117.1	218.2	289.5	259.2	
G26.0	273.2	251.9	210.3	81.3	98.1	127.6	232.8	294.6	273.2	
G27.0	293.9	261.0	217.7	89.2	103.8	134.4	237.5	305.5	293.9	
G28.0	293.2	272.8	236.5	89.1	120.3	144.6	242.5	323.4	293.2	
G29.0	299.6	296.7	252.8	106.9	143.0	176.2	246.8	333.1	299.6	
G30.0	303.0	312.6	252.3	134.7	153.4	183.8	263.3	333.9	303.0	
G31.0	314.2	311.4	272.9	136.5	156.6	190.3	281.9	332.7	314.2	
G32.0	320.8	317.9	281.3	149.9	174.3	193.2	287.3	350.3	320.8	
G33.0	328.2	324.5	284.9	153.2	193.7	206.1	292.5	352.5	328.2	
G34.0	341.4	328.9	283.5	173.5	210.0	223.5	299.6	356.3	341.4	
G35.0	353.7	340.1	280.7	167.2	215.6	246.4	313.0	360.5	353.7	
G36.0	364.7	346.6	287.6	169.8	231.3	257.4	324.8	363.1	364.7	

C Plane (°):0.0-360.0: 45.0
Test Lab: NINGBO LED LIGHTING
Test Type: TYPE C
Temperature: 25°C
Operator: DING LI

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.583 m
Humidity:
Inspector:

Candlepower Table (Continue 1)

Unit: cd

G\C	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0	C360.0	
G37.0	370.6	348.5	289.1	173.6	249.6	273.9	331.8	367.8	370.6	
G38.0	366.5	358.3	296.4	209.4	253.7	279.0	329.6	370.2	366.5	
G39.0	364.0	366.5	317.1	232.7	274.9	285.9	331.4	372.2	364.0	
G40.0	367.7	367.9	329.6	243.9	286.2	290.4	336.0	371.2	367.7	
G41.0	378.7	369.1	328.7	251.9	296.5	294.4	351.6	363.6	378.7	
G42.0	374.6	371.2	327.5	245.3	302.3	315.7	348.9	356.9	374.6	
G43.0	371.7	375.3	332.9	260.0	307.6	331.1	353.0	350.0	371.7	
G44.0	376.5	377.1	332.7	273.0	307.2	333.7	345.7	344.9	376.5	
G45.0	371.1	372.3	323.5	268.0	316.9	346.2	344.8	342.0	371.1	
G46.0	365.4	369.0	313.2	292.6	324.4	351.9	356.4	337.1	365.4	
G47.0	361.2	365.3	322.1	310.3	331.4	353.2	356.0	329.6	361.2	
G48.0	354.0	361.6	328.4	326.5	358.2	352.6	352.8	323.5	354.0	
G49.0	349.4	359.4	338.0	337.6	366.5	355.1	349.8	318.2	349.4	
G50.0	341.8	355.1	336.0	333.1	367.6	367.8	343.7	311.0	341.8	
G51.0	332.3	346.9	331.2	321.7	364.6	367.7	332.7	298.6	332.3	
G52.0	323.6	337.9	308.1	329.5	360.7	367.8	325.1	287.6	323.6	
G53.0	310.7	327.6	302.8	349.3	376.6	356.7	313.3	271.2	310.7	
G54.0	296.8	308.8	302.1	334.1	378.8	357.1	304.3	257.3	296.8	
G55.0	285.3	296.7	293.9	324.6	374.6	351.4	300.1	248.5	285.3	
G56.0	274.4	283.4	300.6	322.3	375.6	344.6	292.5	236.3	274.4	
G57.0	261.0	271.6	290.8	325.4	374.6	341.1	284.2	225.4	261.0	
G58.0	250.8	260.0	282.7	343.0	369.5	336.8	275.4	215.0	250.8	
G59.0	241.4	246.6	266.0	344.3	366.4	328.0	264.2	203.5	241.4	
G60.0	229.7	238.4	239.4	339.6	361.0	320.8	248.2	190.5	229.7	
G61.0	217.7	229.6	235.3	324.0	353.6	312.6	238.8	176.3	217.7	
G62.0	204.6	217.6	232.5	309.9	347.9	309.4	231.9	164.7	204.6	
G63.0	192.1	208.1	228.5	293.4	340.8	305.6	227.0	154.0	192.1	
G64.0	180.1	187.1	215.1	292.7	334.3	295.2	210.5	142.0	180.1	
G65.0	166.1	175.9	198.4	285.7	326.9	283.8	196.2	130.4	166.1	
G66.0	155.1	162.9	182.2	278.4	318.3	270.4	186.1	115.3	155.1	
G67.0	144.7	151.9	171.4	268.6	305.0	254.0	178.0	107.8	144.7	
G68.0	129.9	142.3	157.2	263.1	289.3	238.5	170.0	96.1	129.9	
G69.0	118.6	125.9	149.9	242.0	274.1	229.6	147.0	84.1	118.6	
G70.0	109.8	113.9	142.0	243.6	264.1	218.4	134.8	75.7	109.8	
G71.0	96.7	104.9	126.6	234.4	252.0	206.8	124.7	68.7	96.7	
G72.0	88.0	94.3	113.6	225.3	240.7	197.8	111.4	61.7	88.0	
G73.0	79.3	84.0	106.5	208.4	231.6	184.1	101.4	54.6	79.3	

C Plane (°):0.0-360.0: 45.0
Test Lab: NINGBO LED LIGHTING
Test Type: TYPE C
Temperature: 25°C
Operator: DING LI

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.583 m
Humidity:
Inspector:

Candlepower Table (Continue 2)

Unit: cd

G\C	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0	C360.0	
G74.0	69.5	76.4	94.9	205.9	220.0	173.4	91.2	48.0	69.5	
G75.0	59.8	68.5	86.9	192.4	207.4	158.6	81.7	41.8	59.8	
G76.0	53.2	59.6	79.3	181.3	193.0	147.2	73.2	37.7	53.2	
G77.0	44.6	52.3	67.9	168.3	180.5	133.5	63.3	35.3	44.6	
G78.0	40.3	47.2	60.3	156.7	165.7	122.1	53.7	34.8	40.3	
G79.0	36.9	41.7	54.6	141.6	153.8	112.3	49.9	34.0	36.9	
G80.0	35.4	35.8	48.1	128.9	143.4	98.4	45.6	33.8	35.4	
G81.0	34.6	34.9	41.9	113.5	129.2	88.9	39.5	33.6	34.6	
G82.0	34.1	34.2	37.6	107.3	118.3	77.9	35.9	33.5	34.1	
G83.0	33.9	33.6	34.2	97.8	108.7	69.1	32.8	33.5	33.9	
G84.0	33.7	33.4	31.2	86.0	95.9	61.4	30.5	33.6	33.7	
G85.0	33.8	33.2	28.8	77.0	86.7	55.7	29.5	33.8	33.8	
G86.0	33.8	33.2	28.1	69.3	78.0	51.1	29.1	34.1	33.8	
G87.0	34.0	33.3	27.5	62.9	67.2	45.2	28.9	34.3	34.0	
G88.0	34.3	33.5	27.0	54.4	59.1	41.4	28.8	34.5	34.3	
G89.0	34.5	33.7	26.7	50.9	52.8	37.6	28.8	34.9	34.5	
G90.0	35.0	33.9	26.5	46.1	43.9	35.1	28.7	35.0	35.0	
G91.0	35.1	34.2	26.4	41.6	38.8	33.8	28.8	35.5	35.1	
G92.0	35.5	34.5	26.3	39.2	35.7	33.2	28.8	35.9	35.5	
G93.0	35.9	34.8	26.3	35.8	34.4	32.9	28.8	36.3	35.9	
G94.0	36.2	35.1	26.4	33.7	33.5	32.7	29.0	36.9	36.2	
G95.0	37.0	35.5	26.5	33.1	33.1	32.6	29.0	36.9	37.0	
G96.0	36.9	35.9	26.5	32.4	32.8	32.7	29.3	37.4	36.9	
G97.0	37.3	36.3	26.5	31.9	32.7	32.8	29.5	37.8	37.3	
G98.0	37.9	36.8	26.6	31.7	32.7	33.0	29.7	38.3	37.9	
G99.0	38.5	36.8	26.8	31.7	32.9	33.2	30.0	38.8	38.5	
G100.0	38.7	37.7	27.1	31.7	33.1	33.5	30.2	38.7	38.7	
G101.0	38.9	38.0	27.2	31.7	33.3	33.9	30.4	39.3	38.9	
G102.0	39.5	38.7	27.5	31.9	33.6	34.1	30.7	39.6	39.5	
G103.0	40.0	38.6	27.8	32.0	33.9	34.4	30.9	40.1	40.0	
G104.0	40.4	39.2	28.0	32.3	34.3	34.8	31.2	40.4	40.4	
G105.0	40.7	39.5	28.2	32.5	34.6	35.0	31.4	40.7	40.7	
G106.0	41.1	39.9	28.3	32.8	35.1	35.4	31.7	40.9	41.1	
G107.0	41.3	40.3	28.6	33.0	35.3	35.8	31.9	41.2	41.3	
G108.0	39.6	40.5	28.7	33.3	35.7	36.3	32.1	41.5	39.6	
G109.0	37.4	40.9	28.9	33.7	36.0	36.8	32.3	41.5	37.4	
G110.0	35.7	41.1	28.9	34.0	34.8	36.8	32.6	41.9	35.7	

C Plane (°):0.0-360.0: 45.0
Test Lab: NINGBO LED LIGHTING
Test Type: TYPE C
Temperature: 25°C
Operator: DING LI

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.583 m
Humidity:
Inspector:

Candlepower Table (Continue 3)

Unit: cd

G\C	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0	C360.0	
G111.0	34.0	41.4	28.9	34.3	34.0	37.3	32.7	42.2	34.0	
G112.0	32.2	41.5	28.8	34.8	33.0	37.7	32.9	42.4	32.2	
G113.0	30.6	41.8	28.6	35.1	31.6	38.0	33.1	42.5	30.6	
G114.0	28.9	42.0	28.4	35.5	29.9	38.6	33.1	42.5	28.9	
G115.0	27.1	42.3	28.3	35.7	28.0	38.6	33.3	42.5	27.1	
G116.0	27.0	42.3	28.3	36.0	26.3	38.6	33.2	42.4	27.0	
G117.0	27.5	42.3	28.3	36.5	24.1	39.1	33.1	42.4	27.5	
G118.0	27.9	42.3	28.2	36.8	23.7	39.5	33.0	42.4	27.9	
G119.0	28.3	42.3	28.1	36.9	24.0	39.7	33.0	42.5	28.3	
G120.0	28.8	42.3	28.0	36.9	24.4	39.9	32.8	42.0	28.8	
G121.0	29.1	42.3	27.8	36.9	24.8	40.1	32.6	41.5	29.1	
G122.0	29.4	42.3	27.6	36.8	25.3	40.1	32.0	41.0	29.4	
G123.0	29.6	42.2	27.4	36.9	25.5	40.3	31.7	40.4	29.6	
G124.0	29.6	41.6	27.2	36.9	25.9	40.5	31.3	39.6	29.6	
G125.0	29.6	41.1	26.8	36.9	26.5	40.4	30.9	38.8	29.6	
G126.0	29.6	40.4	26.5	36.9	26.8	40.3	30.2	38.0	29.6	
G127.0	29.4	39.8	25.6	36.9	27.2	40.3	29.5	36.9	29.4	
G128.0	29.1	38.7	24.7	37.3	27.5	40.2	28.8	36.2	29.1	
G129.0	28.8	38.5	24.1	37.4	27.9	39.9	27.4	35.1	28.8	
G130.0	28.3	37.2	23.1	37.4	28.3	39.5	26.1	34.2	28.3	
G131.0	27.9	36.7	22.0	37.4	28.6	39.3	24.5	33.0	27.9	
G132.0	27.4	35.5	20.6	37.3	28.9	38.6	22.9	32.1	27.4	
G133.0	26.7	34.3	19.1	37.0	29.2	38.6	21.2	30.7	26.7	
G134.0	26.1	33.4	18.6	36.9	29.5	38.2	19.5	29.7	26.1	
G135.0	25.4	32.3	18.4	36.9	29.7	37.7	18.5	28.5	25.4	
G136.0	24.7	31.3	18.1	36.9	29.8	36.8	17.8	27.4	24.7	
G137.0	23.9	30.1	17.8	36.9	29.8	36.4	17.5	26.3	23.9	
G138.0	23.1	28.9	17.4	36.2	29.7	35.6	17.0	24.9	23.1	
G139.0	22.2	27.8	16.9	35.8	29.6	35.0	16.6	23.8	22.2	
G140.0	21.5	26.6	16.5	35.1	29.4	34.1	16.2	22.5	21.5	
G141.0	20.6	25.4	16.0	34.5	29.2	33.1	15.8	21.3	20.6	
G142.0	19.8	24.2	15.5	33.9	28.8	32.3	15.3	20.1	19.8	
G143.0	18.8	22.9	14.9	33.2	28.4	31.3	14.8	18.8	18.8	
G144.0	17.9	21.7	14.5	32.5	27.9	30.5	14.3	17.7	17.9	
G145.0	17.0	20.6	13.9	31.8	27.3	29.6	13.7	16.5	17.0	
G146.0	16.0	19.3	13.3	31.1	26.8	28.5	13.0	15.3	16.0	
G147.0	15.1	18.2	12.6	30.4	26.1	27.6	12.4	14.2	15.1	

C Plane (°):0.0-360.0: 45.0
Test Lab: NINGBO LED LIGHTING
Test Type: TYPE C
Temperature: 25°C
Operator: DING LI

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.583 m
Humidity:
Inspector:

Candlepower Table (Continue 4)

Unit: cd

G\C	C0.0	C45.0	C90.0	C135.0	C180.0	C225.0	C270.0	C315.0	C360.0	
G148.0	14.2	17.0	12.1	29.7	25.4	26.5	11.7	13.0	14.2	
G149.0	13.1	15.7	11.4	28.9	24.7	25.6	10.8	11.8	13.1	
G150.0	12.3	14.6	10.7	28.1	24.0	24.5	10.2	10.6	12.3	
G151.0	11.3	13.4	10.2	27.3	23.2	23.5	9.4	9.4	11.3	
G152.0	10.3	12.1	9.6	26.3	22.2	22.5	8.7	8.4	10.3	
G153.0	9.4	11.0	9.0	25.4	21.5	21.6	8.0	7.4	9.4	
G154.0	8.4	9.9	8.4	24.3	20.6	20.6	7.3	6.4	8.4	
G155.0	7.5	8.8	7.9	23.2	19.7	19.8	6.8	5.6	7.5	
G156.0	6.7	7.9	7.5	22.3	18.9	18.9	6.4	4.7	6.7	
G157.0	5.8	6.8	7.1	21.2	17.9	18.0	6.0	4.0	5.8	
G158.0	4.9	5.9	6.7	20.0	17.0	17.2	5.6	3.3	4.9	
G159.0	4.1	5.0	6.4	18.8	16.1	16.2	5.2	2.4	4.1	
G160.0	3.3	4.2	6.1	17.7	15.2	15.2	5.0	1.8	3.3	
G161.0	2.6	3.5	5.8	16.4	14.3	14.4	4.7	1.2	2.6	
G162.0	1.9	2.6	5.5	15.2	13.2	13.3	4.4	0.7	1.9	
G163.0	1.4	1.9	5.2	14.1	12.2	12.4	4.1	0.2	1.4	
G164.0	0.8	1.2	5.1	13.0	11.2	11.4	3.9	0.0	0.8	
G165.0	0.3	0.6	4.8	11.8	10.3	10.4	3.7	0.0	0.3	
G166.0	0.0	0.2	4.5	10.8	9.4	9.4	3.5	0.0	0.0	
G167.0	0.0	0.0	4.3	9.7	8.4	8.4	3.3	0.0	0.0	
G168.0	0.0	0.0	4.0	8.8	7.5	7.5	3.2	0.0	0.0	
G169.0	0.0	0.0	3.7	8.0	6.7	6.6	3.0	0.0	0.0	
G170.0	0.0	0.0	3.4	7.1	5.8	5.7	2.9	0.0	0.0	
G171.0	0.0	0.0	2.9	6.3	5.0	4.8	2.8	0.0	0.0	
G172.0	0.0	0.0	2.7	5.5	4.2	3.8	2.4	0.0	0.0	
G173.0	0.0	0.0	2.1	4.7	3.4	3.1	2.2	0.0	0.0	
G174.0	0.0	0.0	1.7	3.8	2.7	2.4	1.9	0.0	0.0	
G175.0	0.0	0.0	1.1	2.8	1.9	1.7	1.4	0.0	0.0	
G176.0	0.0	0.0	0.6	2.0	1.2	1.1	1.0	0.0	0.0	
G177.0	0.0	0.0	0.0	1.1	0.6	0.5	0.5	0.0	0.0	
G178.0	0.0	0.0	0.0	0.3	0.0	0.0	0.1	0.0	0.0	
G179.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
G180.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	

C Plane (°):0.0-360.0: 45.0
Test Lab: NINGBO LED LIGHTING
Test Type: TYPE C
Temperature: 25°C
Operator: DING LI

Gamma Plane (°):0.0-180.0:1.0
Test Device: GPM-1600L
Distance: 6.583 m
Humidity:
Inspector: