IES Indoor Report
Photometric Filename:HCP-238401-5K.IES

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Indoor Luminaire Photometric Data


Description Information

Luminary Name: HCP-238401-5K(20W)		Lum. Catelog:	Test ID: 001
Lamp Name:		Lamp Catelog: LED	Test Date: 2019/04/12
Manufacture:		Shld.Ang(°):	Test Machine:GON-2000
Test Lab: Volnic IES		Frequency(Hz):	Lamp CCT(K): Ra:
Lum.Size(W*L*H):0.075m*1.200m*0.000m		Lum.Area(m2):0.090	Lum.W(kg): 0.500
Test System: C, γ	Test Step: C=30.0 γ=1.0	Temp.(℃): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 1731.530	Luminary Flux(lm): 1731.529	Field Angle(10%Imax): 201.3(°)
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 1611.524lm 93.07%
Rated Voltage(V):	Luminary EER(lm/W): 85.508	Up Lumens&Percent: 120.004lm 6.93%
Tested Power(W): 20.250	Max.Candela(cd): 512.595	S/MH: C0_a180=1.280 C90_270=1.271
Lamps' Inside: 1	Max Cand@Ang.(°): C=0.0 γ=1.0	CIE Type: Semi-Direct
Tested Electrics(V,A,pf):240.0,0.099,0.851	Beam Angle(50%Imax): 119.5(°)	ErP Φuse(120°): 1176.282lm
Lamp Size(W*L*H):0.075m*1.200m*0.000m	Left=-59.2° ,Right=60.4°	IRF(%): 107.013

C Plane Distribution Diagram

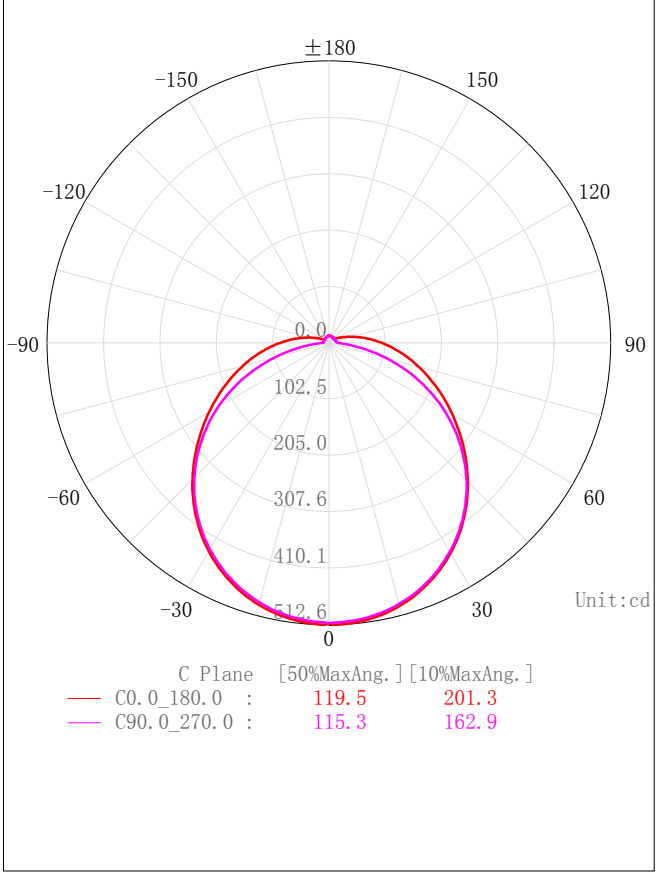

C0 Space ISO Illuminance Curve

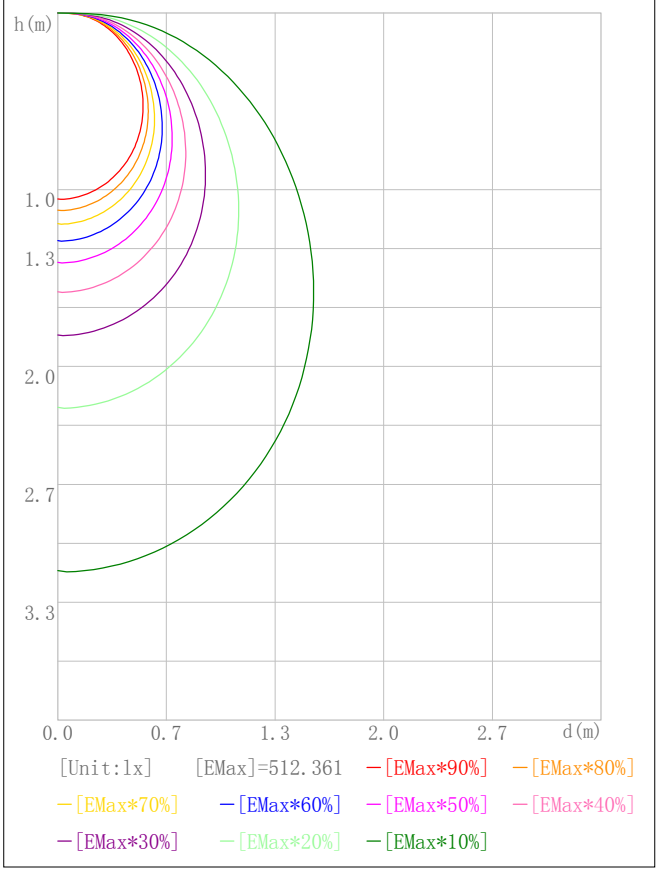


IES Indoor Report
Photometric Filename:HCP-238401-5K.IES


HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

2D Plane Light Intensity Distribution Curve

Lum.Name: HCP-238401-5K(20W)	Lum.Catelog:	Test ID: 001
Lamp Name:	Lamp Catelog: LED	Test Lab: Volnic IES
Manufacture:	Test Machine:GON-2000	Test Date: 2019/04/12

C Plane Distribution Diagram

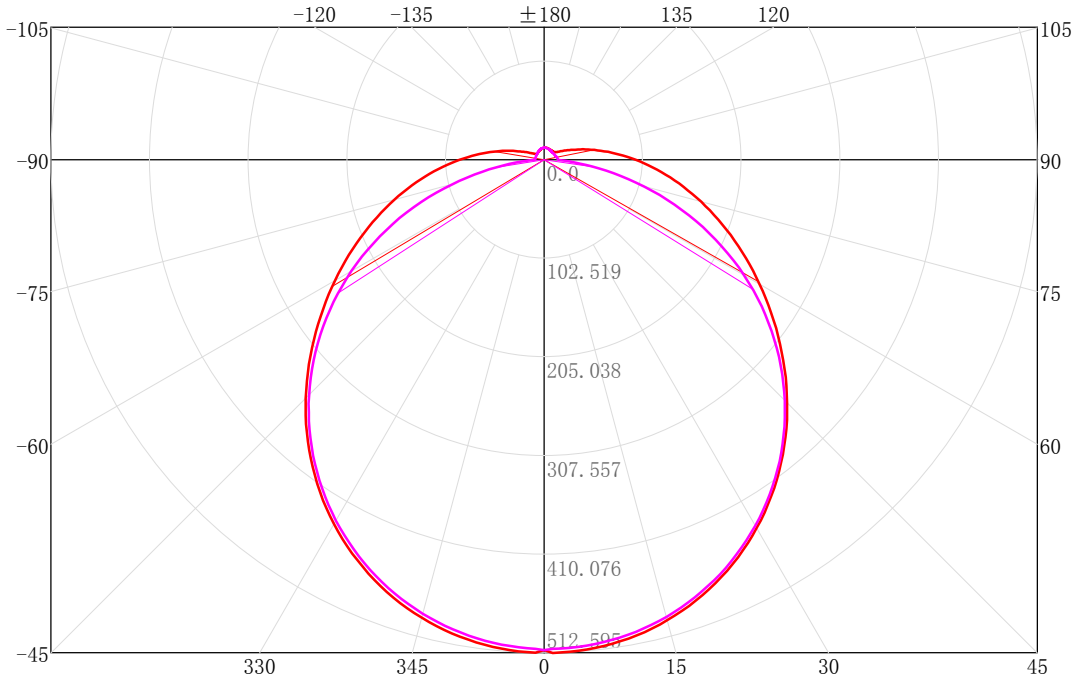

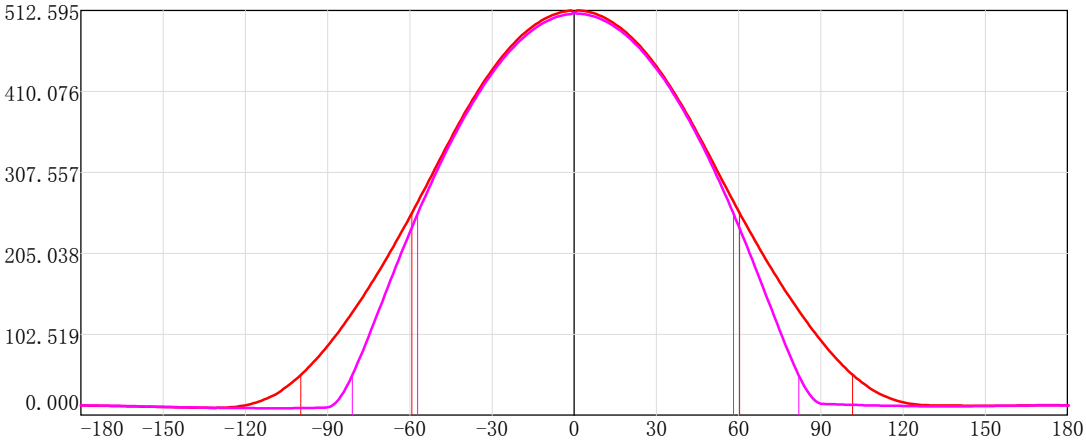

C Plane	[50%MaxAng.]	[10%MaxAng.]	Unit:cd
C0.0_180.0 :	119.5	201.3	
C90.0_270.0 :	115.3	162.9	


IES Indoor Report
Photometric Filename:HCP-238401-5K.IES

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

3D Light Intensity Distribution Modal

Lum.Name: HCP-238401-5K(20W)	Lum.Catelog:	Test ID: 001
Lamp Name:	Lamp Catelog: LED	Test Lab: Volnic IES
Manufacture:	Test Machine:GON-2000	Test Date: 2019/04/12

3D Light Intensity Distribution Modal

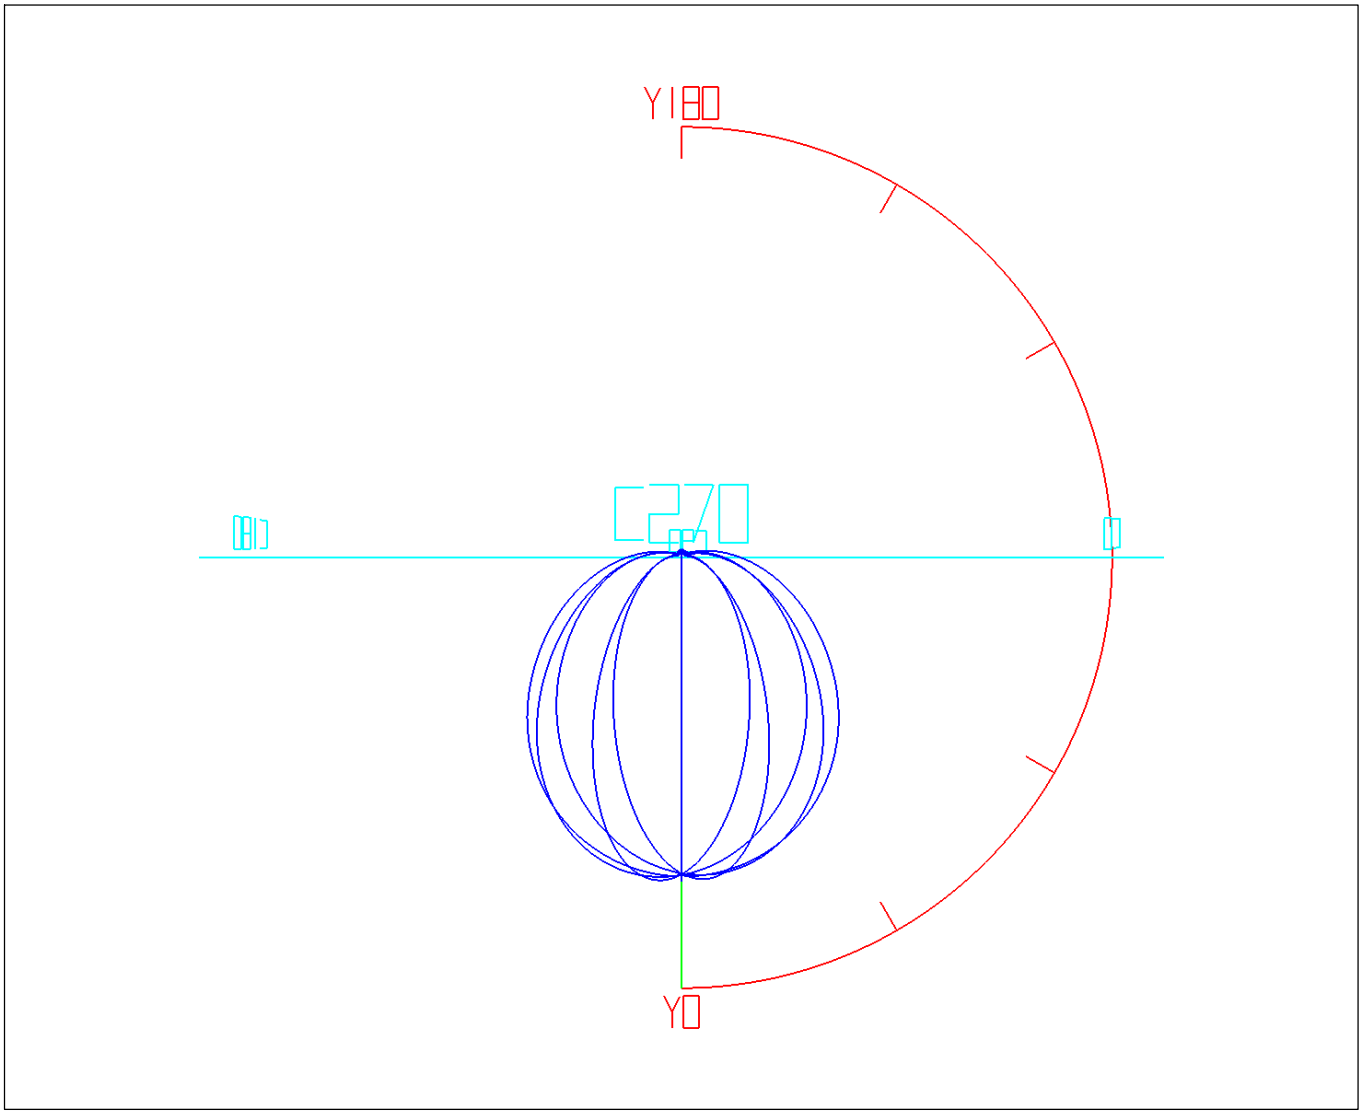

Curves: 3D Model Fixture Vert. HUD Hori. HUD

View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

IES Indoor Report
Photometric Filename:HCP-238401-5K.IES

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Zonal Flux Tabulation

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.49	0.49	0.03	0.03	47.0-48.0	26.98	872.30	1.56	50.38
1.0-2.0	1.46	1.95	0.08	0.11	48.0-49.0	26.84	899.14	1.55	51.93
2.0-3.0	2.43	4.38	0.14	0.25	49.0-50.0	26.67	925.81	1.54	53.47
3.0-4.0	3.40	7.78	0.20	0.45	50.0-51.0	26.46	952.27	1.53	55.00
4.0-5.0	4.37	12.15	0.25	0.70	51.0-52.0	26.22	978.50	1.51	56.51
5.0-6.0	5.33	17.48	0.31	1.01	52.0-53.0	25.96	1004.46	1.50	58.01
6.0-7.0	6.28	23.76	0.36	1.37	53.0-54.0	25.67	1030.12	1.48	59.49
7.0-8.0	7.22	30.98	0.42	1.79	54.0-55.0	25.34	1055.47	1.46	60.96
8.0-9.0	8.16	39.14	0.47	2.26	55.0-56.0	24.99	1080.46	1.44	62.40
9.0-10.0	9.08	48.22	0.52	2.78	56.0-57.0	24.62	1105.08	1.42	63.82
10.0-11.0	9.99	58.21	0.58	3.36	57.0-58.0	24.21	1129.29	1.40	65.22
11.0-12.0	10.90	69.11	0.63	3.99	58.0-59.0	23.78	1153.07	1.37	66.59
12.0-13.0	11.78	80.89	0.68	4.67	59.0-60.0	23.33	1176.40	1.35	67.94
13.0-14.0	12.65	93.54	0.73	5.40	60.0-61.0	22.86	1199.26	1.32	69.26
14.0-15.0	13.51	107.05	0.78	6.18	61.0-62.0	22.37	1221.64	1.29	70.55
15.0-16.0	14.35	121.40	0.83	7.01	62.0-63.0	21.86	1243.50	1.26	71.81
16.0-17.0	15.16	136.56	0.88	7.89	63.0-64.0	21.33	1264.83	1.23	73.05
17.0-18.0	15.97	152.53	0.92	8.81	64.0-65.0	20.78	1285.61	1.20	74.25
18.0-19.0	16.75	169.27	0.97	9.78	65.0-66.0	20.22	1305.83	1.17	75.41
19.0-20.0	17.50	186.78	1.01	10.79	66.0-67.0	19.65	1325.48	1.13	76.55
20.0-21.0	18.24	205.02	1.05	11.84	67.0-68.0	19.06	1344.54	1.10	77.65
21.0-22.0	18.95	223.97	1.09	12.93	68.0-69.0	18.46	1363.00	1.07	78.72
22.0-23.0	19.64	243.61	1.13	14.07	69.0-70.0	17.85	1380.85	1.03	79.75
23.0-24.0	20.30	263.91	1.17	15.24	70.0-71.0	17.24	1398.09	1.00	80.74
24.0-25.0	20.94	284.85	1.21	16.45	71.0-72.0	16.62	1414.70	0.96	81.70
25.0-26.0	21.55	306.40	1.24	17.70	72.0-73.0	15.99	1430.70	0.92	82.63
26.0-27.0	22.13	328.53	1.28	18.97	73.0-74.0	15.37	1446.07	0.89	83.51
27.0-28.0	22.68	351.21	1.31	20.28	74.0-75.0	14.74	1460.81	0.85	84.37
28.0-29.0	23.21	374.42	1.34	21.62	75.0-76.0	14.11	1474.92	0.81	85.18
29.0-30.0	23.70	398.12	1.37	22.99	76.0-77.0	13.48	1488.41	0.78	85.96
30.0-31.0	24.17	422.28	1.40	24.39	77.0-78.0	12.86	1501.27	0.74	86.70
31.0-32.0	24.60	446.89	1.42	25.81	78.0-79.0	12.25	1513.52	0.71	87.41
32.0-33.0	25.00	471.89	1.44	27.25	79.0-80.0	11.65	1525.17	0.67	88.08
33.0-34.0	25.37	497.26	1.47	28.72	80.0-81.0	11.05	1536.23	0.64	88.72
34.0-35.0	25.71	522.97	1.48	30.20	81.0-82.0	10.47	1546.70	0.60	89.33
35.0-36.0	26.01	548.97	1.50	31.70	82.0-83.0	9.90	1556.59	0.57	89.90
36.0-37.0	26.28	575.25	1.52	33.22	83.0-84.0	9.34	1565.93	0.54	90.44
37.0-38.0	26.52	601.77	1.53	34.75	84.0-85.0	8.80	1574.73	0.51	90.94
38.0-39.0	26.72	628.48	1.54	36.30	85.0-86.0	8.29	1583.02	0.48	91.42
39.0-40.0	26.88	655.36	1.55	37.85	86.0-87.0	7.80	1590.82	0.45	91.87
40.0-41.0	27.01	682.38	1.56	39.41	87.0-88.0	7.33	1598.15	0.42	92.30
41.0-42.0	27.11	709.49	1.57	40.97	88.0-89.0	6.89	1605.04	0.40	92.69
42.0-43.0	27.18	736.67	1.57	42.54	89.0-90.0	6.49	1611.52	0.37	93.07
43.0-44.0	27.21	763.88	1.57	44.12	90.0-91.0	6.11	1617.63	0.35	93.42
44.0-45.0	27.20	791.08	1.57	45.69	91.0-92.0	5.75	1623.39	0.33	93.75
45.0-46.0	27.16	818.24	1.57	47.26	92.0-93.0	5.41	1628.80	0.31	94.07
46.0-47.0	27.08	845.32	1.56	48.82	93.0-94.0	5.08	1633.88	0.29	94.36

IES Indoor Report
Photometric Filename:HCP-238401-5K.IES

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Zonal Flux Tabulation - (Cont.)

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	4.76	1638.64	0.28	94.64
95.0-96.0	4.46	1643.11	0.26	94.89
96.0-97.0	4.18	1647.29	0.24	95.13
97.0-98.0	3.92	1651.21	0.23	95.36
98.0-99.0	3.67	1654.87	0.21	95.57
99.0-100.0	3.43	1658.30	0.20	95.77
100.0-101.0	3.21	1661.51	0.19	95.96
101.0-102.0	3.00	1664.52	0.17	96.13
102.0-103.0	2.81	1667.33	0.16	96.29
103.0-104.0	2.64	1669.96	0.15	96.44
104.0-105.0	2.47	1672.43	0.14	96.59
105.0-106.0	2.30	1674.73	0.13	96.72
106.0-107.0	2.14	1676.87	0.12	96.84
107.0-108.0	2.00	1678.87	0.12	96.96
108.0-109.0	1.89	1680.76	0.11	97.07
109.0-110.0	1.78	1682.54	0.10	97.17
110.0-111.0	1.69	1684.23	0.10	97.27
111.0-112.0	1.60	1685.83	0.09	97.36
112.0-113.0	1.52	1687.35	0.09	97.45
113.0-114.0	1.45	1688.80	0.08	97.53
114.0-115.0	1.38	1690.18	0.08	97.61
115.0-116.0	1.33	1691.51	0.08	97.69
116.0-117.0	1.27	1692.78	0.07	97.76
117.0-118.0	1.22	1694.01	0.07	97.83
118.0-119.0	1.18	1695.19	0.07	97.90
119.0-120.0	1.14	1696.33	0.07	97.97
120.0-121.0	1.10	1697.43	0.06	98.03
121.0-122.0	1.07	1698.50	0.06	98.09
122.0-123.0	1.04	1699.54	0.06	98.15
123.0-124.0	1.01	1700.55	0.06	98.21
124.0-125.0	0.99	1701.54	0.06	98.27
125.0-126.0	0.97	1702.51	0.06	98.32
126.0-127.0	0.95	1703.46	0.05	98.38
127.0-128.0	0.94	1704.40	0.05	98.43
128.0-129.0	0.92	1705.32	0.05	98.49
129.0-130.0	0.91	1706.23	0.05	98.54
130.0-131.0	0.89	1707.12	0.05	98.59
131.0-132.0	0.88	1708.00	0.05	98.64
132.0-133.0	0.87	1708.87	0.05	98.69
133.0-134.0	0.85	1709.72	0.05	98.74
134.0-135.0	0.84	1710.57	0.05	98.79
135.0-136.0	0.83	1711.40	0.05	98.84
136.0-137.0	0.82	1712.21	0.05	98.88
137.0-138.0	0.80	1713.02	0.05	98.93
138.0-139.0	0.79	1713.81	0.05	98.98
139.0-140.0	0.78	1714.59	0.04	99.02
140.0-141.0	0.76	1715.35	0.04	99.07
141.0-142.0	0.75	1716.10	0.04	99.11
142.0-143.0	0.73	1716.83	0.04	99.15
143.0-144.0	0.72	1717.55	0.04	99.19
144.0-145.0	0.71	1718.26	0.04	99.23
145.0-146.0	0.69	1718.95	0.04	99.27
146.0-147.0	0.68	1719.63	0.04	99.31
147.0-148.0	0.66	1720.29	0.04	99.35
148.0-149.0	0.65	1720.93	0.04	99.39
149.0-150.0	0.63	1721.56	0.04	99.42
150.0-151.0	0.61	1722.18	0.04	99.46
151.0-152.0	0.60	1722.77	0.03	99.49
152.0-153.0	0.58	1723.35	0.03	99.53
153.0-154.0	0.56	1723.92	0.03	99.56
154.0-155.0	0.55	1724.46	0.03	99.59
155.0-156.0	0.53	1724.99	0.03	99.62
156.0-157.0	0.51	1725.50	0.03	99.65
157.0-158.0	0.49	1725.99	0.03	99.68
158.0-159.0	0.47	1726.47	0.03	99.71
159.0-160.0	0.45	1726.92	0.03	99.73
160.0-161.0	0.44	1727.36	0.03	99.76
161.0-162.0	0.42	1727.77	0.02	99.78
162.0-163.0	0.39	1728.17	0.02	99.81
163.0-164.0	0.37	1728.54	0.02	99.83
164.0-165.0	0.35	1728.90	0.02	99.85
165.0-166.0	0.33	1729.23	0.02	99.87
166.0-167.0	0.31	1729.54	0.02	99.89
167.0-168.0	0.29	1729.83	0.02	99.90
168.0-169.0	0.27	1730.10	0.02	99.92
169.0-170.0	0.25	1730.35	0.01	99.93
170.0-171.0	0.22	1730.57	0.01	99.94
171.0-172.0	0.20	1730.77	0.01	99.96
172.0-173.0	0.18	1730.95	0.01	99.97
173.0-174.0	0.15	1731.10	0.01	99.98
174.0-175.0	0.13	1731.23	0.01	99.98
175.0-176.0	0.11	1731.34	0.01	99.99
176.0-177.0	0.08	1731.42	0.00	99.99
177.0-178.0	0.06	1731.48	0.00	100.00
178.0-179.0	0.04	1731.52	0.00	100.00
179.0-180.0	0.01	1731.53	0.00	100.00


IES Indoor Report
Photometric Filename:HCP-238401-5K.IES

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Rectangle ISO Lighting Intensity Diagram

Lum.Name: HCP-238401-5K(20W)	Lum.Catelog:	Test ID: 001
Lamp Name:	Lamp Catelog: LED	Test Lab: Volnic IES
Manufacture:	Test Machine:GON-2000	Test Date: 2019/04/12

ISO Lighting Intensity Curve

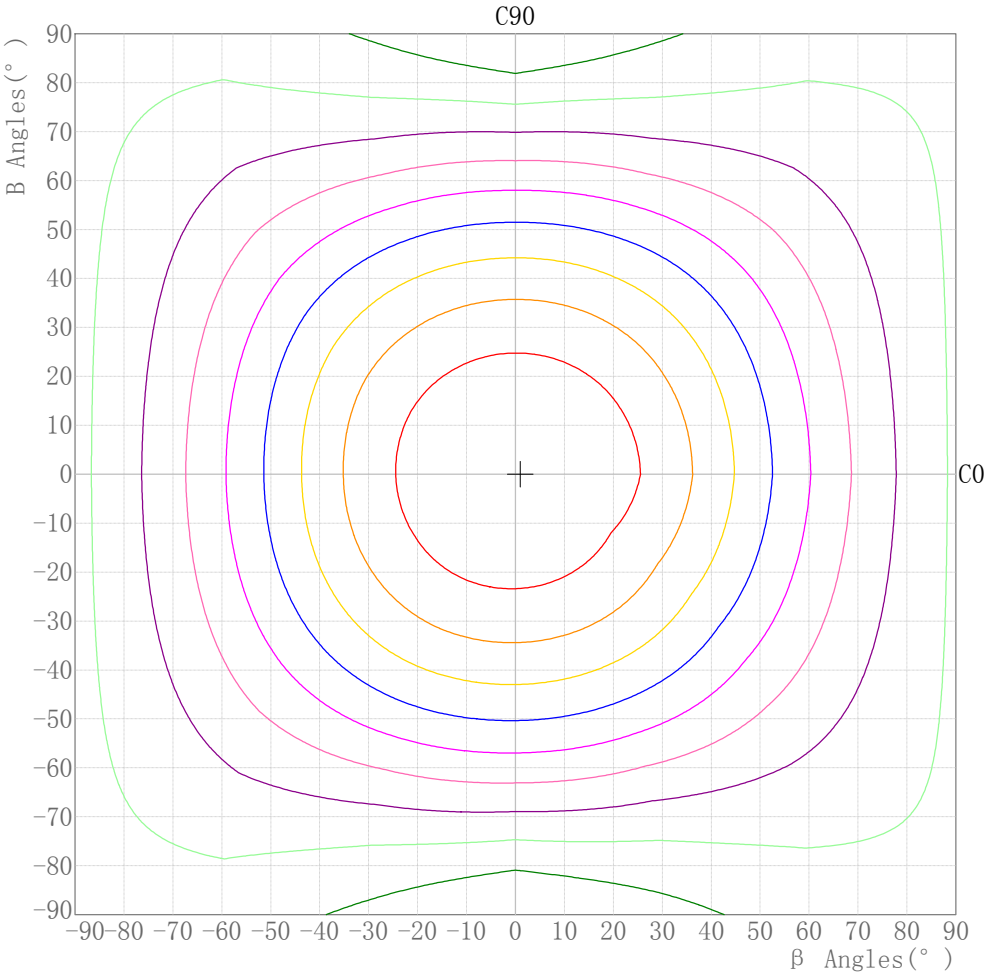

Curves:
[Unit: cd]
[IMax] =512.595
[IMax*90%]=461.335
[IMax*80%]=410.076
[IMax*70%]=358.816
[IMax*60%]=307.557
[IMax*50%]=256.297
[IMax*40%]=205.038
[IMax*30%]=153.778
[IMax*20%]=102.519
[IMax*10%]=51.259

Maximum Light Intensity(cd): 512.59
Maximum Cand.@Angle: H=1.0°,V=0.0°


IES Indoor Report
Photometric Filename:HCP-238401-5K.IES

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Plane ISO-Illuminance Diagram

Lum.Name: HCP-238401-5K(20W)	Lum.Catelog:	Test ID: 001
Lamp Name:	Lamp Catelog: LED	Test Lab: Volnic IES
Manufacture:	Test Machine:GON-2000	Test Date: 2019/04/12

Plane ISO-Illuminance Curve

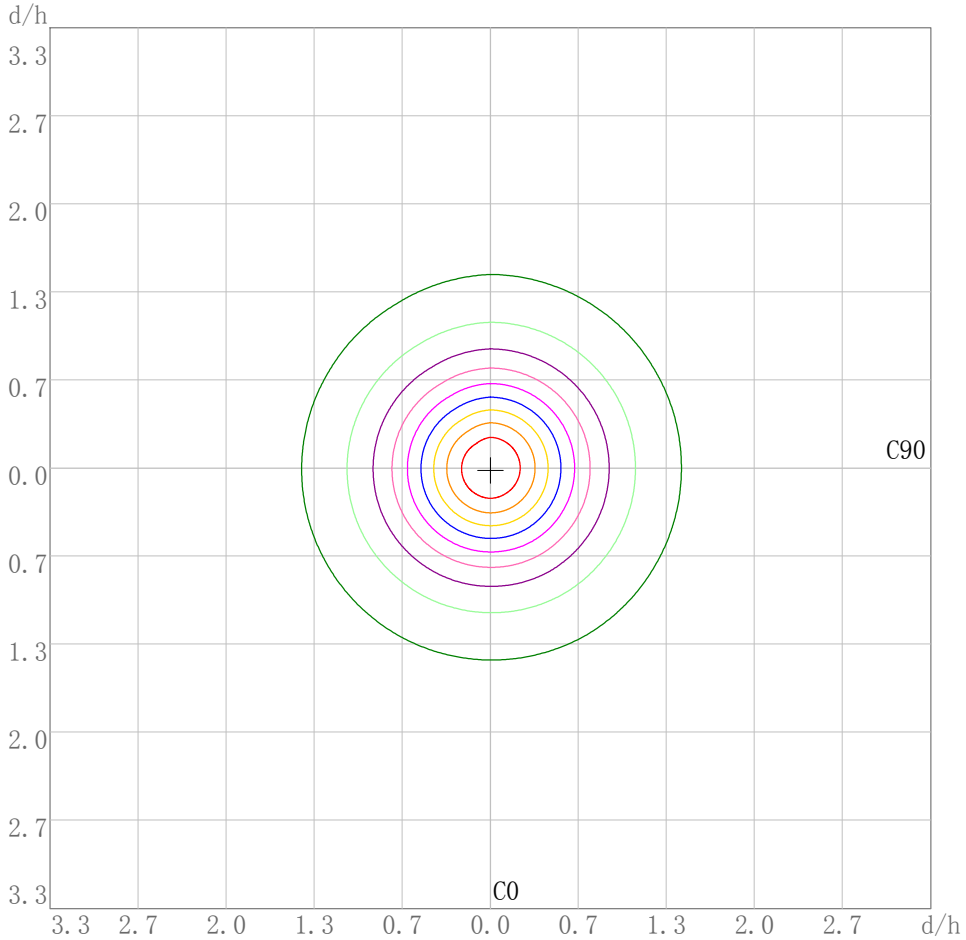

Curves:
unit:lx
[EMax] =56.929
[EMax*90%]=51.236
[EMax*80%]=45.543
[EMax*70%]=39.850
[EMax*60%]=34.157
[EMax*50%]=28.464
[EMax*40%]=22.772
[EMax*30%]=17.079
[EMax*20%]=11.386
[EMax*10%]=5.693

Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 56.93
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0


IES Indoor Report
Photometric Filename:HCP-238401-5K.IES

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

3D Plane ISO Illuminance Diagram

Lum.Name: HCP-238401-5K(20W)	Lum.Catelog:	Test ID: 001
Lamp Name:	Lamp Catelog: LED	Test Lab: Volnic IES
Manufacture:	Test Machine:GON-2000	Test Date: 2019/04/12

3D Plane Illuminance Modal

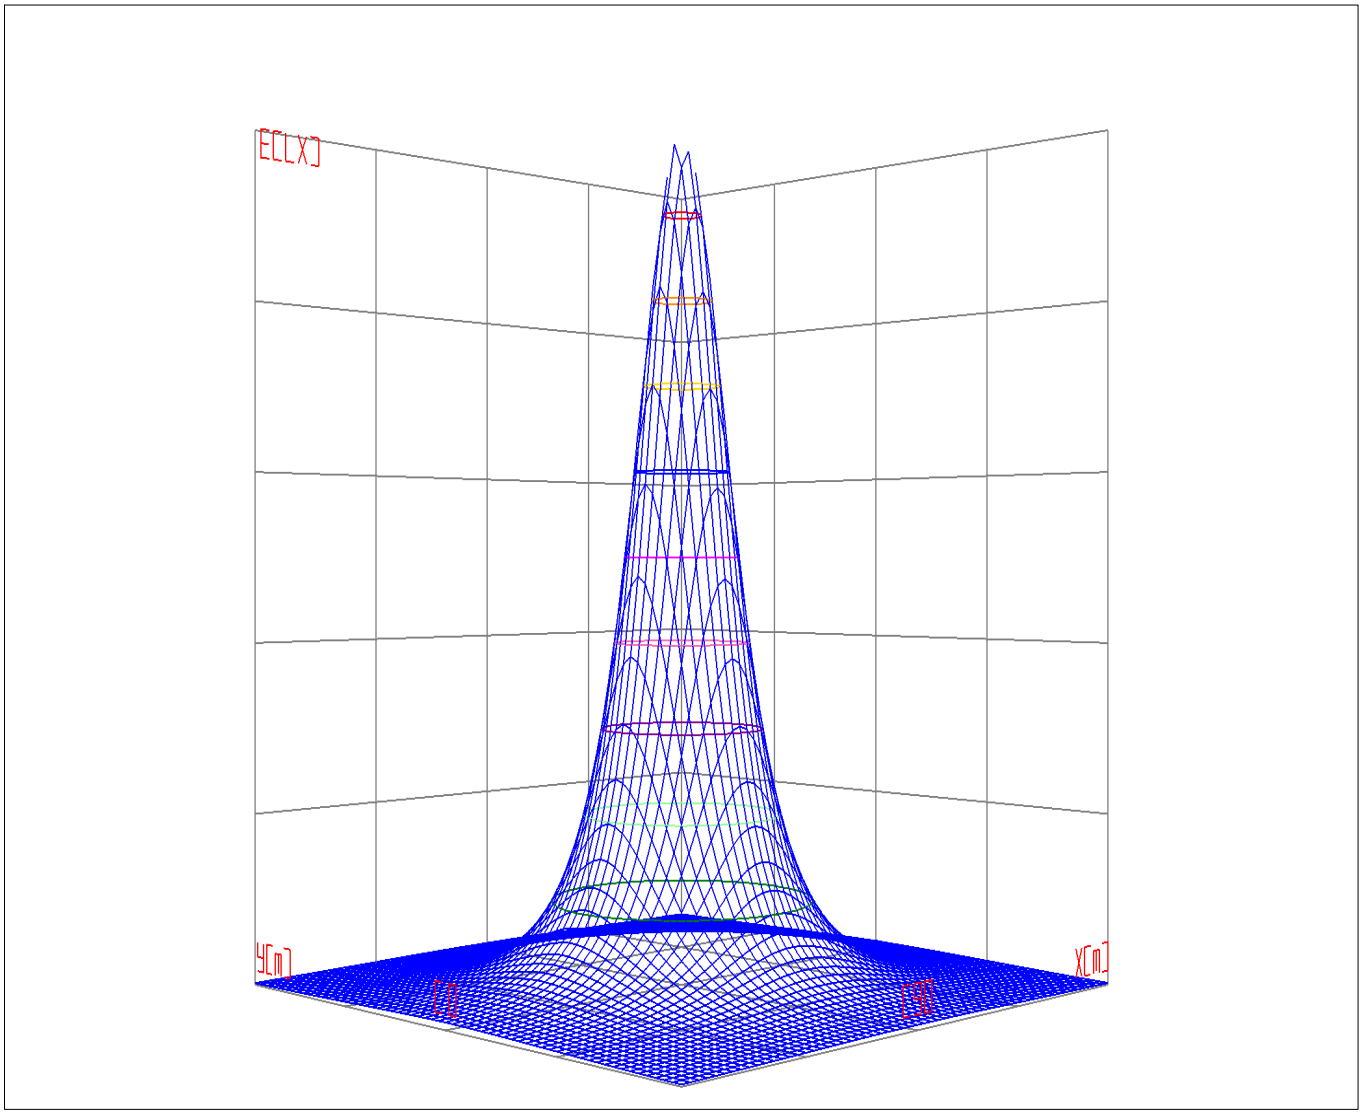

Curves: 3D Model 90% 80% 70% 60% 50% 40% 30% 20% 10%
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0


IES Indoor Report
Photometric Filename:HCP-238401-5K.IES

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Space ISO Illuminance Diagram

Lum.Name: HCP-238401-5K(20W)	Lum.Catelog:	Test ID: 001
Lamp Name:	Lamp Catelog: LED	Test Lab: Volnic IES
Manufacture:	Test Machine:GON-2000	Test Date: 2019/04/12

Space ISO Illuminance Curve

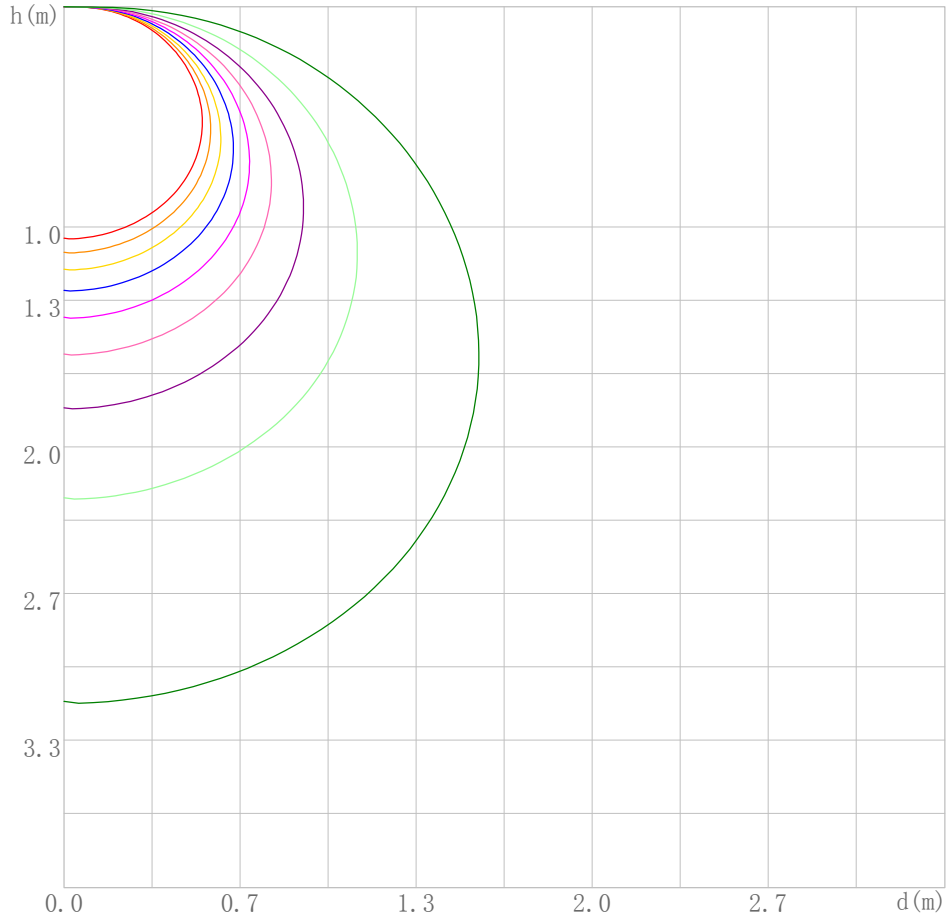

Curves:
[Unit: lx]
[EMax] =512.361
[EMax*90%]=461.125
[EMax*80%]=409.889
[EMax*70%]=358.653
[EMax*60%]=307.416
[EMax*50%]=256.180
[EMax*40%]=204.944
[EMax*30%]=153.708
[EMax*20%]=102.472
[EMax*10%]=51.236

Space Plane Maximum Illuminance and @Angle:512.36lx,1.0deg
Plane Maximum Lighting Intensity and @Angle:512.595cd,0eg


IES Indoor Report
Photometric Filename:HCP-238401-5K.IES

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Illuminance-Distance Diagram

Lum.Name: HCP-238401-5K(20W)	Lum.Catelog:	Test ID: 001
Lamp Name:	Lamp Catelog: LED	Test Lab: Volnic IES
Manufacture:	Test Machine:GON-2000	Test Date: 2019/04/12

Illuminance-Distance Curve

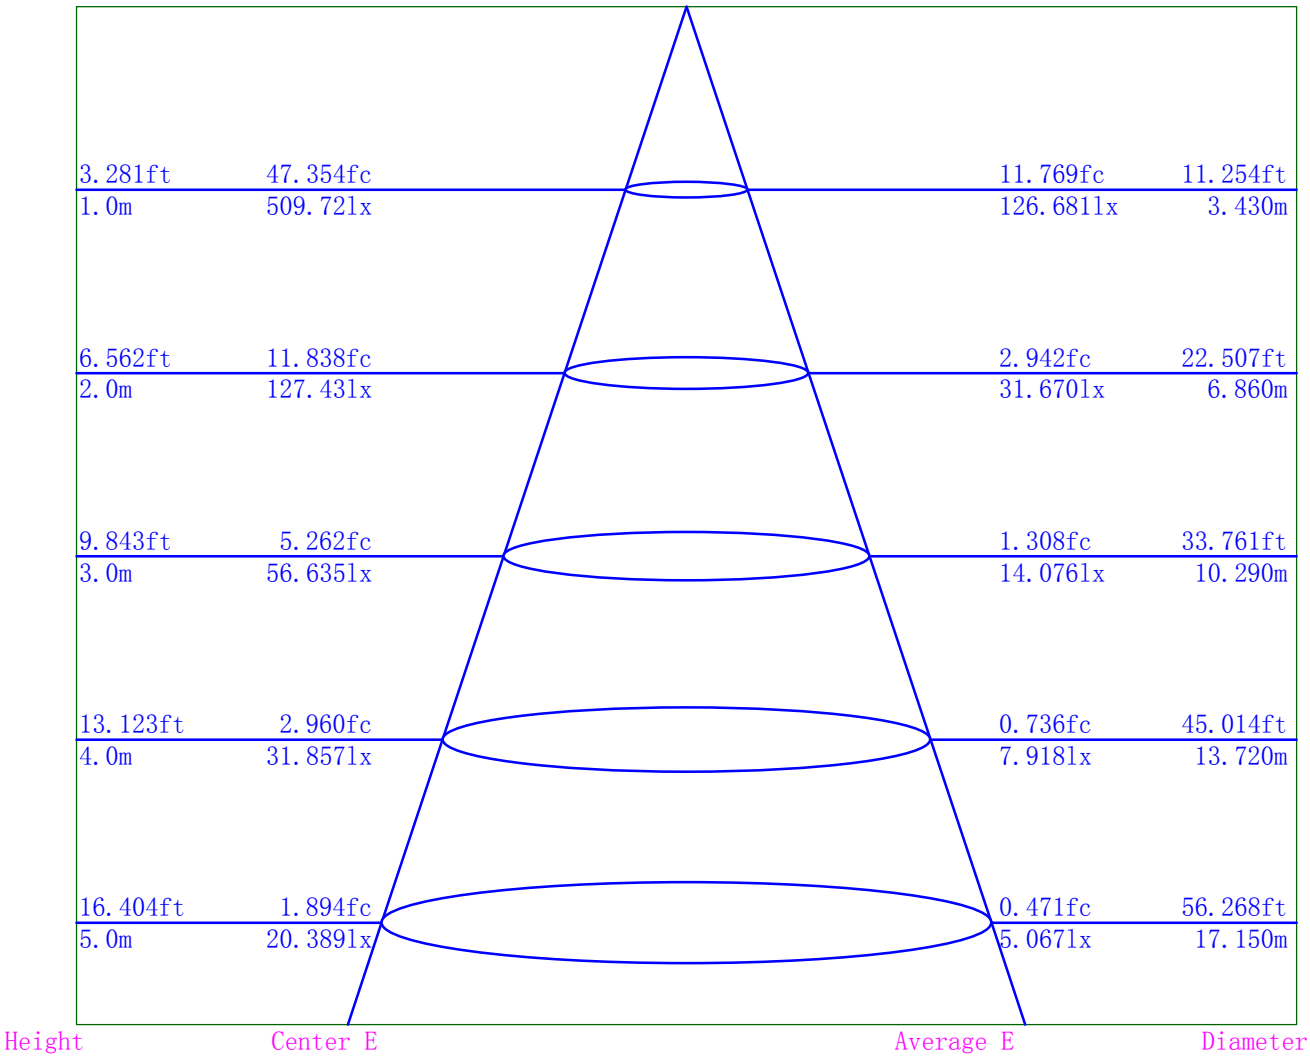

Beam Angle:119.5

IES Indoor Report
Photometric Filename:HCP-238401-5K.IES

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Indoor Luminance Limiting Curves

Lum.Name: HCP-238401-5K(20W)	Lum.Catelog:	Test ID: 001
Lamp Name:	Lamp Catelog: LED	Test Lab: Volnic IES
Manufacture:	Test Machine:GON-2000	Test Date: 2019/04/12


Glare Grade Table

GI	Quality	Using Illuminace							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	5612	5609	5640	5746	5974	6407	7252	9115	15023
C90	5557	5507	5434	5329	5175	4948	4622	4190	3974

Luminance Limiting Curve

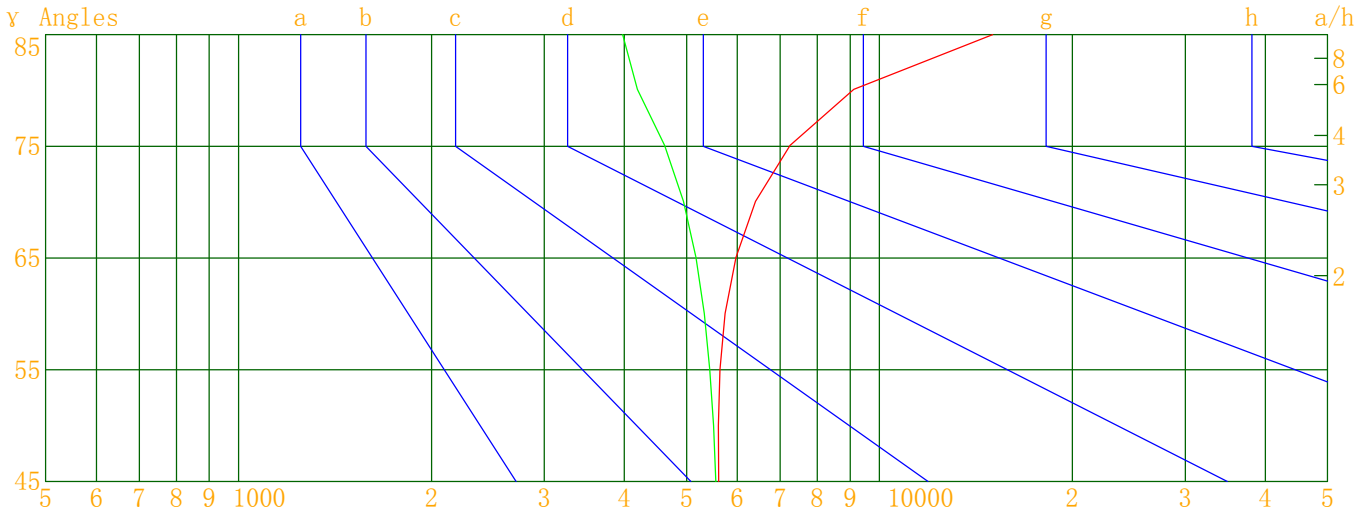


Luminous Size: Length(m)=1.200 Width(m)=0.075 Height(m)=0.000 Area(m^2)=0.090000
Luminous Type: Without Luminous Side
Luminous Curves: C0-C180 Color: ——— C90-C270 Color: ———

IES Indoor Report
Photometric Filename:HCP-238401-5K.IES

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Indoor Budgetary Estimate Table

Lum.Name: HCP-238401-5K(20W)	Lum.Catelog:	Test ID: 001
Lamp Name:	Lamp Catelog: LED	Test Lab: Volnic IES
Manufacture:	Test Machine:GON-2000	Test Date: 2019/04/12

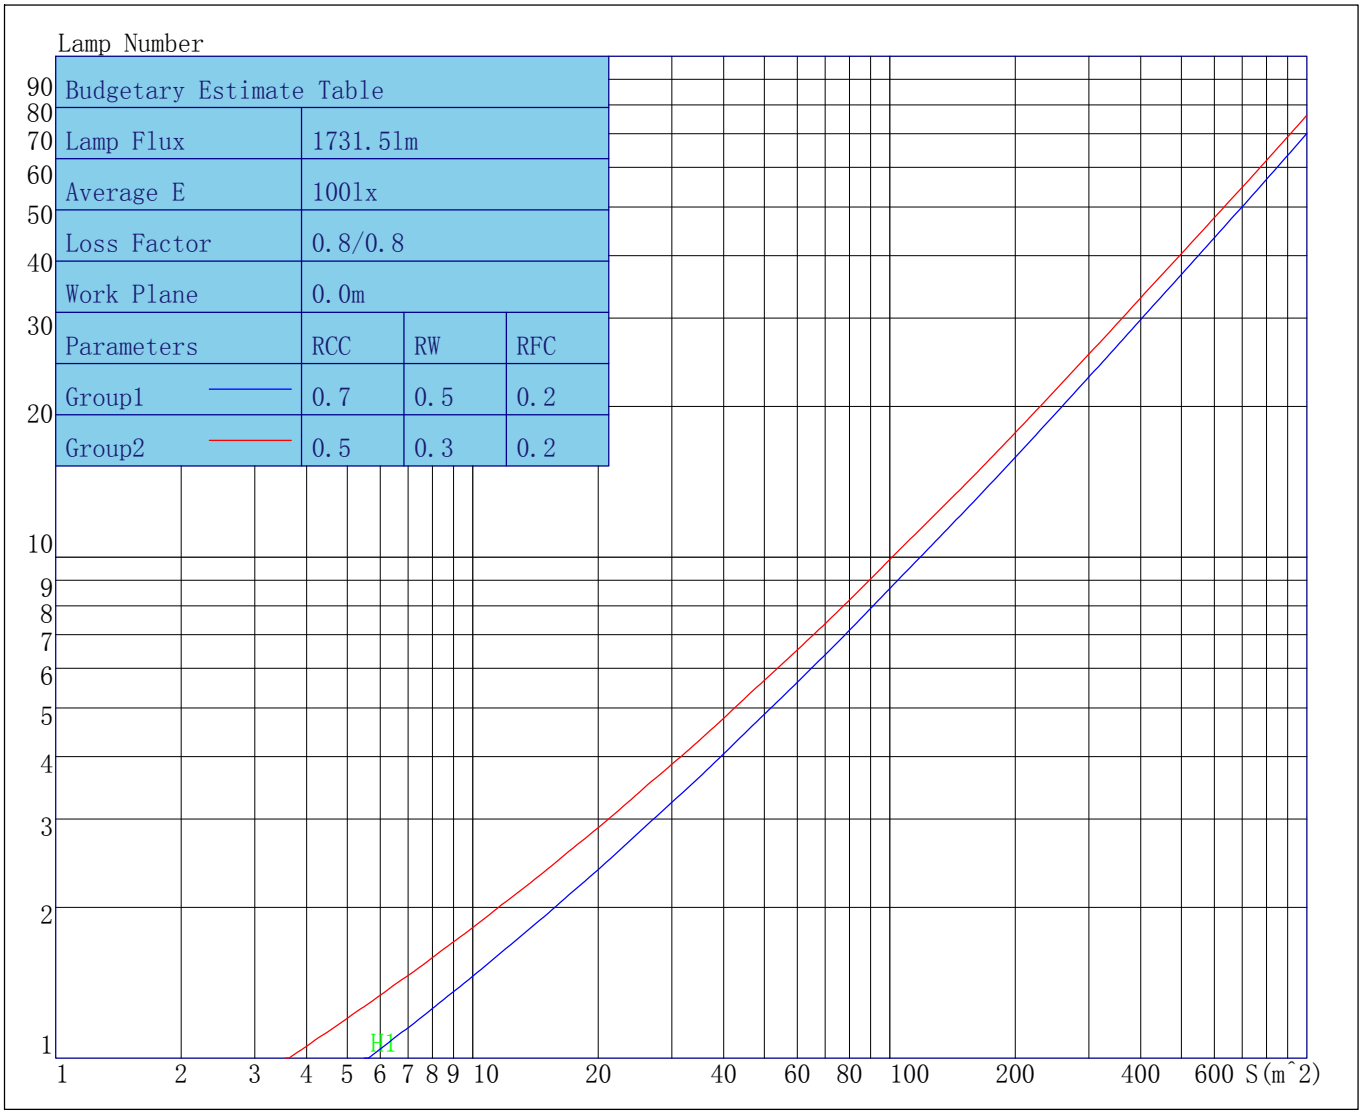

Parameters1: Rhocc = 0.7 Rhow = 0.5 Rhofc = 0.2 LLF = 0.8
Parameters2: Rhocc = 0.5 Rhow = 0.3 Rhofc = 0.2 LLF = 0.8
Average Illuminance(lx): 100 Cavity Height: H1(m) = 2

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Indoor Coefficient of Utilization Table

Lum.Name: HCP-238401-5K(20W)	Lum.Catelog:	Test ID: 001
Lamp Name:	Lamp Catelog: LED	Test Lab: Volnic IES
Manufacture:	Test Machine:GON-2000	Test Date: 2019/04/12

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC(%)	80				70				50			30			10			0
RhoW(%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	117	117	117	117	114	114	114	114	107	107	107	101	101	101	96	96	96	93
1	106	100	95	91	102	97	93	89	92	88	85	86	83	81	82	79	77	75
2	95	86	79	73	92	84	77	71	79	74	69	75	70	66	71	67	64	61
3	87	75	67	60	84	73	65	59	69	63	57	66	60	55	62	57	53	51
4	79	67	57	50	76	65	56	50	61	54	48	58	52	47	55	50	45	43
5	73	59	50	43	70	58	49	43	55	47	41	52	46	40	50	44	39	37
6	67	53	44	38	65	52	43	37	49	42	36	47	40	35	45	39	34	32
7	62	48	39	33	60	47	39	33	45	37	32	43	36	31	41	35	31	28
8	58	44	35	29	56	43	35	29	41	34	28	39	33	28	38	32	27	25
9	54	40	32	26	52	39	31	26	38	31	26	36	30	25	35	29	25	23
10	51	37	29	24	49	36	29	24	35	28	23	33	27	23	32	26	22	20

IES Indoor Report
Photometric Filename:HCP-238401-5K.IES

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Unified Glare Rating Table

Lum.Name: HCP-238401-5K(20W)	Lum.Catelog:	Test ID: 001
Lamp Name:	Lamp Catelog: LED	Test Lab: Volnic IES
Manufacture:	Test Machine:GON-2000	Test Date: 2019/04/12

Unified Glare Rating Table

Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	17.8	19.4	18.3	19.8	20.3	17.7	19.2	18.1	19.6	20.1
	Y=3H	20.0	21.4	20.5	21.9	22.4	19.4	20.8	19.9	21.2	21.8
	Y=4H	21.1	22.5	21.6	22.9	23.5	20.1	21.4	20.6	21.9	22.4
	Y=6H	22.4	23.6	22.9	24.1	24.6	20.6	21.9	21.2	22.4	22.9
	Y=8H	23.0	24.2	23.6	24.7	25.3	20.8	22.0	21.4	22.5	23.1
	Y=12H	23.8	24.9	24.3	25.4	26.0	21.0	22.1	21.5	22.6	23.2
X=4H	Y=2H	18.6	19.9	19.1	20.4	20.9	18.5	19.8	19.0	20.3	20.8
	Y=3H	21.0	22.1	21.5	22.6	23.2	20.4	21.6	20.9	22.1	22.6
	Y=4H	22.3	23.3	22.8	23.8	24.4	21.3	22.3	21.8	22.9	23.5
	Y=6H	23.7	24.6	24.3	25.2	25.8	22.0	22.9	22.6	23.5	24.1
	Y=8H	24.5	25.3	25.0	25.9	26.5	22.3	23.1	22.9	23.7	24.3
	Y=12H	25.4	26.1	25.9	26.7	27.3	22.5	23.3	23.1	23.9	24.5
X=8H	Y=4H	22.7	23.5	23.2	24.1	24.7	21.9	22.7	22.4	23.3	23.9
	Y=6H	24.3	25.0	24.9	25.7	26.4	22.8	23.6	23.4	24.2	24.9
	Y=8H	25.3	25.9	25.9	26.5	27.2	23.3	23.9	23.9	24.5	25.2
	Y=12H	26.4	27.0	27.0	27.6	28.3	23.6	24.2	24.3	24.8	25.5
X=12H	Y=4H	22.7	23.5	23.3	24.1	24.7	22.0	22.8	22.6	23.4	24.0
	Y=6H	24.5	25.1	25.1	25.7	26.4	23.1	23.8	23.7	24.3	25.0
	Y=8H	25.5	26.1	26.1	26.7	27.4	23.6	24.2	24.3	24.8	25.5
Variations with the objerver position at spacings											
S=1.0H		0.1/-0.1					0.4/-0.4				
S=1.5H		0.2/-0.2					0.6/-0.7				
S=2.0H		0.1/-0.2					0.7/-0.9				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		4.8					3.6				

o the CIE Pub.117,data has been corrected,refers to the lamp's lumens 8.2flm.

IES Indoor Report
Photometric Filename:HCP-238401-5K.IES

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Candela Tabulation

V/H	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0	C300.0	C330.0
Y 0.0	509.72	509.72	509.72	509.72	509.72	509.72	509.72	509.72	509.72	509.72	509.72	509.72
Y 1.0	512.59	510.21	509.17	508.36	507.77	507.36	512.43	510.10	509.06	508.23	507.57	507.01
Y 2.0	512.40	510.15	508.98	508.37	507.65	507.24	512.04	509.67	508.68	507.78	507.08	506.72
Y 3.0	512.07	509.81	508.64	507.96	507.39	506.99	511.50	509.26	508.18	507.23	506.58	506.12
Y 4.0	511.60	509.35	508.21	507.53	506.97	506.66	510.81	508.53	507.51	506.60	505.94	505.44
Y 5.0	511.00	508.57	507.73	506.90	506.35	506.06	510.00	507.74	506.81	505.73	505.01	504.48
Y 6.0	510.13	507.87	506.85	506.08	505.59	505.32	509.04	506.76	505.82	504.73	503.98	503.48
Y 7.0	509.19	506.91	505.82	505.14	504.61	504.48	507.83	505.71	504.58	503.58	502.79	502.25
Y 8.0	508.01	505.80	504.76	503.99	503.53	503.36	506.49	504.32	503.27	502.23	501.40	500.82
Y 9.0	506.61	504.47	503.44	502.68	502.24	502.17	504.96	502.84	501.77	500.64	499.86	499.20
Y 10.0	505.16	503.00	501.92	501.21	500.71	500.76	503.29	501.06	500.08	498.94	498.13	497.50
Y 11.0	503.55	501.36	500.27	499.67	499.19	499.25	501.54	499.31	498.29	497.17	496.27	495.59
Y 12.0	501.79	499.57	498.46	497.91	497.39	497.42	499.56	497.39	496.31	495.22	494.31	493.64
Y 13.0	499.77	497.69	496.48	496.00	495.56	495.56	497.34	495.38	494.20	493.11	492.08	491.42
Y 14.0	497.70	495.68	494.37	493.92	493.36	493.61	495.05	492.97	491.82	490.75	489.84	489.06
Y 15.0	495.37	493.35	492.11	491.60	491.17	491.39	492.62	490.58	489.44	488.22	487.37	486.41
Y 16.0	492.89	490.87	489.70	489.16	488.70	488.95	490.01	487.88	486.87	485.61	484.62	483.69
Y 17.0	490.25	488.31	487.11	486.66	486.16	486.39	487.23	485.11	484.10	482.79	481.83	480.93
Y 18.0	487.50	485.52	484.39	483.88	483.50	483.74	484.32	482.26	481.18	479.85	478.87	477.93
Y 19.0	484.54	482.54	481.47	481.03	480.60	480.87	481.19	479.18	478.14	476.72	475.81	474.87
Y 20.0	481.38	479.56	478.34	478.01	477.64	477.89	478.02	475.88	474.91	473.58	472.49	471.49
Y 21.0	478.01	476.29	475.11	474.71	474.43	474.65	474.58	472.48	471.61	470.14	469.00	468.00
Y 22.0	474.71	472.85	471.74	471.32	471.08	471.36	470.96	468.99	467.95	466.60	465.42	464.38
Y 23.0	471.15	469.34	468.22	467.86	467.67	467.85	467.14	465.26	464.28	462.80	461.61	460.58
Y 24.0	467.45	465.69	464.63	464.21	463.92	464.20	463.28	461.40	460.53	458.98	457.72	456.70
Y 25.0	463.54	461.93	460.88	460.40	460.20	460.39	459.21	457.49	456.57	455.01	453.75	452.63
Y 26.0	459.53	457.81	456.71	456.37	456.17	456.46	455.15	453.29	452.41	450.87	449.53	448.46
Y 27.0	455.36	453.62	452.73	452.15	452.07	452.36	450.85	448.95	448.13	446.56	445.22	444.01
Y 28.0	451.02	449.24	448.47	447.85	447.77	448.01	446.33	444.53	443.70	442.10	440.69	439.54
Y 29.0	446.54	444.82	444.01	443.43	443.43	443.69	441.60	439.96	439.14	437.45	436.05	434.79
Y 30.0	441.89	440.25	439.45	439.01	438.82	439.19	436.86	435.33	434.42	432.76	431.22	430.05
Y 31.0	437.22	435.63	434.74	434.36	434.18	434.49	431.98	430.57	429.58	427.86	426.37	425.14
Y 32.0	432.19	430.72	429.89	429.58	429.26	429.58	427.04	425.58	424.68	422.85	421.34	420.13
Y 33.0	427.14	425.64	424.84	424.48	424.32	424.62	421.92	420.38	419.60	417.62	416.10	414.82
Y 34.0	421.96	420.41	419.63	419.31	419.15	419.51	416.46	415.08	414.27	412.30	410.75	409.56
Y 35.0	416.74	415.11	414.42	413.96	413.86	414.20	411.08	409.67	408.80	406.87	405.26	403.98
Y 36.0	411.24	409.76	408.98	408.54	408.50	408.87	405.39	404.18	403.21	401.28	399.60	398.44
Y 37.0	405.66	404.26	403.41	402.98	402.93	403.34	399.75	398.52	397.51	395.72	393.95	392.73
Y 38.0	399.96	398.52	397.76	397.48	397.24	397.65	393.95	392.70	391.79	389.89	388.07	386.91
Y 39.0	394.08	392.65	391.87	391.51	391.36	391.83	388.04	386.75	385.80	383.77	382.03	380.85
Y 40.0	388.24	386.61	385.84	385.52	385.48	385.91	381.97	380.69	379.85	377.71	375.85	374.64
Y 41.0	382.28	380.62	379.82	379.35	379.45	379.91	375.74	374.50	373.53	371.51	369.54	368.55
Y 42.0	376.29	374.48	373.56	373.11	373.19	373.76	369.66	368.36	367.13	365.26	363.21	362.33
Y 43.0	369.97	368.28	367.32	366.74	366.86	367.57	363.28	361.98	360.77	358.66	356.71	355.93
Y 44.0	363.58	361.81	360.75	360.23	360.42	361.16	356.86	355.54	354.27	352.21	350.11	349.45
Y 45.0	357.15	355.37	354.27	353.62	353.73	354.56	350.29	348.92	347.62	345.48	343.36	342.74
Y 46.0	350.70	348.76	347.42	346.77	346.99	348.04	343.72	342.17	340.74	338.62	336.44	336.05

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Candela Tabulation - (Cont.)

V/H	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0	C300.0	C330.0
Y 47.0	344.21	342.02	340.67	339.84	340.24	341.42	337.05	335.48	333.87	331.63	329.42	329.38
Y 48.0	337.73	335.44	333.79	332.99	333.30	334.72	330.37	328.73	326.82	324.56	322.37	322.54
Y 49.0	331.17	328.72	326.69	325.80	326.20	327.89	323.76	321.86	319.74	317.45	315.20	315.76
Y 50.0	324.49	321.72	319.52	318.60	318.97	321.16	317.14	314.95	312.55	310.15	307.93	308.72
Y 51.0	317.77	314.81	312.22	311.15	311.65	314.13	310.29	307.93	305.13	302.63	300.50	301.81
Y 52.0	311.08	307.72	304.91	303.60	304.30	307.10	303.65	300.90	297.65	295.06	293.02	294.77
Y 53.0	304.39	300.72	297.53	296.13	296.87	300.10	296.84	293.98	290.11	287.44	285.45	287.79
Y 54.0	297.90	293.79	289.96	288.41	289.36	293.17	290.26	287.00	282.40	279.74	277.76	280.79
Y 55.0	291.17	286.83	282.13	280.51	281.67	286.18	283.56	279.97	274.78	271.87	270.08	273.79
Y 56.0	284.54	279.79	274.50	272.66	273.95	279.19	277.05	272.97	267.00	264.01	262.27	266.76
Y 57.0	277.97	272.67	266.58	264.48	266.07	272.24	270.44	266.04	259.18	255.94	254.43	259.69
Y 58.0	271.39	265.69	258.80	256.33	258.18	265.22	263.83	258.99	251.31	247.68	246.36	252.65
Y 59.0	264.99	258.70	250.96	248.16	250.22	258.33	257.30	252.07	243.39	239.48	238.31	245.75
Y 60.0	258.57	251.85	243.03	239.80	242.40	251.38	250.81	245.27	235.26	231.13	230.30	238.99
Y 61.0	252.17	244.98	234.93	231.48	234.29	244.71	244.53	238.54	227.33	222.84	222.34	232.18
Y 62.0	245.85	238.19	226.87	222.99	226.14	238.00	238.21	231.94	219.30	214.32	214.28	225.53
Y 63.0	239.62	231.37	218.76	214.34	218.16	231.25	231.88	225.22	211.21	205.74	206.06	218.81
Y 64.0	233.40	224.68	210.80	205.56	210.09	224.51	225.69	218.55	203.11	196.99	197.94	212.17
Y 65.0	227.24	218.08	202.80	196.82	202.10	218.00	219.44	212.10	195.04	188.40	189.93	205.65
Y 66.0	221.13	211.62	194.76	188.00	194.10	211.53	213.29	205.56	187.14	179.62	181.92	199.24
Y 67.0	215.08	205.26	186.87	179.20	186.12	205.10	207.37	199.25	179.18	170.85	173.98	192.85
Y 68.0	208.98	198.76	178.92	170.43	178.28	198.78	201.31	192.88	171.44	162.02	166.08	186.55
Y 69.0	203.03	192.42	170.96	161.37	170.43	192.43	195.37	186.63	163.71	153.04	158.34	180.47
Y 70.0	197.23	186.13	163.23	152.31	162.79	186.17	189.59	180.33	156.05	144.03	150.62	174.22
Y 71.0	191.43	179.98	155.68	143.36	155.30	180.06	183.73	174.42	148.47	135.15	142.95	168.31
Y 72.0	185.76	173.99	148.20	134.42	148.01	174.06	177.95	168.41	141.08	126.16	135.55	162.35
Y 73.0	180.07	167.98	141.04	125.44	140.72	168.20	172.31	162.45	133.98	117.38	128.29	156.51
Y 74.0	174.45	162.07	133.82	116.68	133.61	162.28	166.83	156.71	126.86	108.48	121.40	150.81
Y 75.0	168.93	156.21	126.83	107.67	126.63	156.52	161.24	151.02	120.06	99.68	114.50	145.05
Y 76.0	163.45	150.51	119.97	98.80	119.80	150.79	155.87	145.30	113.37	90.87	107.60	139.33
Y 77.0	158.16	144.92	113.35	90.20	113.26	145.18	150.42	139.82	106.68	82.24	101.04	134.03
Y 78.0	152.81	139.29	106.99	81.73	106.86	139.67	145.13	134.46	100.33	73.95	94.69	128.55
Y 79.0	147.59	133.90	100.85	73.53	100.61	134.35	139.94	129.14	94.26	65.88	88.68	123.40
Y 80.0	142.46	128.60	94.79	65.49	94.69	128.94	134.87	123.92	88.41	58.06	82.83	118.25
Y 81.0	137.40	123.33	88.84	57.68	88.80	123.71	129.73	118.74	82.70	50.42	77.19	113.09
Y 82.0	132.36	118.27	83.38	50.43	83.24	118.64	124.72	113.63	77.25	43.11	71.65	108.02
Y 83.0	127.42	113.07	77.87	43.51	77.95	113.69	119.86	108.60	71.87	36.37	66.39	102.99
Y 84.0	122.68	108.16	72.79	37.06	72.84	108.67	115.07	103.70	66.78	30.12	61.42	98.24
Y 85.0	117.84	103.35	67.86	31.17	67.93	103.85	110.23	98.93	62.11	24.61	56.74	93.67
Y 86.0	113.11	98.56	63.13	26.14	63.26	99.10	105.52	94.40	57.34	19.77	52.21	89.03
Y 87.0	108.35	93.97	58.57	21.80	58.75	94.53	100.89	89.77	53.05	15.72	47.94	84.60
Y 88.0	103.77	89.25	54.22	18.38	54.47	89.93	96.36	85.28	48.77	12.80	43.87	80.14
Y 89.0	99.35	84.89	50.25	16.05	50.50	85.60	92.04	80.87	44.81	10.99	39.97	75.92
Y 90.0	95.01	80.63	46.43	14.71	46.72	81.21	87.71	76.75	40.96	10.07	36.34	71.79
Y 91.0	90.65	76.43	42.71	14.40	43.14	77.12	83.45	72.62	37.54	9.88	32.94	67.89
Y 92.0	86.43	72.33	39.26	14.30	39.71	73.07	79.34	68.69	34.09	9.80	29.88	63.86
Y 93.0	82.34	68.29	36.12	14.23	36.52	69.10	75.32	64.70	30.96	9.69	26.97	60.17

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Candela Tabulation - (Cont.)

V/H	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0	C300.0	C330.0
Y 94.0	78.30	64.38	33.09	14.17	33.67	65.17	71.47	60.96	28.10	9.58	24.27	56.33
Y 95.0	74.33	60.85	30.43	14.07	30.95	61.49	67.61	57.24	25.42	9.40	21.79	52.82
Y 96.0	70.53	57.03	28.03	13.89	28.56	57.88	63.90	53.75	23.04	9.36	19.73	49.39
Y 97.0	66.89	53.72	25.84	13.78	26.42	54.49	60.39	50.55	20.98	9.32	17.83	46.23
Y 98.0	63.26	50.41	23.88	13.65	24.47	51.18	56.89	47.20	19.13	9.34	16.17	43.12
Y 99.0	59.77	47.22	22.21	13.53	22.79	47.91	53.48	44.11	17.49	9.22	14.80	40.10
Y 100.0	56.46	44.19	20.76	13.56	21.18	45.00	50.14	41.13	16.00	9.17	13.60	37.23
Y 101.0	53.24	41.26	19.48	13.38	19.95	42.12	47.07	38.34	14.78	9.16	12.53	34.70
Y 102.0	50.08	38.60	18.24	13.34	18.72	39.38	44.09	35.77	13.66	9.14	11.67	32.13
Y 103.0	47.17	36.28	17.16	13.18	17.76	36.88	41.23	33.32	12.65	9.10	10.85	29.93
Y 104.0	44.47	33.82	16.34	13.05	16.77	34.55	38.53	31.13	11.92	9.03	10.31	27.81
Y 105.0	41.81	31.45	15.52	12.92	15.98	32.26	36.00	28.62	11.27	9.06	9.72	24.97
Y 106.0	39.15	29.00	14.86	12.75	15.35	29.43	33.56	26.20	10.61	8.98	9.33	22.83
Y 107.0	36.72	26.95	14.30	12.69	14.67	27.12	30.83	24.29	10.02	8.97	8.94	21.13
Y 108.0	33.88	25.01	13.93	12.53	14.24	25.31	28.47	22.60	9.75	9.05	8.86	19.59
Y 109.0	31.84	23.55	13.65	12.47	13.85	23.93	26.38	21.15	9.44	9.01	8.69	18.24
Y 110.0	29.84	22.21	13.31	12.43	13.46	22.54	24.61	19.68	9.16	9.11	8.50	16.95
Y 111.0	28.00	20.85	13.23	12.41	13.20	21.22	22.91	18.21	9.01	9.01	8.41	15.84
Y 112.0	26.31	19.59	13.09	12.27	13.08	19.95	21.42	17.04	8.94	8.96	8.50	14.84
Y 113.0	24.67	18.40	13.00	12.16	12.91	18.92	20.06	15.95	8.77	9.06	8.60	13.97
Y 114.0	23.32	17.44	12.84	12.03	12.79	17.69	18.70	15.07	8.74	9.05	8.58	13.05
Y 115.0	21.88	16.51	12.81	12.02	12.67	16.84	17.39	14.30	8.82	9.10	8.66	12.45
Y 116.0	20.62	15.73	12.75	12.08	12.69	16.05	16.17	13.51	8.80	9.11	8.69	11.91
Y 117.0	19.44	15.03	12.73	11.97	12.59	15.34	15.25	12.88	8.76	9.24	8.71	11.43
Y 118.0	18.28	14.38	12.55	12.04	12.50	14.70	14.31	12.24	8.89	9.32	8.76	10.81
Y 119.0	17.42	13.75	12.45	11.99	12.41	14.17	13.49	11.71	8.90	9.35	8.76	10.59
Y 120.0	16.52	13.30	12.48	11.93	12.35	13.73	12.72	11.29	8.91	9.32	8.79	10.16
Y 121.0	15.82	13.00	12.45	11.87	12.23	13.36	12.16	10.85	8.90	9.31	8.79	10.01
Y 122.0	15.15	12.64	12.30	11.77	12.17	12.97	11.64	10.53	8.96	9.38	8.82	9.82
Y 123.0	14.54	12.45	12.20	11.73	11.98	12.61	11.12	10.35	9.03	9.21	8.81	9.72
Y 124.0	14.07	12.28	12.20	11.62	12.00	12.39	10.70	10.13	9.01	9.31	8.85	9.65
Y 125.0	13.65	12.13	12.11	11.55	12.00	12.18	10.35	10.09	9.01	9.31	8.81	9.60
Y 126.0	13.28	12.03	12.01	11.41	11.97	12.02	10.02	9.95	9.11	9.32	8.89	9.64
Y 127.0	13.13	12.03	11.98	11.47	11.95	11.91	9.79	9.89	9.10	9.30	8.93	9.61
Y 128.0	13.01	11.94	12.02	11.40	12.00	11.80	9.66	9.96	9.15	9.32	9.03	9.69
Y 129.0	12.85	11.91	11.83	11.48	11.94	11.82	9.58	9.88	9.26	9.49	9.08	9.72
Y 130.0	12.70	11.89	11.83	11.44	11.81	11.83	9.53	9.93	9.27	9.56	9.13	9.74
Y 131.0	12.67	11.84	11.79	11.40	11.80	11.83	9.49	10.01	9.36	9.47	9.22	9.84
Y 132.0	12.61	11.82	11.77	11.37	11.74	11.74	9.45	10.01	9.47	9.62	9.24	9.78
Y 133.0	12.56	11.75	11.72	11.32	11.80	11.63	9.52	10.02	9.55	9.62	9.33	9.80
Y 134.0	12.55	11.78	11.73	11.34	11.72	11.59	9.62	10.11	9.71	9.63	9.30	9.85
Y 135.0	12.53	11.78	11.77	11.44	11.69	11.55	9.70	10.19	9.71	9.72	9.41	9.97
Y 136.0	12.54	11.80	11.81	11.47	11.74	11.62	9.70	10.18	9.86	9.77	9.56	9.95
Y 137.0	12.50	11.62	11.77	11.37	11.74	11.55	9.73	10.21	9.85	9.90	9.71	9.99
Y 138.0	12.47	11.70	11.70	11.41	11.75	11.63	9.83	10.13	9.95	10.02	9.76	10.01
Y 139.0	12.43	11.70	11.87	11.47	11.73	11.60	9.86	10.31	9.95	9.94	9.87	10.07
Y 140.0	12.43	11.68	11.79	11.40	11.79	11.59	9.92	10.38	10.03	10.06	10.05	10.15

HAVIT COMMERCIAL
http://www.havitcommercial.com.au
Tel：02 9381 8383
E-mail:sales@havitcommercial.com.au

Candela Tabulation - (Cont.)

V/H	C0.0	C30.0	C60.0	C90.0	C120.0	C150.0	C180.0	C210.0	C240.0	C270.0	C300.0	C330.0
Y 141.0	12.38	11.74	11.69	11.55	11.86	11.60	9.94	10.39	10.13	10.12	10.12	10.12
Y 142.0	12.32	11.74	11.71	11.48	11.90	11.51	10.02	10.41	10.04	10.16	10.22	10.16
Y 143.0	12.26	11.67	11.74	11.48	12.05	11.63	10.04	10.47	10.13	10.14	10.29	10.29
Y 144.0	12.25	11.70	11.81	11.54	12.06	11.59	10.18	10.61	10.28	10.27	10.35	10.31
Y 145.0	12.24	11.70	11.77	11.47	12.10	11.65	10.23	10.55	10.27	10.45	10.42	10.39
Y 146.0	12.23	11.76	11.87	11.62	12.19	11.53	10.28	10.62	10.41	10.50	10.43	10.46
Y 147.0	12.23	11.76	11.96	11.63	12.15	11.59	10.35	10.71	10.48	10.57	10.46	10.49
Y 148.0	12.24	11.77	12.00	11.62	12.20	11.54	10.40	10.75	10.68	10.59	10.53	10.50
Y 149.0	12.25	11.88	12.02	11.80	12.19	11.60	10.39	10.88	10.83	10.68	10.49	10.57
Y 150.0	12.25	11.81	12.03	11.75	12.18	11.60	10.53	10.86	10.90	10.79	10.58	10.67
Y 151.0	12.16	11.82	12.04	11.81	12.07	11.63	10.59	10.97	11.04	10.91	10.68	10.75
Y 152.0	12.28	11.86	12.11	11.87	12.14	11.59	10.67	11.10	11.18	10.84	10.84	10.80
Y 153.0	12.17	11.89	12.20	11.90	12.12	11.63	10.81	11.16	11.20	11.00	10.95	10.96
Y 154.0	12.22	11.88	12.28	12.00	12.03	11.63	10.77	11.10	11.26	11.08	10.98	11.02
Y 155.0	12.19	12.01	12.15	12.02	12.15	11.69	10.91	11.22	11.18	11.20	11.16	11.13
Y 156.0	12.23	11.99	12.46	12.08	12.11	11.79	11.00	11.34	11.31	11.14	11.22	11.11
Y 157.0	12.23	12.10	12.44	12.00	12.15	11.88	11.06	11.42	11.36	11.34	11.30	11.25
Y 158.0	12.26	12.03	12.44	12.09	12.20	11.90	11.07	11.51	11.46	11.47	11.44	11.36
Y 159.0	12.24	12.12	12.52	12.18	12.25	11.86	11.22	11.57	11.52	11.54	11.45	11.34
Y 160.0	12.35	12.11	12.54	12.16	12.26	11.95	11.28	11.62	11.64	11.60	11.56	11.46
Y 161.0	12.35	12.18	12.57	12.15	12.32	11.99	11.30	11.63	11.65	11.66	11.54	11.59
Y 162.0	12.45	12.18	12.64	12.24	12.34	11.99	11.44	11.61	11.68	11.66	11.52	11.63
Y 163.0	12.46	12.20	12.57	12.23	12.37	11.94	11.50	11.71	11.75	11.75	11.55	11.69
Y 164.0	12.53	12.28	12.68	12.34	12.41	12.06	11.56	11.81	11.95	11.81	11.66	11.74
Y 165.0	12.52	12.40	12.51	12.35	12.42	12.07	11.66	11.81	11.99	11.86	11.80	11.79
Y 166.0	12.66	12.47	12.68	12.30	12.48	12.15	11.65	12.02	12.03	11.99	11.80	11.81
Y 167.0	12.71	12.40	12.58	12.42	12.47	12.12	11.69	11.98	12.07	12.07	11.94	11.94
Y 168.0	12.71	12.41	12.60	12.39	12.49	12.20	11.81	12.13	12.11	12.10	11.97	11.94
Y 169.0	12.79	12.41	12.60	12.39	12.61	12.23	11.79	12.11	12.15	12.06	12.04	12.06
Y 170.0	12.85	12.40	12.57	12.56	12.57	12.23	12.00	12.24	12.17	12.10	12.11	12.06
Y 171.0	12.82	12.52	12.64	12.50	12.52	12.22	11.99	12.28	12.27	12.20	12.18	12.12
Y 172.0	12.81	12.55	12.69	12.50	12.55	12.26	12.11	12.29	12.33	12.17	12.18	12.13
Y 173.0	12.80	12.44	12.63	12.48	12.52	12.27	12.11	12.31	12.39	12.25	12.15	12.20
Y 174.0	12.83	12.41	12.58	12.55	12.54	12.34	12.16	12.31	12.37	12.39	12.19	12.30
Y 175.0	12.78	12.46	12.57	12.58	12.52	12.32	12.16	12.50	12.40	12.39	12.17	12.34
Y 176.0	12.77	12.48	12.49	12.57	12.44	12.30	12.26	12.49	12.43	12.40	12.25	12.31
Y 177.0	12.77	12.45	12.54	12.56	12.53	12.25	12.31	12.51	12.52	12.51	12.31	12.32
Y 178.0	12.75	12.53	12.59	12.63	12.45	12.25	12.39	12.53	12.49	12.40	12.32	12.34
Y 179.0	12.81	12.48	12.63	12.61	12.40	12.29	12.38	12.52	12.40	12.60	12.43	12.48
Y 180.0	12.52	12.52	12.52	12.52	12.52	12.52	12.52	12.52	12.52	12.52	12.52	12.52