
Adjustable Wattage High Bay Installation Instructions

Product Specifications	
Model No.	HCP-2920000
Material	Aluminium
Colour	Black
Installation Type	Suspended
IP Rating	IP65
Input Voltage	240v AC (Flex & Plg Included)
Protection Class	1 (Earth Required)
Lamp Base	Built in LED
Lamp Wattage	Adjustable - 120w, 160w, 200w
Colour Temp	Tri Colour - 3000k, 4500k, 6000k
Lumens	16800lm - 30000lm
Beam Angle	90°
CRI	> 80
Dimmable	No
Warranty	5 Years Replacement*

Dimensions

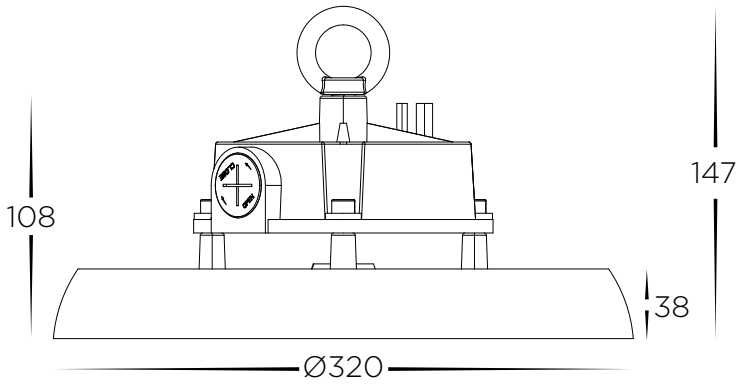

Important Safety Issues:

- This product must be installed by a qualified electrician according to AS/NZS 3000.
- Ensure all electrical mains are disconnected before any installation.
- Modification of this product will void any warranty.
- Havit Commercial does not take responsibility for wrong installation, incorrect use, or use of installation material that does not belong to the system.
- Aluminium and 304SS fittings must not be installed within 2km of any salt water environments.
  All o-rings and seals must be in place correctly to maintain warranty
- This form may be updated at any time due to product improvements, please check online installation form for most current version.

Steps for Installation:

1. Make sure that the electrical circuit is free of voltage (master switch off)
2. Before installing,
   - Adjust wattage by undoing cap and selecting desired wattage
   - Adjust Colour Temp by undoing cap and selecting desired Colour Temp
3. Hang appropriate chain (not included) to hang High Bay.
4. Attach High bay to chain.
5. Connect flex and plug to plug base.
6. All connections must be carried out carefully, inspect all contacts before switching back on the electric circuit.





Must be installed by a licensed electrician

Contact Details:

8/133 Beauchamp Road Matraville NSW 2036 Australia

Tel: 02 9381 8383
Email: sales@havitcommercial.com.au
Web: www.havitcommercial.com.au

Warranty Terms & Conditions*

www.havitcommercial.com.au